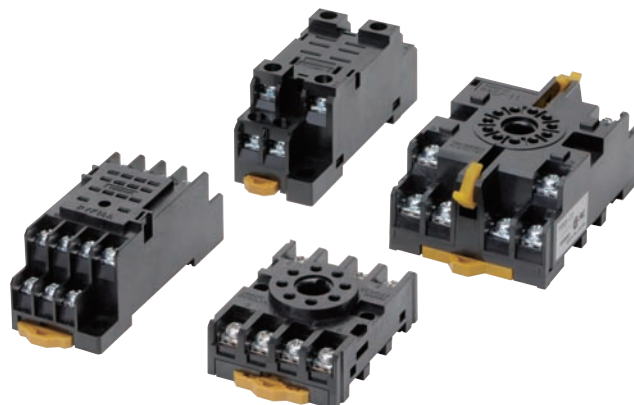


Products Related to Common Sockets and DIN Tracks

CSM_common_sockets_DS_E_3_5

A Wide Variety of Square and Round Sockets in Front-mounting and Back-mounting Models

- Models available with finger protection.
- Hold-down Clips and Socket Bridges for PYF Sockets are also available.
- New screwless models available.



Models Used with Common Sockets

Sockets

Item		Model	Number of pins	Applicable Sockets	
Group name				Front-mounting	Back-mounting
Proximity Sensors	E2C	E2C-AM4A	8	P2CF-08	P3G
		E2C-AK4A	11	P2CF-11	P3GA
		E2C-GE4A	8	PYF08A	PY
		E2C-GF4A			
Level Devices	61F	61F-GP-N8	8	PF083A	PL
		61F-APN2		8PFA1	
		61F-UHS		8PFA	
		61F-HSL	11	PF113A	
		61F-03B, -04B			
		61F-GP-N			
		61F-GPN-V50			
	61F-GPN-BT/BC	14	14PFA		
	61F-IP				
	61F-G1P, -G2P				
K7L	K7L-AT50/AT50D K7L-U/-UD	8	P2RF-08(-E)	---	
General-purpose Relays and Solid-state Relays	MY (Q, K, H)	MY1, MY2	8	PYF	PY
		MY3	11		
		MY4, MYQ4	14		
		MY4Z-CBG MY2K, MY4H			
	LY	LY1, LY2	8	PTF	PT
		LY3	11		
		LY4	14		
	G7K	G7K-412S		---	
	G2A(K)	G2A, G2A-434 G2AK	14	PYF	PY
	MK(K)	MK2P	8	PF083A(-E)	PL
		MK3P MK2KP	11	PF113A(-E)	

Item		Model	Number of pins	Applicable Sockets	
Group name				Front-mounting	Back-mounting
General-purpose Relays and Solid-state Relays	MM	MM2(X)P	8	8PFA	PL
		MM3P MM2(X)KP	11	PFA	
		MM3XP MM3(X)KP MM4(X)P MM4(X)KP	14		
	G4Q	---	8	8PFA1	PL
	G3F	G3F(D) Series G3FM	8	PYF	PY
	G3H	G3H(D) Series		PTF	PT
	G3B	G3B(D) Series		PF083A	PL
	G9H	G9H-2□□S		PTF	PT
	G2R	G2R-1-S□	5	P2RF-05□	P2R -05□
		G2R-2-S□	8	P2RF-08□	P2R -08□
	G3R	---	5	P2RF-05□	P2R -05□
	G7T G3TA	G7T G3TA	5	P7TF-05	---
	G7S	G7S-4A2B-E G7S-3A3B-E	14	P7S-14F-END	P7S -14P-E
	G7SA	G7SA-3A1B G7SA-2A2B	10	P7SA-10F P7SA-10F-ND	P7SA □-10P
		G7SA-5A1B G7SA-4A2B G7SA-3A3B	14	P7SA-14F P7SA-14F-ND	P7SA □-14P
Timers	H3CA	H3CA-8(H)	8	P2CF	P3G PL
		H3CA-A	11		P3GA PL
	H5CN	H5CN-□M	11		P3GA
		Other H5CN models	8		P3G
	H5CX	H5CX-L8□	8		P3G
		H5CX-A11□	11		P3GA
	H5CZ	H5CZ-L8□	8		P3G

Products Related to Common Sockets and DIN Tracks

Item		Model	Number of pins	Applicable Sockets	
Group name				Front-mounting	Back-mounting
Timers	H3CR	H3CR-A8□ H3CR-F8□ H3CR-G8□ H3CR-H8□	8	P2CF	P3G PL
		H3CR-A H3CR-AS H3CR-AP H3CR-F H3CR-FN H3CR-HRL	11		P3GA PL
	H3M	---	8	PF085A	P3G PL
	H3Y	H3Y-2	8	PYF	PY
		H3Y-4	14		
	H3YN	H3YN-2□	8		
		H3YN-4□	14		
	H3RN	H3RN-1□	5	P2RF-□-E	P2R □-□7P
		H3RN-2□	8		
	RD2P	---	8	8PFA1	PL
	H2C	---	8	P2CF PF085A	P3G PL
Counters	H7CX	H7CX-A11□	11	P2CF	P3GA
	H7CZ	H7CZ-L8□	8		P3G
	H7CN	H7CN-□M	11		P3GA
		Other H7CN models	8		P3G
Temperature Controllers	E5CC	E5CC-□U	11		P3GA
	E5C2	---	8		P3G
	E5CS	E5CS-□1, □2	11		P3GA
		Other E5CS models	8		P3G
	E5L	---	14	PTF14A	---
Signal Converters	K3FK	K3FK models not listed below	8	8PFA (Included with Converter)	---
		K3FK-G□ K3FK-GS□ K3FK-SL-75-□	11	11PFA (Included with Converter)	
Component Protective Components	SE	SE-KP□N	8	8PFA1	---
	SAO	SAO-□		PF083A	PL08
	APR	APR-S APR-S380/-S440		11	P2CF-11
	K2CU	K2CU-P	8	8PFA1	---
	SDV	SDV-F□□/-FH□T		14	14PFA
		SDV-D□□	14	14PFA	PL15
	LG2	LG2-□	8	PF083A	PL08
	K6EL	K6EL-□	11	P2CF-11	PL11 and P3GA-11
Products for High-voltage Power Receiving Equipment	AGF	AGF-1-P5	8	8PFA1	---
Annunciators	MYA	MYA-NA1, -NB1	8	PF083A	PL
		MYA-NA2, -NB2 MYA-LA1, -LB1 MYA-LA2, -LB2 MYA-LA12, -LB12	11	PF113A	

Hold-down Clips For Square Sockets

Sockets	PYF□A PTF□A	PYF08M	PY□(QN) PT□(QN)	PY□-02 PT□-0
Applicable models	MY□, MY□N, MY□-D, MY2□-CR, MY4□-CR, MY42□-CR, MY□-TU, MY2K, MY□N-D2, LY□, LY□N, LY□-TU, MYQ□, G3H(D) Series, G3F(D) Series, G3FM, and G9H	PYC PYC-P	PYC-P PYC-S	PYC-P
MY□□ * LY□□	---	---	PYC-P2	---
MY4H	---	---	PYC-P	---
MY2Z□-CR MY3□-CR LY□-CR	Y92H-3	---	PYC-1	---
G2A(K) Series	PYC-A2	---	PYC-2 PYC-3 PYC-5	PYC-3 PYC-5
G7K	PKC	---	---	---
H3Y	Y92H-3	---	Y92H-4	---

Note: The □ in the model number is replaced with 08, 11, or 14.
* If you use a Hold-down Clip with the MY2I, you cannot use the PYF08A.
Use the PYF14A.














For Round Sockets

Sockets	PF083A PF113A	PL08 (-Q) PL11 (-Q)	PLE08-0 PLE11-0	P2CF-11
Applicable models	61F-03B, -04B	PFC-A1	PLC	PLC-10
61F-GP-N, -GPN-BT 61F-GP-N8 ?61F-APN2	PFC-N8	PHC-5	---	
MK2P Series, MK2KP, MK3P□(-US), and G3B(D) Series	PFC-A1	PLC	---	
MK3ZP MK3LP	---	PLC-1	---	---
MYA-NA1, -NB1 MYA-LA1, -LB1 MYA-NA2, -NB2 MYA-LA2, -LB2	PFC-A6	PLC-7	---	---
MYA-LA12, -LB12	PFC-A7	PLC-8	---	---
APR-S	PFC-A6	PLC-7	---	---
APR-S380/-S440	---	---	---	Y92H-1
LG2	PFC-A7	PLC-8	---	---
K6EL	---	Y92H-1	---	---

Note: 1. The 8PFA(1), 11PFA, and 14PFA are held with hooks.
2. The PL15, PL20, and PF202, as well as models not given in the above table, require panel processing for installation.
3. The PF085A Hold-down Clip is included with the H3M and H2A. It is an option (sold separately) for the H2C.

Ordering Information

Square Sockets

Model Number of pins	P2RF (front-mounting), page 9			P2R (back-mounting), pages 11 and 12			P7TF (front-mounting), page 12
				Solder terminals	PCB terminals		
5 pins	P2RF-05 Approx. 27 g	P2RF-05-E* Approx. 38 g	P2RF-05-S Approx. 36 g	P2R-05A Approx. 5 g	P2R-05P Approx. 5 g	P2R-057P Approx. 5.5 g	P7TF-05 Approx. 28 g
							
8 pins	P2RF-08 Approx. 33 g	P2RF-08-E* Approx. 38 g	P2RF-08-S Approx. 40 g	P2R-08A Approx. 5 g	P2R-08P Approx. 5 g	P2R-087P Approx. 5.5 g	—
							


















Note: 1. The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.

2. To remove the Relay, pull the lever on the Socket with your fingers supporting the lever and the opposite side of the Relay case, and jiggle the Relay.

* Use a #1 Phillips screwdriver to tighten the screws on this Socket.

Minimum Order Lot The following models are available at the minimum order lot specified below.

Number of pins	Model	P2RF	P2R	P7TF	Minimum order lot (pcs)
5 pins		P2RF-05	P2R-05A P2R-05P	P7TF-05	10
8 pins		P2RF-08	P2R-08A P2R-08P	---	

Model	PYF (front-mounting), page 14	PY (back-mounting), page 15			
		Solder terminals		Wrapping terminals	PCB terminals
8 pins	PYF08A Approx. 32 g  PYF08A-E[*]  PYF08M Approx. 26 g  PYF08S Approx. 46 g 	PY08 Approx. 8 g  PY08-Y1 PY08-Y3 	PY08QN Approx. 12 g PY08QN2 	PY08QN-Y1 PY08QN2-Y1 	PY08-02² Approx. 7.2 g 
11 pins	PYF11A Approx. 43 g 	PY11 Approx. 9 g  PY11-Y1 	PY11QN PY11QN2 	PY11QN-Y1 PY11QN2-Y1 	PY11-02² 
14 pins	PYF14A Approx. 49 g  PYF14A-E[*]  PYF14T Approx. 53 g  PYF14S Approx. 62 g 	PY14 Approx. 10 g  PY14-Y1 PY14-Y3 	PY14QN Approx. 14 g PY14QN2 	PY14QN-Y1 PY14QN2-Y1 PY14QN-Y3 PY14QN2-Y3 	PY14-02² 











Products Related to Common Sockets and DIN Tracks

Note: 1. The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.

2. Refer to Models with Standards Certification for detailed information on the models of Common Sockets that are certified for standards.

*1. Use a #1 Phillips screwdriver to tighten the screws on this Socket.

*2. The structure does not resist flux. Manual soldering is recommended for this product.

Model Number of pins	PTF (front-mounting), page 17		PT (back-mounting), page 18		
			Solder terminals	Wrapping terminals	PCB terminals
8 pins	PTF08A Approx. 47 g 	PTF08A-E *1 	PT08 Approx. 11 g 	PT08QN Approx. 10.4 g 	PT08-0 *2 Approx. 8 g 
11 pins	PTF11A Approx. 61 g 		PT11 Approx. 13 g 	PT11QN 	PT11-0 *2 Approx. 12.2 g 
14 pins	PTF14A Approx. 77 g 	PTF14A-E *1 	PT14 Approx. 17 g 	PT14QN Approx. 20 g 	PT14-0 *2 Approx. 16.2 g 

Note: The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.


* Use a #1 Phillips screwdriver to tighten the screws on this Socket.






* The structure does not resist flux. Manual soldering is recommended for this product.

Minimum Order Lot

The following models are available at the minimum order lot specified below.

Number of pins	Model	PYF	PY	PTF	PT	Minimum order lot (pcs)
8 pins		PYF08A PYF08M	PY08	PTF08A	PT08	10
11 pins		PYF11A	PY11	PTF11A	PT11	
14 pins		PYF14A	PY14	PTF14A	PT14	















Model Number of pins	P7LF (front-mounting), page 20
6 pins	P7LF-06 Approx. 60 g 

Model Number of pins	P7S/P7SA, pages 20 and 21	
	Front-mounting	PCB terminals
10 pins	P7SA-10F Approx. 44 g P7SA-10F-ND Approx. 44 g 	P7SA-10P Approx. 9 g 
14 pins	P7S-14F-END Approx. 110 g  P7SA-14F Approx. 59 g P7SA-14F-ND Approx. 59 g 	P7S-14P-E Approx. 25 g  P7SA-14P Approx. 10 g 

Note: Refer to Models with Standards Certification for detailed information on the models of Common Sockets that are certified for standards.

Products Related to Common Sockets and DIN Tracks

Round Sockets

Model Number of pins	PF (front-mounting), page 22	P2CF (front-mounting), page 23	PFA (front-mounting), page 24	P3G (back-mounting), page 25	PL (back-mounting), page 26		
					Solder terminals	Wrapping terminals	PCB terminals
8 pins	PF083A Approx. 34 g 	P2CF-08 Approx. 55 g 	8PFA Approx. 57 g 	P3G-08 Approx. 40 g 	PL08 Approx. 14 g 	PL08-Q Approx. 15 g 	PLE08-0 Approx. 10.6 g 
	PF083A-E * 	P2CF-08-E 	8PFA1 Approx. 66 g 	Note: The Y92A-48G Terminal Cover can be used to provide finger protection.			
	PF085A Approx. 40 g 						
11 pins	PF113A Approx. 47 g 	P2CF-11 Approx. 70 g 	11PFA Approx. 74 g 	P3GA-11 Approx. 47 g 	PL11 Approx. 15 g 	PL11-Q Approx. 18.5A 	PLE11-0 Approx. 10.8 g 
	PF113A-E * 	P2CF-11-E 		Note: The Y92A-48G Terminal Cover can be used to provide finger protection.			
14 pins	---	---	14PFA Approx. 104 g 	---	PL15 Approx. 28 g 	---	---
20 pins	---	---	---	---	PL20 Approx. 17 g 	---	---


Note: The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.
* Use a #1 Phillips screwdriver to tighten the screws on this Socket.

Minimum Order Lot

The following models are available at the minimum order lot specified below.

Number of pins	Model	PF	P2CF	PFA	P3G	PL
8 pins		PF083A, PF085A	P2CF-08, P2CF-08-E	8PFA, 8PFA1	P3G-08	PL08
11 pins		PF113A	P2CF-11, P2CF-11-E	11PFA	P3GA-11	PL11
14 pins		---	---	14PFA	---	PL15
Minimum order lot (pcs)		20	10	20	10	

Terminal Cover

Model	Y92A-48G
Appearance	

Note: Refer to Models with Standards Certification for detailed information on the models of Common Sockets that are certified for standards.

Products Related to Common Sockets and DIN Tracks

Hold-down Clips For Square Sockets

(Unit: mm)

PKC One Set (2 Clips) 	PTC-1 	PYC-A1 Approx. 0.54 g One Set (2 Clips) 	PYC-A2 One Set (2 Clips) 	PYC-E1 One Set (2 Clips) 	PYC-P Approx. 1.4 g
PYC-P2 Approx. 1.2 g 	PYC-S Approx. 1.8 g 	PYC-1 Approx. 6 g 	PYC-2 	PYC-3 	PYC-5
PYC Approx. 0.2 g 	Y92H-1 	Y92H-3 One Set (2 Clips) 	Y92H-4 		

For Round Sockets

PFC-A1 Approx. 2.2 g One Set (2 Clips) 	PFC-A6 Approx. 2.4 g One Set (2 Clips) 	PFC-A7 Approx. 3.0 g One Set (2 Clips) 	PLC Approx. 2.4 g One Set (2 Clips) 	PLC-1 Approx. 2.6 g One Set (2 Clips) 	PLC-7 Approx. 3.0 g One Set (2 Clips) 																			
PLC-8 Approx. 6.4 g One Set (2 Clips) 	PLC-10 Approx. 2.0 g One Set (2 Clips) 	PLC-12 Approx. 5.4 g One Set (2 Clips) 	Minimum Order Lot The following models are available at the minimum order lot specified below. <table><tr><th>Type</th><th>Model</th><th>Minimum order lot (pcs)</th></tr><tr><td rowspan="6">For Square Sockets</td><td>PYC-A1 PYC-P</td><td>100</td></tr><tr><td>PYC-A2 PYC-S PYC-1 PYC-2 PYC-3</td><td>10</td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>			Type	Model	Minimum order lot (pcs)	For Square Sockets	PYC-A1 PYC-P	100	PYC-A2 PYC-S PYC-1 PYC-2 PYC-3	10											
Type	Model	Minimum order lot (pcs)																						
For Square Sockets	PYC-A1 PYC-P	100																						
	PYC-A2 PYC-S PYC-1 PYC-2 PYC-3	10																						

Specifications

Socket Characteristics

Model	Continuous carry current	Dielectric strength	Insulation resistance*1	Remarks
P2RF-05(-E)(-S)	10 A	Between contact terminals of same polarity: 1,000 VAC for 1 min	1,000 MΩ min.	
		Between coil and contact terminals: 4,000 VAC for 1 min		
P2RF-08(-E)(-S)	5 A	Between contact terminals of different polarity: 3,000 VAC for 1 min	1,000 MΩ min.	
		Between contact terminals of same polarity: 1,000 VAC for 1 min		
		Between coil and contact terminals: 4,000 VAC for 1 min		
P2R-05P	10 A	Between contact terminals of same polarity: 1,000 VAC for 1 min	1,000 MΩ min.	
		Between coil and contact terminals: 4,000 VAC for 1 min		
P2R-08P	5 A	Between contact terminals of different polarity: 3,000 VAC for 1 min	1,000 MΩ min.	
		Between contact terminals of same polarity: 1,000 VAC for 1 min		
		Between coil and contact terminals: 4,000 VAC for 1 min		
P2R-057P	10 A	Between contact terminals of same polarity: 1,000 VAC for 1 min	1,000 MΩ min.	
		Between coil and contact terminals: 5,000 VAC for 1 min		
P2R-087P	5 A	Between contact terminals of different polarity: 3,000 VAC for 1 min	1,000 MΩ min.	
		Between contact terminals of same polarity: 1,000 VAC for 1 min		
		Between coil and contact terminals: 5,000 VAC for 1 min		
P2R-05A	10 A	Between contact terminals of same polarity: 1,000 VAC for 1 min	1,000 MΩ min.	
		Between ground terminals: 1,500 VAC for 1 min		
		Between coil and contact terminals: 4,000 VAC for 1 min		
P2R-08A	5 A	Between contact terminals of different polarity: 3,000 VAC for 1 min	1,000 MΩ min.	
		Between contact terminals of same polarity: 1,000 VAC for 1 min		
		Between ground terminals: 1,500 VAC for 1 min		
		Between coil and contact terminals: 4,000 VAC for 1 min		
P7TF-05	5 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PYF08A(-E)(-S)	7 A, -S models: 10 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	The continuous carry current of 10 A for the PYF08S is for an ambient temperature of 55°C. At an ambient temperature of 70°C, the value is 7 A.
PYF11A	5 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PYF14A(-E)(-S)	3 A, -S models: 5 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PY08(-Y1)	7 A	Between terminals: 1,500 VAC for 1 min	1,000 MΩ min.	
PY08QN(-Y1)	7 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY08-02	7 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY11(-Y1)	5 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY11QN(-Y1)	5 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY11-02	5 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY14(-Y1)	3 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY14QN(-Y1)	3 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PY14-02	3 A	Between terminals: 1,500 VAC for 1 min	100 MΩ min.	
PTF□□A(-E)	10 A	Between terminals: 2,000 VAC for 1 min	100 MΩ min.	
PT□□	10 A	Between terminals: 2,000 VAC for 1 min	100 MΩ min.	
PT□□QN	10 A	Between terminals: 2,000 VAC for 1 min	100 MΩ min.	
PT□□-0	10 A	Between terminals: 2,000 VAC for 1 min	100 MΩ min.	
P7LF-06	30 A	Between contact terminals of different polarity: 2,000 VAC for 1 min	1,000 MΩ min.	
		Between contact terminals of same polarity: 2,000 VAC for 1 min		
		Between coil and contact terminals: 4,000 VAC for 1 min		
PF□□□A	5 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
P2CF	5 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
P3G(A)	6 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
8PFA(1)	10 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
11PFA(1)	10 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PL□(-Q)	10 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
PLE□□-0	10 A	Between terminals: 2,000 VAC for 1 min	1,000 MΩ min.	
P6D-04P	5 A	Between contact terminals of same polarity: 1,000 VAC for 1 min	100 MΩ min.	
		Between coil and contact terminals: 3,000 VAC for 1 min		
P7S-14□-E(ND)	10 A	Between contact terminals of different polarity: 2,000 VAC for 1 min	1,000 MΩ min.	
		Between contact terminals of same polarity: 1,500 VAC for 1 min		
		Between coil and contact terminals: 2,000 VAC for 1 min		

Products Related to Common Sockets and DIN Tracks

Model	Continuous carry current	Dielectric strength	Insulation resistance*1	Remarks
P7SA-10□	6 A *2	Between contact terminals of different polarity: 2,500 VAC for 1 min	1,000 MΩ min.	
		Between contact terminals of same polarity: 1,500 VAC for 1 min		
		Between coil and contact terminals: 2,500 VAC for 1 min		
P7SA-14□	6 A *2	Between contact terminals of different polarity: 2,500 VAC for 1 min	1,000 MΩ min.	
		Between contact terminals of same polarity: 1,500 VAC for 1 min		
		Between coil and contact terminals: 2,500 VAC for 1 min		

*1. The insulation resistance was measured with a 500-VDC insulation resistance meter at the same places as those used for measuring the dielectric strength.

*2. There are restrictions in the current. Refer to the *General Catalog for the OMRON Safety Components* (Cat. No. Y106) for details.

Safety Precautions

Refer to *Common Relay Precautions* for general precautions.

Dimensions

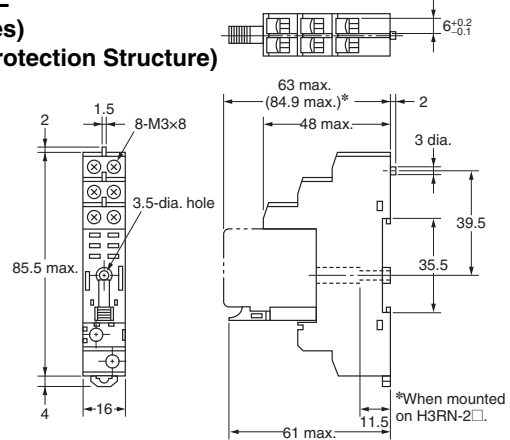


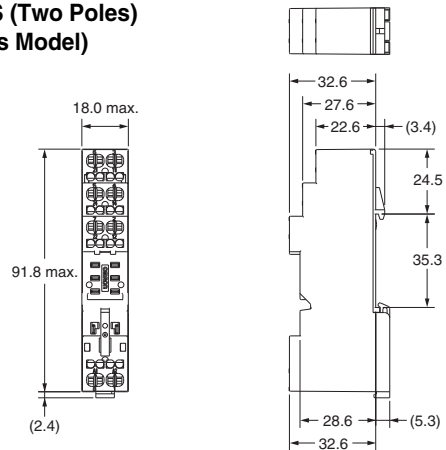

P2RF

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P2RF-05 (One Pole)	(Top View)	(Top View) Note: Track mounting is also possible. Refer to page 27.
P2RF-05-E (One Pole) (Finger Protection Structure)	(Top View) Note: Figures in parentheses indicate DIN standard numbers.	(Top View) Note: Track mounting is also possible. Refer to page 27.
P2RF-05-S (One Pole) (Screwless Model)	(Top View) Note: Figures in parentheses indicate DIN standard numbers.	---
P2RF-08 (Two Poles)	(Top View)	(Top View) Note: Track mounting is also possible. Refer to page 27.

P2RF

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P2RF-08-E (Two Poles) (Finger Protection Structure)  Technical drawing of P2RF-08-E showing front, side, and top views with dimensions. Front view shows a height of 85.5 max. and a width of 16. Side view shows a total width of 61 max. and a mounting hole diameter of 3.5. Top view shows a height of 39.5 and a width of 48 max. (84.9 max.)*. Dimensions include 2, 1.5, 8-M3x8, 3.5-dia. hole, 63 max., (84.9 max.)*, 48 max., 2, 3 dia., 39.5, 35.5, 11.5, 61 max., and 4.	 (Top View) Note: Figures in parentheses indicate DIN standard numbers.	 (Top View) Note: Track mounting is also possible. Refer to page 27.
P2RF-08-S (Two Poles) (Screwless Model)  Technical drawing of P2RF-08-S showing front and side views with dimensions. Front view shows a height of 91.8 max. and a width of 18.0 max. Side view shows a total width of 32.6 and a mounting hole diameter of 3.4. Dimensions include 18.0 max., 91.8 max., 32.6, 27.6, 22.6, (3.4), 24.5, 35.3, 28.6, (5.3), and 32.6.	 (Top View) Note: Figures in parentheses indicate DIN standard numbers.	

Note: 1. If an I/O SSR or Indicator Module is used, the polarity of terminal 1 is negative.
2. Refer to pages 28 and 30 for the features of Screwless Sockets and for precautions for correct use.

Products Related to Common Sockets and DIN Tracks

P2R

(Unit: mm)

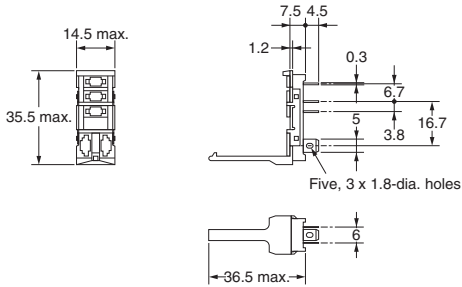


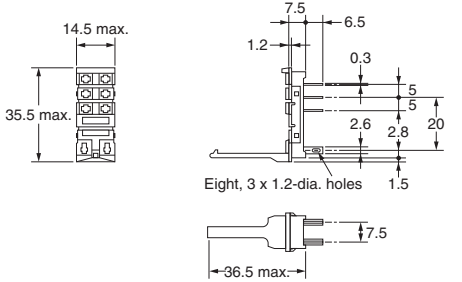

Dimensions	Terminal Arrangement/ Internal Connections	PCB Dimensions
P2R-05P (One Pole) 	 (Bottom View)	 (Bottom View)
P2R-08P (Two Poles) 	 (Bottom View)	 (Bottom View)
P2R-057P (One Pole) 	 (Bottom View)	 (Bottom View)
P2R-087P (Two Poles) 	 (Bottom View)	 (Bottom View)

Note: If an I/O SSR or Indicator Module is used, the polarity of terminal 1 is negative.

Products Related to Common Sockets and DIN Tracks

P2R

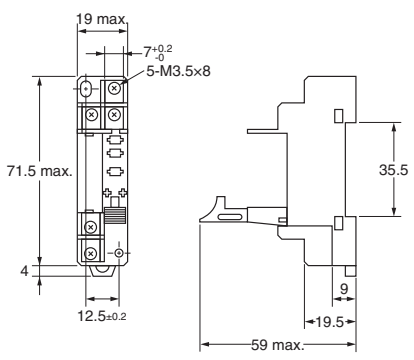


(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P2R-05A (One Pole) 	 (Bottom View)	 (Use panel with thickness of 1.6 to 2.0 mm.)
P2R-08A (Two Poles) 	 (Bottom View)	(Use panel with thickness of 1.6 to 2.0 mm.)

Note: If an I/O SSR or Indicator Module is used, the polarity of terminal 1 is negative.

P7TF

(Unit: mm)

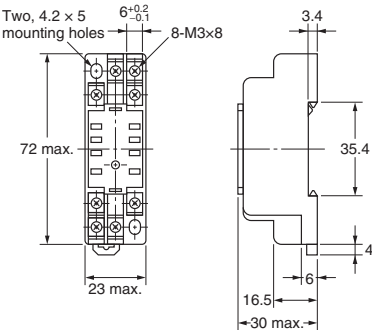
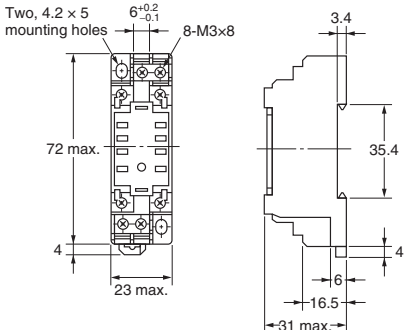


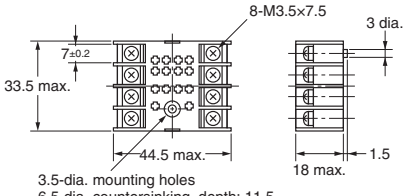


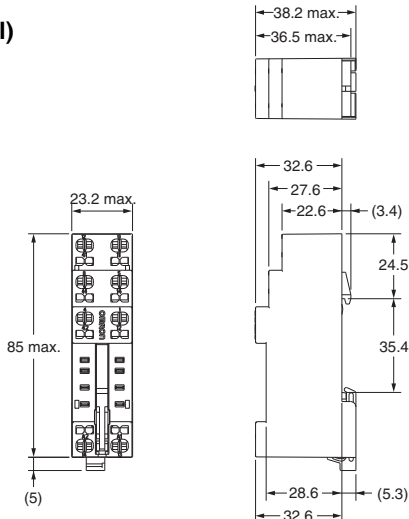

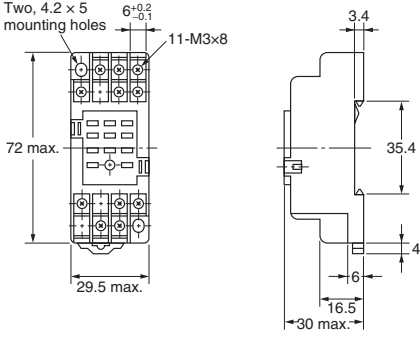


Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P7TF-05 	 (Top View)	 (Top View) Note: Track mounting is also possible. Refer to page 27. * We recommend that you use washers if you use M3 bolts or screws. Washers are not required with M4 bolts or screws.

Note: If an I/O SSR or Indicator Module is used, the polarity of terminal 1 is positive.

Products Related to Common Sockets and DIN Tracks

PYF


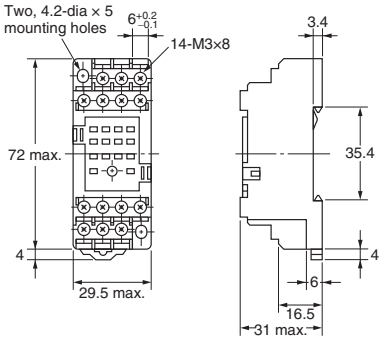






(Unit: mm)

Dimensions	Terminal Arrangement/Internal Connections	Mounting Hole Dimensions
PYF08A  PYF08A-E (Finger Protection Structure) 	 (Top View)	 (Top View) Note: Track mounting is also possible. Refer to page 27.
PYF08M 	 (Top View)	
PYF08S (Screwless Model) 	 (Top View) Note: Figures in parentheses indicate DIN standard numbers.	—
PYF11A 	 (Top View)	 (Top View) Note: Track mounting is also possible. Refer to page 27.

Products Related to Common Sockets and DIN Tracks

PYF

(Unit: mm)



Dimensions	Terminal Arrangement/Internal Connections	Mounting Hole Dimensions
PYF14A  Two, 4.2 × 5 mounting holes 6± 0.2 14-M3×8 72 max. 29.5 max. 3.4 35.4 4 16.5 30 max.	PYF14A-E (Finger Protection Structure)  Two, 4.2-dia × 5 mounting holes 6± 0.2 14-M3×8 72 max. 29.5 max. 3.4 35.4 4 16.5 31 max.	 Two M3 or M4 or 4.5-dia. holes 59± 0.3 22± 0.2 (Top View) Note: Track mounting is also possible. Refer to page 27.
PYF14T  Two, 4.2-dia × 5 mounting holes 33 max. 7± 0.2 70 max. 17.4 14-M3.5×8 4 30 23.5 11.5 11 35.5 17.8 10	 (Top View)	 2-M4 59 24.5 (Top View) Note: Track mounting is also possible. Refer to page 27.
PYF14S (Screwless Model)  85 max. 31 max. 14-M3.5×8 (4.15) 36.5 max. 32.6 27.6 22.6 (3.4) 24.55 35.4 28.6 32.6	 (Top View) Note: Figures in parentheses indicate DIN standard numbers.	

Note: Refer to pages 28 and 30 for the features of Screwless Sockets and for precautions for correct use.

Products Related to Common Sockets and DIN Tracks





Relay Sockets and Socket Bridges for PYF

Bridges within the Same Socket

Pitch	Applicable models	Appearance	Dimensions (mm)	Model	Specifications
7 mm	PYF14A			PYD-020B□(2P)	Max. carry current: 20 A (18 A at 70°C) Ambient operating temperature: -40 to 70°C (with no icing or condensation) Ambient operating humidity: 45% to 85% (with no icing or condensation) Conductor material: Brass Conductor surface treatment: Nickel plating Package qty: 50/bag
				PYD-030B□(3P)	

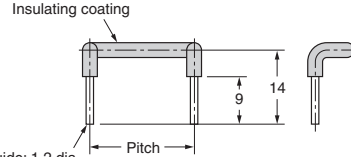
Note: 1. The □ in the model number is replaced with the insulation color specification code. B: Black, Y: Yellow
 2. Specify the number of bags when ordering.

Bridges between Adjacent Sockets

Pitch	Applicable models	Appearance	Dimensions (mm)	Model	Specifications
22 mm	PYF08A			PYD-025B□(2P)	Max. carry current: 20 A (18 A at 70°C) Ambient operating temperature: -40 to 70°C (with no icing or condensation) Ambient operating humidity: 45% to 85% (with no icing or condensation) Conductor material: Brass Conductor surface treatment: Nickel plating Package qty: 10/bag
				PYD-085B□(8P)	
29 mm	PYF14A			PYD-026B□(2P)	Max. carry current: 20 A (18 A at 70°C) Ambient operating temperature: -40 to 70°C (with no icing or condensation) Ambient operating humidity: 45% to 85% (with no icing or condensation) Conductor material: Brass Conductor surface treatment: Nickel plating Package qty: 10/bag
				PYD-086B□(8P)	

Note: 1. The □ in the model number is replaced with the insulation color specification code. B: Black, S: Blue, R: Red
 2. Specify the number of bags when ordering.

Socket Bridges

Pitch	Applicable models	Appearance and dimensions (mm)	Model	Insulation color
19.7 mm	PYF08S		PYDM-08SR	Red
			PYDM-08SB	Blue
27.5 mm	PYF14S		PYDM-14SR	Red
			PYDM-14SB	Blue
14.3 mm	P2RF-□□-S		P2RM-SR	Red
			P2RM-SB	Blue

Note: 1. Use the Socket Bridges for relay coil bridge wiring.
 2. Specify the number of bags when ordering.

Safety Precautions

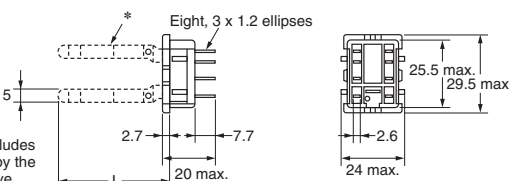

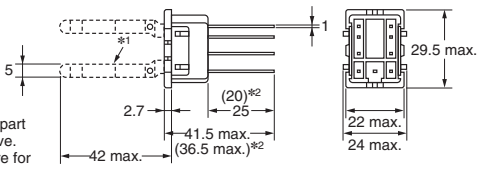


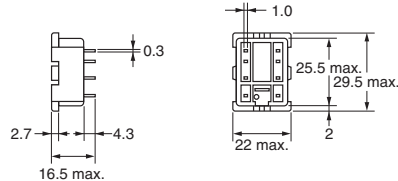

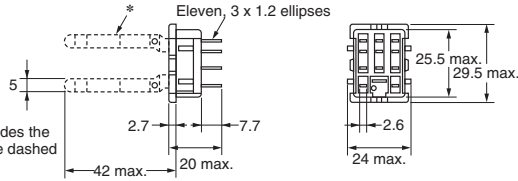

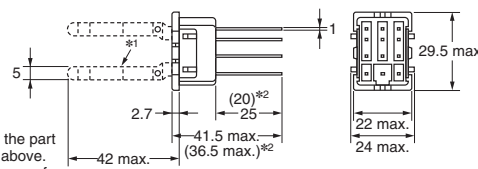

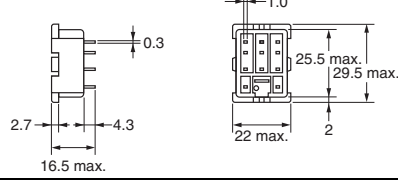

Maximum Carry Current

- The total current of all bridged poles must not exceed the maximum carry current of the Socket Bridge.
- Make sure that the maximum carry current of the relay contacts is also not exceeded for each pole.
- If you use more than one Socket, use End Plates (PFP-M).

Products Related to Common Sockets and DIN Tracks

PY

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions
PY08 PY08-Y1 (L = 42 max.) PY08-Y13 (L = 60 max.)  *The PY08-Y□ includes the part outlined by the dashed lines above.		
PY08QN PY08QN2 PY08QN-Y1 PY08QN2-Y1  *1. The PY08QN(2)-Y1 includes the part outlined by the dashed lines above. *2. The figures in the parentheses are for the PY08QN2(-Y1).	 (Bottom View)	
PY08-02 * The structure does not resist flux. Manual soldering is recommended for this product. 		
PY11 PY11-Y1  *The PY11-Y1 includes the part outlined by the dashed lines above.		
PY11QN PY11QN2 PY11QN-Y1 PY11QN2-Y1  *1. The PY11QN(2)-Y1 includes the part outlined by the dashed lines above. *2. The figures in the parentheses are for the PY11QN2(-Y1).	 (Bottom View)	
PY11-02 * The structure does not resist flux. Manual soldering is recommended for this product. 		

Products Related to Common Sockets and DIN Tracks

Dimensions	Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions
PY14 PY14-Y1 (L = 42 max.) PY14-Y3 (L = 60 max.) 		
PY14QN PY14QN2 PY14QN-Y1 (L = 42 max.) PY14QN2-Y1 (L = 42 max.) PY14QN-Y3 (L = 60 max.) PY14QN2-Y3 (L = 60 max.) 	 (Bottom View)	
PY14-02 * The structure does not resist flux. Manual soldering is recommended for this product. 		

- Note:** 1. Use a panel with a thickness of 1 to 2 mm when mounting a Socket on it.
 2. You can use the PY14-Y1 or PY14QN-Y1 for the MY4 Series, MY4H, MYQ4(Z), or MY2K.
 3. You can use the PY14-Y3 or PY14QN-Y3 for H3Y Timers.

PTF

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
PTF08A 		
PTF08A-E (Finger Protection Structure) 	 (Top View)	 (Top View) Note: Track mounting is also possible. Refer to page 27.

Products Related to Common Sockets and DIN Tracks

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
PTF11A 	 (Top View)	 (Top View) Note: Track mounting is also possible. Refer to page 27.
PTF14A 	 (Top View)	 (Top View) Note: Track mounting is also possible. Refer to page 27.
PTF14A-E (Finger Protection Structure) 	 (Top View)	 (Top View) Note: Track mounting is also possible. Refer to page 27.

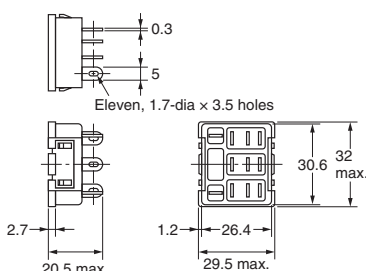
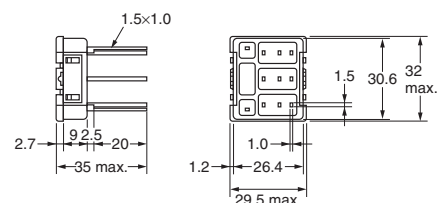


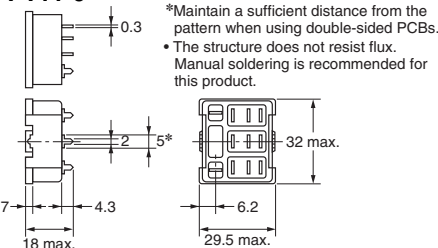


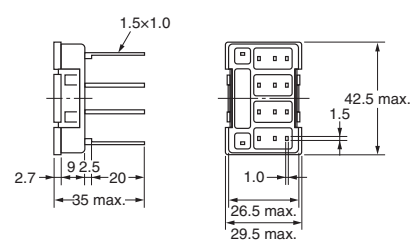


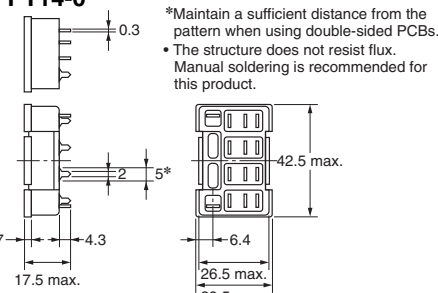

Note: If you use the PTF08A, PTF08A-E, or PT08 with an LY1 Relay, connect the following terminal pairs: 1-2, 3-4, and 5-6 (for usage at 10 A or higher).

PT

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions
PT08 	 (Bottom View)	
PT08QN 		
PT08-0 *Maintain a sufficient distance from the pattern when using double-sided PCBs. • The structure does not resist flux. Manual soldering is recommended for this product.		Eight, 2.5-dia. holes (±0.1 tolerance)

Products Related to Common Sockets and DIN Tracks

Dimensions		Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions
PT11 	PT11QN 	 (Bottom View)	
	PT11-0  *Maintain a sufficient distance from the pattern when using double-sided PCBs. • The structure does not resist flux. Manual soldering is recommended for this product.		 (±0.1 tolerance)
PT14 	PT14QN 	 (Bottom View)	
	PT14-0  *Maintain a sufficient distance from the pattern when using double-sided PCBs. • The structure does not resist flux. Manual soldering is recommended for this product.		 (±0.1 tolerance)

Note: Use a panel with a thickness of 1 to 2 mm when mounting a Socket on it.

Products Related to Common Sockets and DIN Tracks

P7LF

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P7LF-06 Two, M3.5 x 6 (coil side) Four, M4 x 8 (contact side) 40±0.1 55.5 max. 51.5 max. 25 46 max. 5 8±0.05 9.2±0.05	(Top View)	Two, 4.5 dia. or M4 mounting holes 40±0.1

P7S

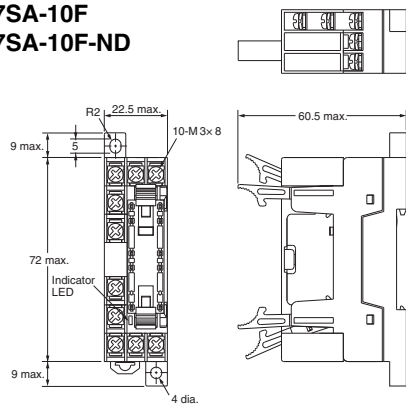



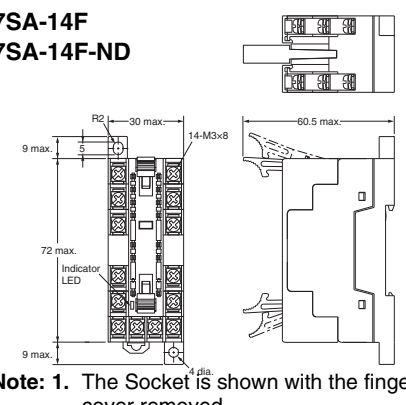




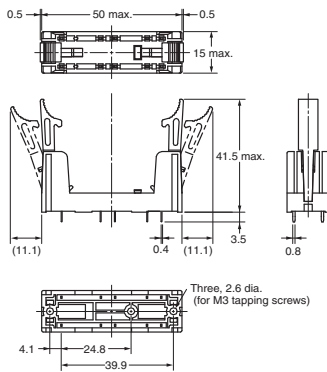


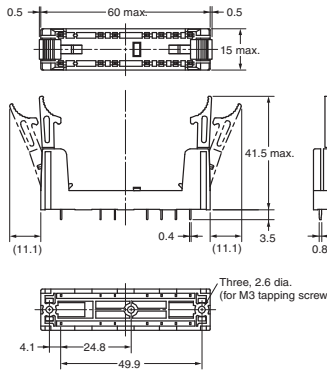



(Unit: mm)

Dimensions	Terminal Arrangement/Internal Connections	Mounting Hole Dimensions
P7S-14F-END Indicator LED 14-M3.0x8 40 max. 33±0.1 4 7.5 80 max. 37 17 5.9 3.1 5 90.5 max. (5)		Two, 4.0 dia. or M3.5 33±0.1
P7S-14P-E 70.5 max. 28±0.2 23.5 max. Two, 6.5 dia., depth: 8 57 max. 13.2 4.1 8 14.5 23.5 max. 6 5x7=35 16.9 (15)	G7S-4A2B-E Mounted G7S-3A3B-E Mounted	28±0.2 4.2 (21) (16.9) 2.8 14.5 8 16 7 Two, 3.6 dia. Fourteen, 2.5 dia. 5x7=35

Products Related to Common Sockets and DIN Tracks

P7SA

(Unit: mm)

Dimensions	Terminal Arrangement/Internal Connections	Mounting Hole Dimensions
P7SA-10F P7SA-10F-ND  Note: 1. The Socket is shown with the finger cover removed. 2. Only the -ND Sockets have LED indicators (orange).	G7SA-3A1B Mounted  G7SA-2A2B Mounted  * This display circuit is available only for "-ND" models. Note: Terminals 23-24, 33-34, and 43-44 are normally open. Terminals 11-12 and 21-22 are normally closed.	 (Top View)
P7SA-14F P7SA-14F-ND  Note: 1. The Socket is shown with the finger cover removed. 2. Only the -ND Sockets have LED indicators (orange).	G7SA-5A1B Mounted  G7SA-4A2B Mounted  G7SA-3A3B Mounted  * This display circuit is available only for "-ND" models. Note: Terminals 23-24, 33-34, 43-44, 53-54, and 63-64 are normally open. Terminals 11-12, 21-22, and 31-32 are normally closed.	 (Top View)
P7SA-10P  Three, 2.6 dia. (for M3 tapping screws)	G7SA-3A1B Mounted  G7SA-2A2B Mounted  (Bottom View) Note: Terminals 23-24, 33-34, and 43-44 are normally open. Terminals 11-12 and 21-22 are normally closed.	 (Bottom View) (±0.1 tolerance)
P7SA-14P  Three, 2.6 dia. (for M3 tapping screws)	G7SA-5A1B Mounted  G7SA-4A2B Mounted  G7SA-3A3B Mounted  (Bottom View) Note: Terminals 23-24, 33-34, 43-44, 53-54, and 63-64 are normally open. Terminals 11-12, 21-22, and 31-32 are normally closed.	 (Bottom View) (±0.1 tolerance)

Products Related to Common Sockets and DIN Tracks

PF

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
PF083A 	(Top View)	
PF083A-E 	(Top View)	Two M4 or 4.5-dia. holes 33±0.2 Note: Track mounting is also possible. Refer to page 27.
PF085A 	(Top View)	
PF113A 	(Top View)	Two M4 or 4.5-dia. holes 34±0.2 Note: Track mounting is also possible. Refer to page 27.
PF113A-E 	(Top View)	Two M4 or 4.5-dia. holes 34±0.2 Note: Track mounting is also possible. Refer to page 27.

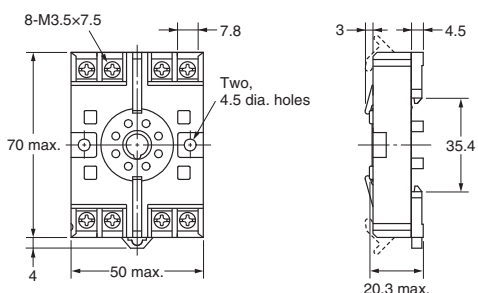


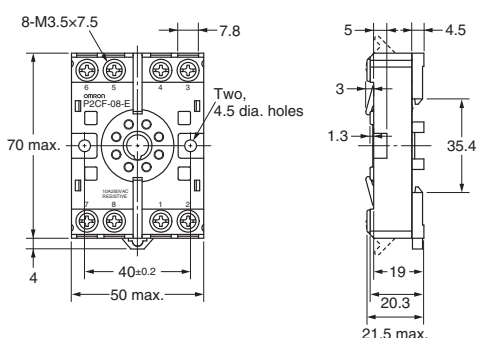
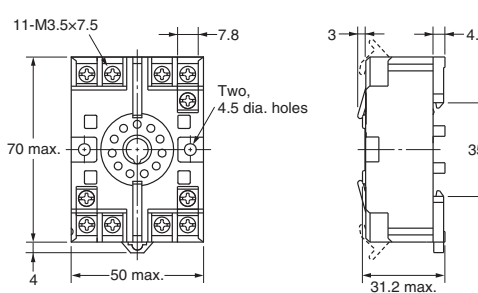


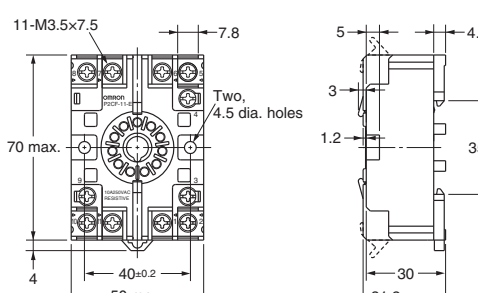
Note: 1. For the PF083A and PF113A, the Socket key slot is on the top. (Applicable model: MK)

2. The structure of □-E models provides finger protection. Round terminals cannot be used. Use forked crimp terminals.

Products Related to Common Sockets and DIN Tracks

P2CF

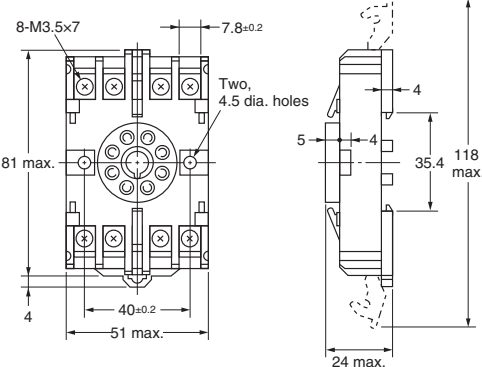


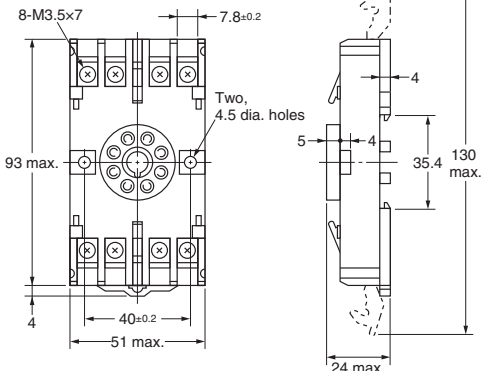


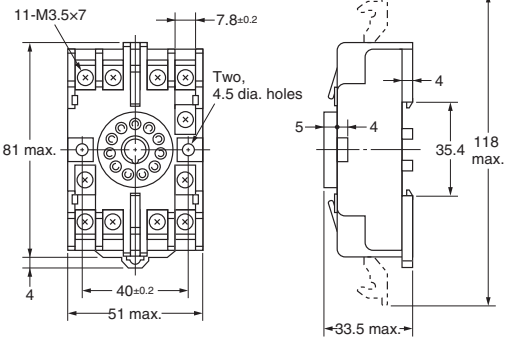


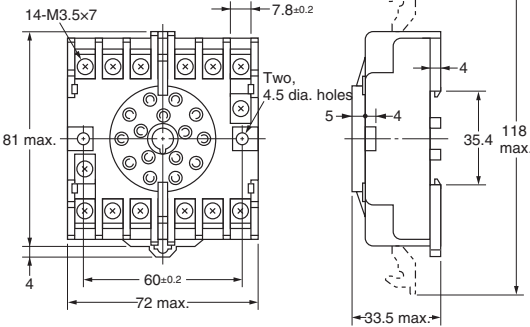


(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P2CF-08	 (Top View)	 Note: Track mounting is also possible. Refer to page 27.
P2CF-08-E		
P2CF-11	 (Top View)	 Note: Track mounting is also possible. Refer to page 27.
P2CF-11-E		

Products Related to Common Sockets and DIN Tracks

PFA

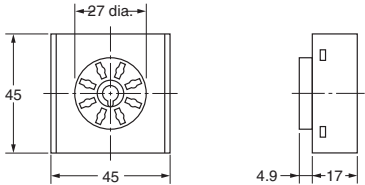

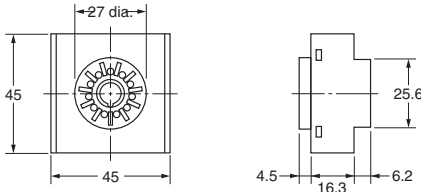

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
8PFA 	 (Top View)	 Note: Track mounting is also possible. Refer to page 27.
8PFA1 	 (Top View)	 Note: Track mounting is also possible. Refer to page 27.
11PFA 	 (Top View)	 Note: Track mounting is also possible. Refer to page 27.
14PFA 	 (Top View)	 Note: Track mounting is also possible. Refer to page 27.

Products Related to Common Sockets and DIN Tracks


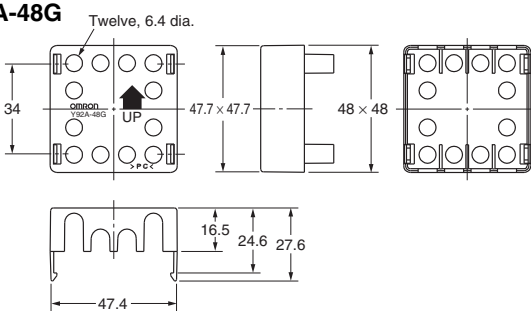
P3G/P3GA

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting Hole Dimensions
P3G-08  Eight, M3.5 SEMS screws Note: The Y92A-48G Terminal Cover can be used to implement finger protection.	 (Bottom View)	---
P3GA-11  Eleven, M3.5 SEMS screws Note: The Y92A-48G Terminal Cover can be used to implement finger protection.	 (Bottom View)	---







Terminal Cover

(Unit: mm)

Appearance	Dimensions
	Y92A-48G Twelve, 6.4 dia. 

Release Lever

(Unit: mm)

Applicable models	Appearance	Dimensions	Model
PYF08S			PYCM-08S
PYF14S			PYCM-14S
P2RF-05-S			P2CM-S
P2RF-08-S			

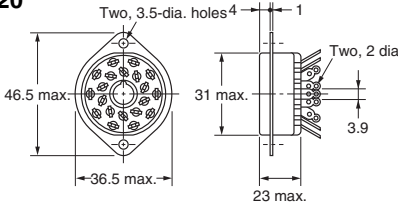


Products Related to Common Sockets and DIN Tracks

PL

(Unit: mm)

Dimensions	Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions (bottom view)
PL08 		Two, 3.5 dia. or M3 device mounting holes Two, 3.5 or M3 Socket mounting holes 31-dia. hole 40±0.3 L = 40 mm MK2(Z)P L = 74 mm PU, AMD-S, MM2(X)P, CZ, STP, H3L, TDS, DTS, DSP, TDF, TDV L = 86 mm 61F-GP/-APN, G4Q-212S, RD2P, RDA, TDA, AGF, SE, SAD, K2CU, SDV-F
PL08-Q 	 (Bottom View)	Two 3.5-dia. or two M3 Socket mounting holes 31-dia. hole 40±0.3 MK2(Z)P
PLE08-0 		Two 3.5-dia. Hold-down Clip mounting holes 45° 40±0.1 27.7±0.5 dia. Eight, 2.5-dia. holes MK2(Z)P
PL11 		Two, 3.5 dia. or M3 device mounting /Hold-down Clip mounting holes Two, 3.5 dia. or M3 Socket mounting holes 31-dia. hole 40±0.3 L = 40 mm MK3P MK2KP L = 74 mm MM3P MK2(X)KP
PL11-Q 	 (Bottom View)	L = 42 mm MK3ZP MK3LP
PLE11-0 		Two, 3.5-dia. holes Applicable model/Hold-down Clip mounting holes 360° 28.7±0.5 Eleven, 2.5-dia. holes L = 40 mm MK3P MK2KP L = 42 mm MK3ZP MK3LP
PL15 	 (Bottom View)	Two, 3.5 dia. or M3 device mounting holes Two, 3.5 dia. or M3 Socket mounting holes 4.2-dia. hole 74 53 MM3XP MM4(X)P MM3(X)KP MM4(X)KP

Products Related to Common Sockets and DIN Tracks

Dimensions	Terminal Arrangement/ Internal Connections	Mounting hole and PCB dimensions (bottom view)
PL20 	 (Bottom View)	 Two, 4.5-dia. Relay mounting holes Two, 4-dia. Socket mounting holes 33-dia. hole 56±0.2 38±0.2

* Relay mounting holes are not required for the LDNP.

Note: When mounting, pay due attention to the direction of the key groove of applicable Relays.

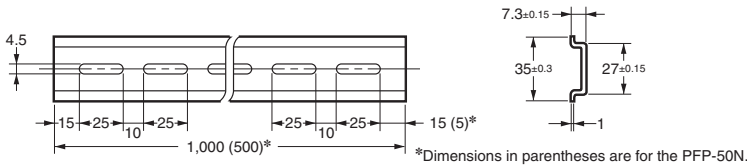

Accessories for DIN Track Mounting (Order Separately)

(Unit: mm)

DIN Tracks

PFP-100N

PFP-50N



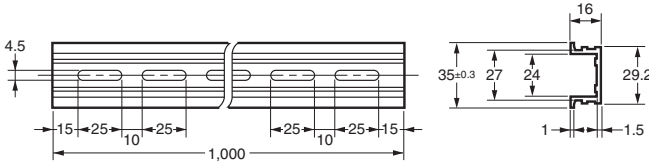

Model

PFP-100N

PFP-50N

DIN Track

PFP-100N2

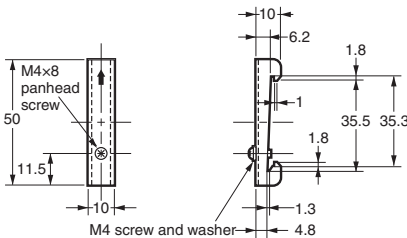


Model

PFP-100N2

End Plate

PFP-M





Model

PFP-M

Spacer

PFP-S



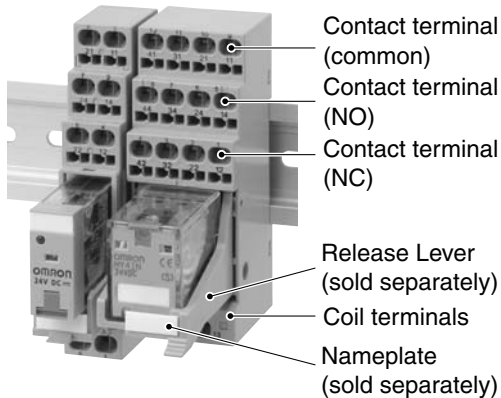
Model

PFP-S

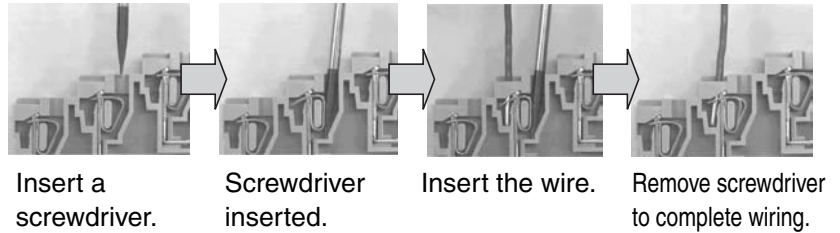
Note: 1. Order the above products in multiples of 10.
2. The Tracks conform to DIN standards.

Features of Screwless Sockets

Structured for Easy Wiring



Complete Wiring in Three Steps



- A spring holds the wire in place to reduce wiring work by 30% (according to OMRON comparison) and eliminates the need to manage torque.
- DIN terminal numbers also indicated.

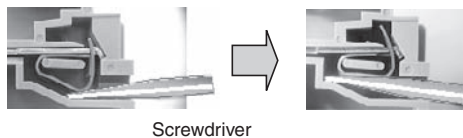
Safety Precautions

Precautions for Safe Use


- Do not move the screwdriver up, down, or from side to side or rotate it while it is inserted in the hole. Doing so may damage internal components in the Socket.




- Do not insert more than one wire into the same hole. Doing so may cause abnormal heating.
- There are two internally connected wiring holes for each terminal.
- Insert the screwdriver along the hole wall as shown below.



- When you remove a Socket from a support rail, insert the end of a screwdriver into the fixture and move the driver as shown by the arrow in the following figure.



- When you use a Release Lever to remove a Relay from a P2RF-□□-S Socket, insert a screwdriver at the location shown in the following figure and move the Release Lever in the direction indicated by the arrow to release the lock on the release lever.





Precautions for Correct Use

Wiring Tools

Applicable Screwdriver

Use a flat-blade screwdriver with a tip that is 2.5 mm wide (3.0 mm max.).



You cannot use a screwdriver with a thick shaft.

Applicable Screwdriver (Example)

VESSEL No.9900 – (–) 2.5 × 75

Applicable Wires

- You can use either solid wires or stranded wires. Applicable wire size: 0.2 to 1.5 mm² (AWG24 to AWG16)
- Strip 8 to 9 mm of insulation from the ends of the wires.

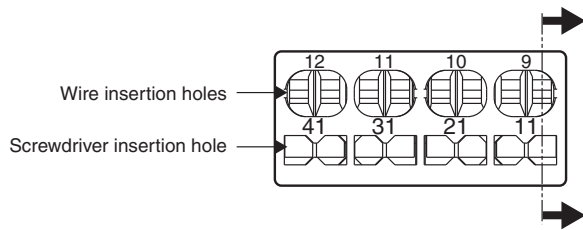


- If you insert stranded wires without ferrules, make sure that the wires are twisted when you insert them.
- If you use bare ferrules, always attach insulating sleeves.
- If you insert a wire with a sheath outer diameter of 2.2 mm or less, do not insert the wire far enough so that the sheath is engaged inside the hole, as shown below.

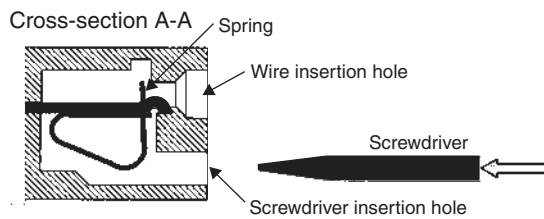


- Two wires with a sheath outer diameter of 3.2 mm or larger cannot be inserted for the same terminal at the same time.
- Use heat-shrinking tubes to indicate wire numbers.


Wiring



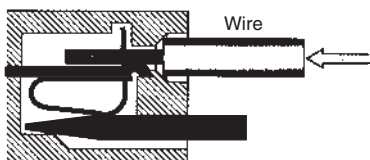
(1) Insert a screwdriver into a screwdriver insertion hole on the Socket.



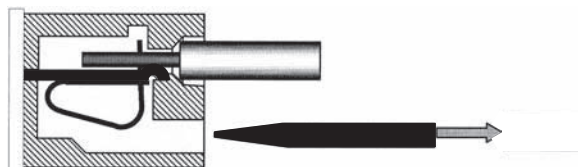
(2) Press the screwdriver in until it reaches the stopper inside the Socket. The spring at the back of the wire insertion hole will be complete open in this condition. The screwdriver will be held in place even if you remove your hand.



(3) With the screwdriver held in place, insert the wire or ferrule into the wire insertion hole.



(4) Remove the screwdriver. The spring will hold the wire. This concludes the connection procedure.



Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.