


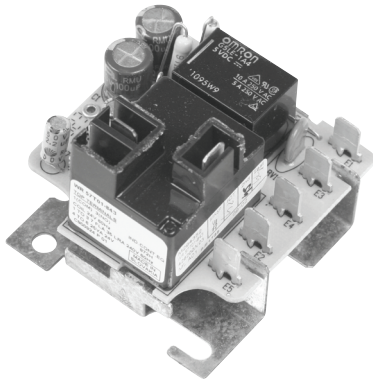

57T01-843

57T01-843 BLOWER TIME DELAY RELAY

The 57T01-843 Time Delay Relay is for use in air handlers installed in compressor-run air conditioning and heat pump systems to delay the blower shut-off after the compressor has shut off. Replaces Trane part numbers D155079P01 and RLY 2807.

FEATURES

- Allows residual cooled air to be blown into the controlled space, increasing the efficiency of the system in cooling.
- Depending on electrical hookup in a heat pump system, delay of blower shut-off could also occur in heating.

SPECIFICATIONS

Electrical Ratings:

Model Number	Contact Ratings: Power Pole (Amperes per pole)-	
		208/240/277 VAC
57T01-843	Full Load	7
	Locked Rotor	36
	Resistive	15
	U.L. Approved Horsepower	$\frac{3}{4}$ HP

Pilot Duty Pole 3 VA at 24 VAC (Minimum)
 25 V at 24 VAC (Maximum)
 Input Voltage. 24 VAC nominal
 Total Power Consumption. 0.5 VA (relay de-energized)
 4.0 VA (relay energized)