


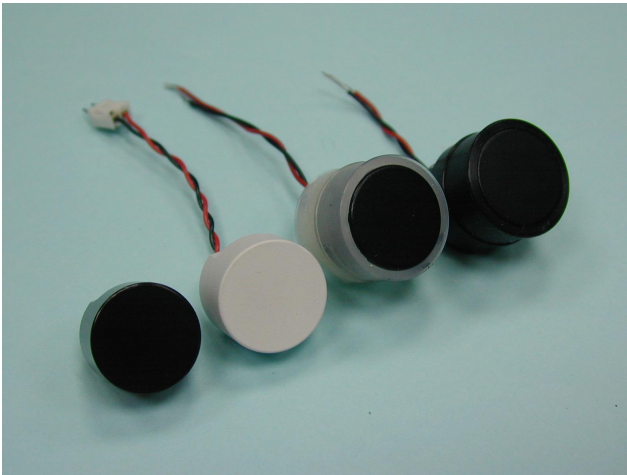

Asymmetric Beam Patterns Specification

400EP14D	Transceiver
Center Frequency	40.0±1.0KHz
Bandwidth (-6dB FOM)	1.0KHz
Transmitting Sound Pressure Level	103dB min.
at resonant frequency;0dB re 0.0002μbar per 10Vrms at 30cm	(Transducer alone)
Receiving Sensitivity	-78dB min.
at resonant frequency 0dB = 1 volt/μbar	(Transducer alone)
Nominal Impedance (Ohm)	1000
Ring (ms)	1.2 max.
Capacitance at 1KHz ±20%	1600 pF
Temperature Compensated Type	3200 pF
Max. Driving Voltage (cont.)	20Vrms
20 bursts, 25ms repetition rate	100Vpp
Total Beam Angle -6dB	135° typ.
	Wide
	Narrow
Operation Temperature	-30 to 70°C
Storage Temperature	-40 to 80°C


All specification taken typical at 25°C

Both lead pins and lead wires output are available

Models available:


1	400EP14D	Black Painted Housing
2	400EP14DC	Temperature compensated (TC)
3	400EP14DCR	T.C. + Rubber Sleeve

Dimensions: dimensions are in mm

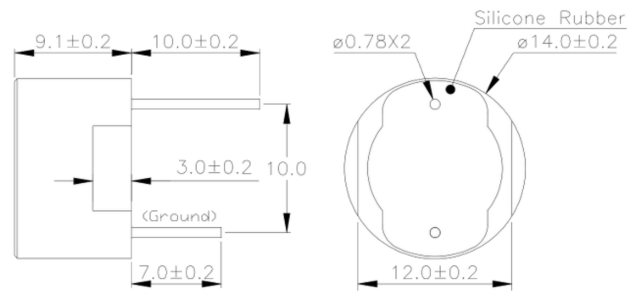


Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

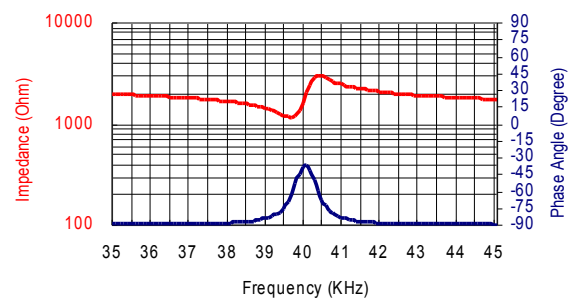


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

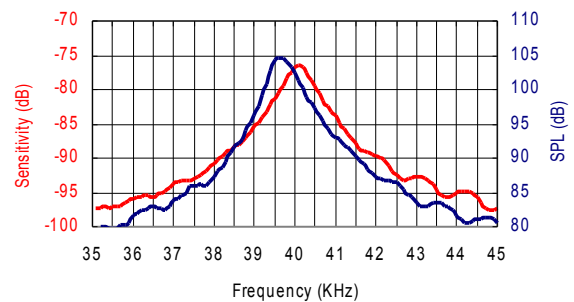

Beam Angle: Tested at 40.0Khz frequency

Wide Angle _____ Narrow Angle _____

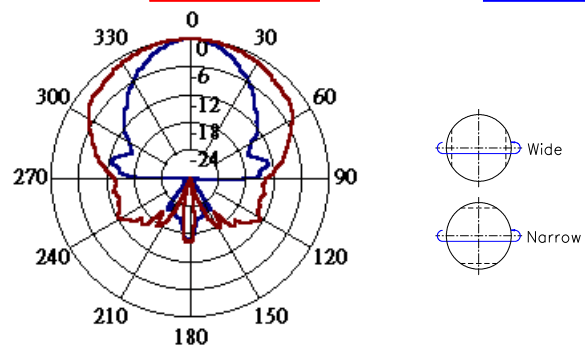

S. Square Enterprise Company Limited
Pro-Wave Electronics Corporation

[Http://www.pro-wave.com.tw](http://www.pro-wave.com.tw) ; E-mail: sales@pro-wave.com.tw ; Tel: 886-2-22465101 ; Fax: 886-2-22465105