


Pluggable terminal strips for printed circuits



Color: black - 5mm / light grey - 5.08mm
rated cross section 2.5 mm²

solid/fine stranded
rated voltage 250V~, 300V ~
(VDE 0110 Gr. C)

UL ratings: AWG No 22-12 300V 15 A
CSA ratings: AWG No 22-12 300 V 15 A

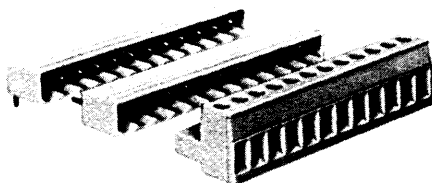

MATERIALS:

Insulating housing: polyamide, flame resistant
UL 94 V-0 continuous
temp. 100°C

Clamping body and
clamping screws: copper alloy, nickel plated
Solder pins and
contact springs: tin plated bronze

All metal parts are either recessed or enclosed
in the insulating body, providing circuit protec-
tion and dead-front safety. The terminal block
connectors are provided with captive wire pro-
tection, and the terminal screws are captive
and secured against loosening.


spacing 5 mm: standard color: black.

spacing 5.08 mm: standard color: light grey

Type 8113 B../ Type 8213 B../

spacing 5mm / 5.08 mm

Plug connector

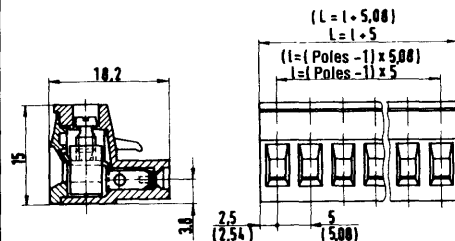

screw connection
wire strip length 6 mm

8113 B../ poles	part no	part no	spacing 5 mm
	marked	unmarked	
2	25.320.0253.1	25.320.3253.1	5
3	25.320.0353.1	25.320.3353.1	10
4	25.320.0453.1	25.320.3453.1	15
5	25.320.0553.1	25.320.3553.1	20
6	25.320.0653.1	25.320.3653.1	25
7	25.320.0753.1	25.320.3753.1	30
8	25.320.0853.1	25.320.3853.1	35
9	25.320.0953.1	25.320.3953.1	40
10	25.320.1053.1	25.320.4053.1	45
11	25.320.1153.1	25.320.4153.1	50
12	25.320.1253.1	25.320.4253.1	55
13	25.320.1353.1	25.320.4353.1	60
14	25.320.1453.1	25.320.4453.1	65
15	25.320.1553.1	25.320.4553.1	70
16	25.320.1653.1	25.320.4653.1	75
17	25.320.1753.1	25.320.4753.1	80
18	25.320.1853.1	25.320.4853.1	85
19	25.320.1953.1	25.320.4953.1	90
20	25.320.2053.1	25.320.5053.1	95
21	25.320.2153.1	25.320.5153.1	100
22	25.320.2253.1	25.320.5253.1	105
23	25.320.2353.1	25.320.5353.1	110
24	25.320.2453.1	25.320.5453.1	115


8213 B../ poles	part no	part no	spacing 5.08 mm
	marked	unmarked	
2	25.340.0253.0	25.340.3253.0	5.08
3	25.340.0353.0	25.340.3353.0	10.16
4	25.340.0453.0	25.340.3453.0	15.24
5	25.340.0553.0	25.340.3553.0	20.32
6	25.340.0653.0	25.340.3653.0	25.40
7	25.340.0753.0	25.340.3753.0	30.48
8	25.340.0853.0	25.340.3853.0	35.56
9	25.340.0953.0	25.340.3953.0	40.64
10	25.340.1053.0	25.340.4053.0	45.72
11	25.340.1153.0	25.340.4153.0	50.80
12	25.340.1253.0	25.340.4253.0	55.88
13	25.340.1353.0	25.340.4353.0	60.96
14	25.340.1453.0	25.340.4453.0	66.04
15	25.340.1553.0	25.340.4553.0	71.12
16	25.340.1653.0	25.340.4653.0	76.20
17	25.340.1753.0	25.340.4753.0	81.28
18	25.340.1853.0	25.340.4853.0	86.36
19	25.340.1953.0	25.340.4953.0	91.44
20	25.340.2053.0	25.340.5053.0	96.52
21	25.340.2153.0	25.340.5153.0	101.60
22	25.340.2253.0	25.340.5253.0	106.60
23	25.340.2353.0	25.340.5353.0	111.76
24	25.340.2453.0	25.340.5453.0	116.84

Type 8113 S../W Type 8213 S../W

spacing 5mm / 5.08mm

Horizontal socket

Plug-in parallel to PC board

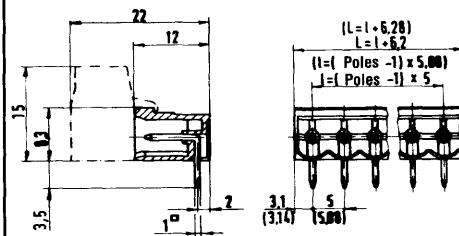

cross section 1 x 1
diameter of drilling hole 1.4 mm

8113 S../W poles	part no	spacing 5 mm
	unmarked	
2	25.332.3253.1	5
3	25.332.3353.1	10
4	25.332.3453.1	15
5	25.332.3553.1	20
6	25.332.3653.1	25
7	25.332.3753.1	30
8	25.332.3853.1	35
9	25.332.3953.1	40
10	25.332.4053.1	45
11	25.332.4153.1	50
12	25.332.4253.1	55
13	25.332.4353.1	60
14	25.332.4453.1	65
15	25.332.4553.1	70
16	25.332.4653.1	75
17	25.332.4753.1	80
18	25.332.4853.1	85
19	25.332.4953.1	90
20	25.332.5053.1	95
21	25.332.5153.1	100
22	25.332.5253.1	105
23	25.332.5353.1	110
24	25.332.5453.1	115

8213 S../W poles	part no	spacing 5.08 mm
	unmarked	
2	25.352.3253.0	5.08
3	25.352.3353.0	10.16
4	25.352.3453.0	15.24
5	25.352.3553.0	20.32
6	25.352.3653.0	25.40
7	25.352.3753.0	30.48
8	25.352.3853.0	35.56
9	25.352.3953.0	40.64
10	25.352.4053.0	45.72
11	25.352.4153.0	50.80
12	25.352.4253.0	55.88
13	25.352.4353.0	60.96
14	25.352.4453.0	66.04
15	25.352.4553.0	71.12
16	25.352.4653.0	76.20
17	25.352.4753.0	81.28
18	25.352.4853.0	86.36
19	25.352.4953.0	91.44
20	25.352.5053.0	96.52
21	25.352.5153.0	101.60
22	25.352.5253.0	106.60
23	25.352.5353.0	111.76
24	25.352.5453.0	116.84

Z5.523.2453.0

See page 145 for the use of fixing brackets,
end plates, and coding pieces.


Accessories

fixing brackets
complete end section

spacing 5/ 5.08 mm

Vertical socket

plug-in perpendicular to PC board

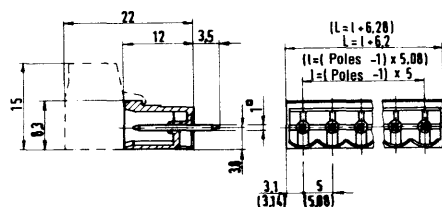

cross section 1 x 1
diameter of drilling hole 1.4 mm

8113 S/G		spacing 5 mm
poles	part no	l
	unmarked	
2	25.330.3253.1	5
3	25.330.3353.1	10
4	25.330.3453.1	15
5	25.330.3553.1	20
6	25.330.3653.1	25
7	25.330.3753.1	30
8	25.330.3853.1	35
9	25.330.3953.1	40
10	25.330.4053.1	45
11	25.330.4153.1	50
12	25.330.4253.1	55
13	25.330.4353.1	60
14	25.330.4453.1	65
15	25.330.4553.1	70
16	25.330.4653.1	75
17	25.330.4753.1	80
18	25.330.4853.1	85
19	25.330.4953.1	90
20	25.330.5053.1	95
21	25.330.5153.1	100
22	25.330.5253.1	105
23	25.330.5353.1	110
24	25.330.5453.1	115

8213 S/...G		specing 5.08 mm
poles	part no.	I
	unmarked	
2	25.350.3253.0	5.08
3	25.350.3353.0	10.16
4	25.350.3453.0	15.24
5	25.350.3553.0	20.32
6	25.350.3653.0	25.40
7	25.350.3753.0	30.48
8	25.350.3853.0	35.56
9	25.350.3953.0	40.64
10	25.350.4053.0	45.72
11	25.350.4153.0	50.80
12	25.350.4253.0	55.88
13	25.350.4353.0	60.96
14	25.350.4453.0	66.04
15	25.350.4553.0	71.12
16	25.350.4653.0	76.20
17	25.350.4753.0	81.28
18	25.350.4853.0	86.36
19	25.350.4953.0	91.44
20	25.350.5053.0	96.52
21	25.350.5153.0	101.60
22	25.350.5253.0	106.60
23	25.350.5353.0	111.76
24	25.350.5453.0	116.84


Z5.523.2453.0

Type 8113 SE/..W
Type 8213 SE/..W

spacing 5/ 5.08 mm

Two-tier horizontal socket


Plug-in parallel to PC board



cross section 1 x 1
diameter of drilling hole 1.4 mm

8113 SE..W		spacing 5 mm
poles	part no	
	unmarked	
2	25.336.3253.1	
3	25.336.3353.1	

Double level receptacles are modular and can be interlocked to form larger units

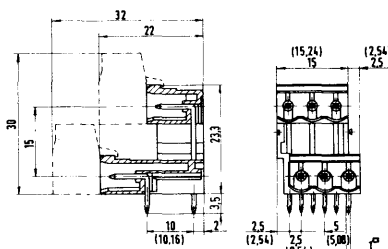

8213 SE..W	spacing 5.08 mm
poles	part no
	unmarked
2	25.356.3253.0
3	25.356.3353.0

Double level receptacles are modular and can be interlocked to form larger units.


Z5.523.2453.0
07.310.9853.0

Type 8113 SE/..G
Type 8213 SE/..G

spacing 5/ 5.08 mm

Two-tier vertical socket


Plug-in perpendicular to PC board



cross section 1 x 1
diameter of drilling hole 1.4 mm

8113 S/G		spacing 5 mm
poles	part no.	
	unmarked	
2	25.334.3253.1	
3	25.334.3353.1	

Double level receptacles are modular and can be interlocked to form larger units.

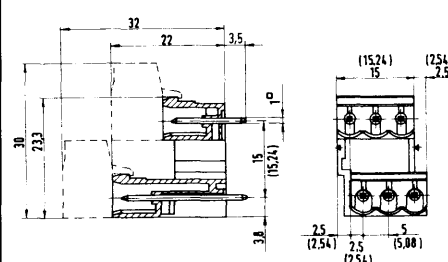

8213 S/-G	spacing 5.08 mm
poles	part no
	unmarked
2	25.354.3253.0
3	25.354.3353.0


Double level receptacles are modular and can be interlocked to form larger units.

Z5.523.2453.0
07.310.9853.0

Pluggable terminal strips for printed circuits

Color: light grey
 rated cross section 2.5 mm²
 solid/fine stranded
 rated voltage 380 V~, 450V =
 (VDE 0110 Gr. C)

UR ratings: AWG No 22-12 300V 15 A
 CSA ratings: AWG No 22-12 300 V 15 A

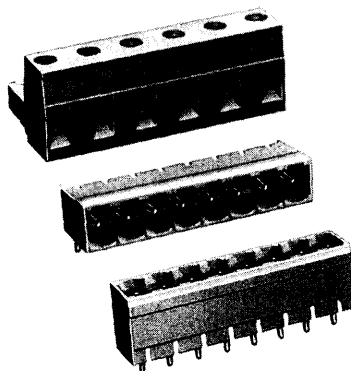

MATERIALS:


Insulating housing: polyamide, flame resistant
 UL 94 V-0 continuous temperature 100°C
 Clamping body and
 clamping screws: copper alloy nickel plated
 Solder pins and
 contact springs: tin plated bronze

All metal parts are either recessed or enclosed in the insulating body, providing circuit protection and dead-front safety. The terminal block connectors are provided with captive wire protection, and the terminal screws are captive and secured against loosening.

Type 8313 B/.. Type 8413 B/..

spacing 7.5/7.62 mm

Plug connector

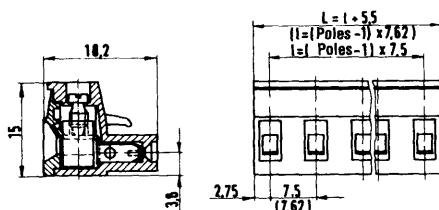

screw connection
 insul. strip length 6 mm

8313 B/..		spacing 7.5 mm	
poles	part no.	part no.	
	marked	unmarked	
2	25.360.0253.0	25.360.3253.0	7.5
3	25.360.0353.0	25.360.3353.0	15.0
4	25.360.0453.0	25.360.3453.0	22.5
5	25.360.0553.0	25.360.3553.0	30.0
6	25.360.0653.0	25.360.3653.0	37.5
7	25.360.0753.0	25.360.3753.0	45.0
8	25.360.0853.0	25.360.3853.0	52.5
9	25.360.0953.0	25.360.3953.0	60.0
10	25.360.1053.0	25.360.4053.0	67.5
11	25.360.1153.0	25.360.4153.0	75.0
12	25.360.1253.0	25.360.4253.0	82.5


8413 B/..		spacing 7.62 mm	
poles	part no.	part no.	
	marked	unmarked	
2	25.380.0253.0	25.380.3253.0	7.62
3	25.380.0353.0	25.380.3353.0	15.24
4	25.380.0453.0	25.380.3453.0	22.86
5	25.380.0553.0	25.380.3553.0	30.48
6	25.380.0653.0	25.380.3653.0	38.10
7	25.380.0753.0	25.380.3753.0	45.72
8	25.380.0853.0	25.380.3853.0	53.34
9	25.380.0953.0	25.380.3953.0	60.64
10	25.380.1053.0	25.380.4053.0	68.58
11	25.380.1153.0	25.380.4153.0	76.20
12	25.380.1253.0	25.380.4253.0	83.82

Type 8313 S/..W Type 8413 S/..W

spacing 7.5/7.62 mm

Horizontal socket

Plug-in parallel to PC board

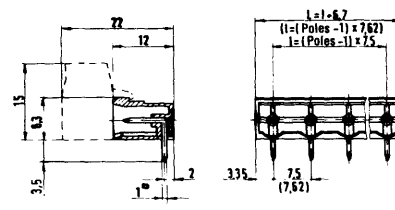

cross section 1 x 1
 diameter of drilling hole 1.4 mm

8313 S/..W		spacing 7.5 mm	
poles	part no.	part no.	
	unmarked		
2	25.372.3253.0		7.5
3	25.372.3353.0		15.0
4	25.372.3453.0		22.5
5	25.372.3553.0		30.0
6	25.372.3653.0		37.5
7	25.372.3753.0		45.0
8	25.372.3853.0		52.5
9	25.372.3953.0		60.0
10	25.372.4053.0		67.5
11	25.372.4153.0		75.0
12	25.372.4253.0		82.5

8413 S/..W		spacing 7.62 mm	
poles	part no.	part no.	
	unmarked		
2	25.392.3253.0		7.62
3	25.392.3353.0		15.24
4	25.392.3453.0		22.86
5	25.392.3553.0		30.48
6	25.392.3653.0		38.10
7	25.392.3753.0		45.72
8	25.392.3853.0		53.34
9	25.392.3953.0		60.64
10	25.392.4053.0		68.58
11	25.392.4153.0		76.20
12	25.392.4253.0		83.82

See page 145 for the use of fixing brackets, end plates, and coding pieces.

Accessories
 fixing bracket

25.523.2453.0


Type 8313 S/.G Type 8413 S/.G

spacing 7.5/ 7.62 mm

149

Vertical socket

plug-in perpendicular to PC board

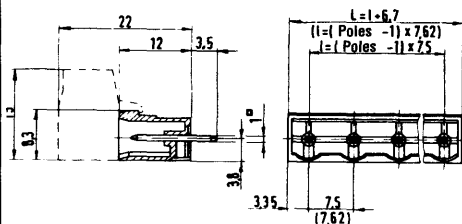

cross section 1 x 1

diameter of drilling hole 1.4 mm

8313 S/.G spacing 7.5 mm

poles	part no	
	unmarked	
2	25.370.3253.0	7.5
3	25.370.3353.0	15.0
4	25.370.3453.0	22.5
5	25.370.3553.0	30.0
6	25.370.3653.0	37.5
7	25.370.3753.0	45.0
8	25.370.3853.0	52.5
9	25.370.3953.0	60.0
10	25.370.4053.0	67.5
11	25.370.4153.0	75.0
12	25.370.4253.0	82.5

8413 S/.G spacing 7.62 mm


poles	part no	
	unmarked	
2	25.390.3253.0	7.5
3	25.390.3353.0	15.0
4	25.390.3453.0	22.5
5	25.390.3553.0	30.0
6	25.390.3653.0	37.5
7	25.390.3753.0	45.0
8	25.390.3853.0	52.5
9	25.390.3953.0	60.0
10	25.390.4053.0	67.5
11	25.390.4153.0	75.0
12	25.390.4253.0	82.5

Pluggable terminal strips for printed circuits 2.5 mm²

150

Color: black - 5mm / light grey - 5.08mm
 rated cross section 2.5 mm²
 solid/fine stranded
 rated voltage 250V~, 300 V
 (VDE 0110 Gr. C)

UL ratings: AWG No 22-12 300V 15 A
 CSA ratings: AWG No 22-12 300 V 15 A



MATERIALS:

Insulating housing: polyamide, flame resistant
 UL 94 V-0 continuous
 temp. 100°C

Clamping body and
 clamping screws: copper alloy, nickel plated
 Solder pins and
 contact springs: tin plated bronze

All metal parts are either recessed or enclosed
 in the insulating body, providing circuit protection
 and dead-front safety. The terminal block
 connectors are provided with captive wire protection,
 and the terminal screws are captive
 and secured against loosening.


spacing 5mm: standard color: black
 If in black, please order .1 instead of .0
 (e.g. 25.320.0233.1)

spacing 5.08mm: standard color: light grey

Type 8113 B/..TOP Type 8213 B/..TOP

spacing 5mm / 5.08mm

Top Plug connector

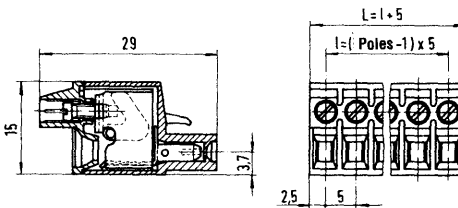

screw connection
 Wire strip length 10 mm

8113 B/..Top poles	part no.	part no.	spacing 5 mm
	marked	unmarked	
2	25.220.0253.1	25.220.3253.1	5
3	25.220.0353.1	25.220.3353.1	10
4	25.220.0453.1	25.220.3453.1	15
5	25.220.0553.1	25.220.3553.1	20
6	25.220.0653.1	25.220.3653.1	25
7	25.220.0753.1	25.220.3753.1	30
8	25.220.0853.1	25.220.3853.1	35
9	25.220.0953.1	25.220.3953.1	40
10	25.220.1053.1	25.220.4053.1	45
11	25.220.1153.1	25.220.4153.1	50
12	25.220.1253.1	25.220.4253.1	55
13	25.220.1353.1	25.220.4353.1	60
14	25.220.1453.1	25.220.4453.1	65
15	25.220.1553.1	25.220.4553.1	70
16	25.220.1653.1	25.220.4653.1	75
17	25.220.1753.1	25.220.4753.1	80
18	25.220.1853.1	25.220.4853.1	85
19	25.220.1953.1	25.220.4953.1	90
20	25.220.2053.1	25.220.5053.1	95
21	25.220.2153.1	25.220.5153.1	100
22	25.220.2253.1	25.220.5253.1	105
23	25.220.2353.1	25.220.5353.1	110
24	25.220.2453.1	25.220.5453.1	115


8213 B/..Top poles	part no.	part no.	spacing 5.08 mm
	marked	unmarked	
2	25.240.0253.0	25.240.3253.0	5.08
3	25.240.0353.0	25.240.3353.0	10.16
4	25.240.0453.0	25.240.3453.0	15.24
5	25.240.0553.0	25.240.3553.0	20.32
6	25.240.0653.0	25.240.3653.0	25.40
7	25.240.0753.0	25.240.3753.0	30.48
8	25.240.0853.0	25.240.3853.0	35.56
9	25.240.0953.0	25.240.3953.0	40.64
10	25.240.1053.0	25.240.4053.0	45.72
11	25.240.1153.0	25.240.4153.0	50.80
12	25.240.1253.0	25.240.4253.0	55.88
13	25.240.1353.0	25.240.4353.0	60.96
14	25.240.1453.0	25.240.4453.0	66.04
15	25.240.1553.0	25.240.4553.0	71.12
16	25.240.1653.0	25.240.4653.0	76.20
17	25.240.1753.0	25.240.4753.0	81.28
18	25.240.1853.0	25.240.4853.0	86.36
19	25.240.1953.0	25.240.4953.0	91.44
20	25.240.2053.0	25.240.5053.0	96.52
21	25.240.2153.0	25.240.5153.0	101.60
22	25.240.2253.0	25.240.5253.0	106.60
23	25.240.2353.0	25.240.5353.0	111.76
24	25.240.2453.0	25.240.5453.0	116.84

Type 8113 S/..W Type 8213 S/..W

spacing 5mm / 5.08mm

Horizontal socket

Plug-in parallel to PC board

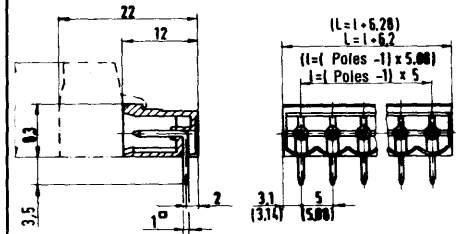

cross section 1 x 1
 diameter of drilling hole 1.4 mm

8113 S/..W poles	part no.	part no.	spacing 5 mm
	unmarked		
2	25.332.3253.1	5	
3	25.332.3353.1	10	
4	25.332.3453.1	15	
5	25.332.3553.1	20	
6	25.332.3653.1	25	
7	25.332.3753.1	30	
8	25.332.3853.1	35	
9	25.332.3953.1	40	
10	25.332.4053.1	45	
11	25.332.4153.1	50	
12	25.332.4253.1	55	
13	25.332.4353.1	60	
14	25.332.4453.1	65	
15	25.332.4553.1	70	
16	25.332.4653.1	75	
17	25.332.4753.1	80	
18	25.332.4853.1	85	
19	25.332.4953.1	90	
20	25.332.5053.1	95	
21	25.332.5153.1	100	
22	25.332.5253.1	105	
23	25.332.5353.1	110	
24	25.332.5453.1	115	

8213 S/..W poles	part no.	part no.	spacing 5.08 mm
	unmarked		
2	25.352.3253.0	5.08	
3	25.352.3353.0	10.16	
4	25.352.3453.0	15.24	
5	25.352.3553.0	20.32	
6	25.352.3653.0	25.40	
7	25.352.3753.0	30.48	
8	25.352.3853.0	35.56	
9	25.352.3953.0	40.64	
10	25.352.4053.0	45.72	
11	25.352.4153.0	50.80	
12	25.352.4253.0	55.88	
13	25.352.4353.0	60.96	
14	25.352.4453.0	66.04	
15	25.352.4553.0	71.12	
16	25.352.4653.0	76.20	
17	25.352.4753.0	81.28	
18	25.352.4853.0	86.36	
19	25.352.4953.0	91.44	
20	25.352.5053.0	96.52	
21	25.352.5153.0	101.60	
22	25.352.5253.0	106.60	
23	25.352.5353.0	111.76	
24	25.352.5453.0	116.84	

25.523.2453.0


See page 145 for the use of fixing brackets,
 end plates, and coding pieces.

Type 8113 S/..G Type 8213 S/..G

spacing 5/ 5.08 mm

Vertical socket

plug-in perpendicular to PC board

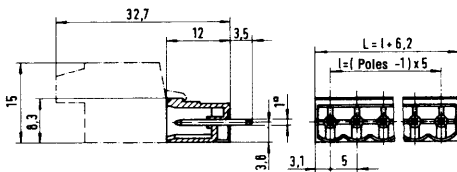

cross section 1 x 1
diameter of drilling hole 1.4 mm

8113 S/..G poles	part no	spacing 5 mm
	unmarked	
2	25.330.3253.1	5
3	25.330.3353.1	10
4	25.330.3453.1	15
5	25.330.3553.1	20
6	25.330.3653.1	25
7	25.330.3753.1	30
8	25.330.3853.1	35
9	25.330.3953.1	40
10	25.330.4053.1	45
11	25.330.4153.1	50
12	25.330.4253.1	55
13	25.330.4353.1	60
14	25.330.4453.1	65
15	25.330.4553.1	70
16	25.330.4653.1	75
17	25.330.4753.1	80
18	25.330.4853.1	85
19	25.330.4953.1	90
20	25.330.5053.1	95
21	25.330.5153.1	100
22	25.330.5253.1	105
23	25.330.5353.1	110
24	25.330.5453.1	115


8213 S/..G poles	part no	spacing 5.08 mm
	unmarked	
2	25.350.3253.0	5.08
3	25.350.3353.0	10.16
4	25.350.3453.0	15.24
5	25.350.3553.0	20.32
6	25.350.3653.0	25.40
7	25.350.3753.0	30.48
8	25.350.3853.0	35.56
9	25.350.3953.0	40.64
10	25.350.4053.0	45.72
11	25.350.4153.0	50.80
12	25.350.4253.0	55.88
13	25.350.4353.0	60.96
14	25.350.4453.0	66.04
15	25.350.4553.0	71.12
16	25.350.4653.0	76.20
17	25.350.4753.0	81.28
18	25.350.4853.0	86.36
19	25.350.4953.0	91.44
20	25.350.5053.0	96.52
21	25.350.5153.0	101.60
22	25.350.5253.0	106.60
23	25.350.5353.0	111.76
24	25.350.5453.0	116.84

Z5.523.2453.0

Pluggable terminal strips for printed circuits 2.5mm²

Color: black - 5mm / light grey - 5.08mm
rated cross section 2.5 mm

rated voltage 24
rated current 2.2 mA per display

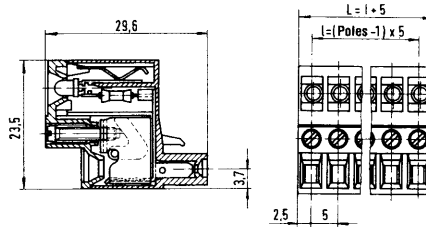

Description:

The 8113 "Top" plugs are designed with the clamping screw access parallel to the wire entry port. This is of special importance when used in restricted areas where a standard right angle configuration would be awkward or even impossible, such as stacked or panel mounted PC boards.

The 8113 TOP series features an insulating body of Polyamide 6.6; temperature range up to 100°C; a flammability rating of UL 94 V-O, fully backed out clamping screws of zinc plated and chromated steel and galvanic tin plated bronze contact springs and solder pins.

The LED version is used wherever visual indication of the circuit condition is required.


spacing 5mm: standard color: black

spacing 5.08mm: standard color: light grey

Type 8113 B/..TOP LED

spacing 5 / 5.08 mm

Top plug connector LED
with one negative pole

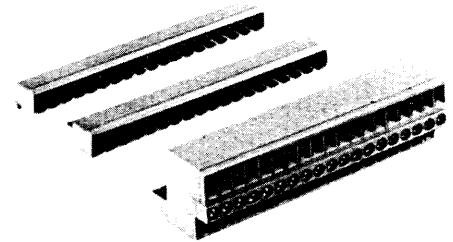

Wire strip length: 5.5 mm

8113 B/..Top LED		spacing 5 mm	
poles	part no		spacing
	marked	unmarked	
2	25.230.0253.1	25.230.3253.1	5
3	25.230.0353.1	25.230.3353.1	10
4	25.230.0453.1	25.230.3453.1	15
5	25.230.0553.1	25.230.3553.1	20
6	25.230.0653.1	25.230.3653.1	25
7	25.230.0753.1	25.230.3753.1	30
8	25.230.0853.1	25.230.3853.1	35
9	25.230.0953.1	25.230.3953.1	40
10	25.230.1053.1	25.230.4053.1	45
11	25.230.1153.1	25.230.4153.1	50
12	25.230.1253.1	25.230.4253.1	55
13	25.230.1353.1	25.230.4353.1	60
14	25.230.1453.1	25.230.4453.1	65
15	25.230.1553.1	25.230.4553.1	70
16	25.230.1653.1	25.230.4653.1	75
17	25.230.1753.1	25.230.4753.1	80
18	25.230.1853.1	25.230.4853.1	85
19	25.230.1953.1	25.230.4953.1	90
20	25.230.2053.1	25.230.5053.1	95
21	25.230.2153.1	25.230.5153.1	100
22	25.230.2253.1	25.230.5253.1	105
23	25.230.2353.1	25.230.5353.1	110
24	25.230.2453.1	25.230.5453.1	115