



## SOCKETS FOR C3 RELAYS

- Built in retaining clip
- Removable label marking facility
- Coding ring compatible
- One or two level terminals
- DIN rail, solder tag or PCB mount




### S3-B

One level.

Integrated clip and marking label

Accepts the exclusive Releco coding ring for coding both the relay and base. DIN rail or panel mountable. Removable label. EN/DIN and sequential numbering. According to EN60947

#### Wiring diagram

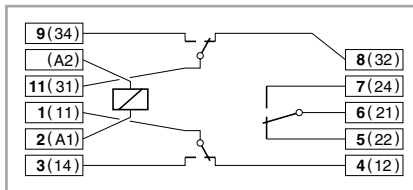

#### Specifications

Nominal load 10A/250V  
Dielectric strength (adjacent screws) 2,5 KV  
Dielectric strength (screws/rail) 2,5 KV  
Max. screw torque 1,2 Nm  
Screw dimensions M3, Pozi  
Wire in-lets capacity:  
Solid wire 4 mm<sup>2</sup> or 2 x 2,25 mm<sup>2</sup>  
Multi-core 22 - 14 AWG


### S3-S

Two level.

Integrated clip and marking label

Accepts the exclusive Releco coding ring for coding both the relay and base. DIN rail or panel mountable. Removable label. EN/DIN and sequential numbering. According to EN60947

#### Wiring diagram

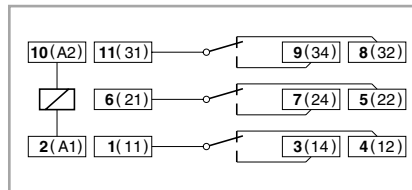

#### Specifications

Nominal load 10A/250V  
Dielectric strength (adjacent screws) 2,5 KV  
Dielectric strength (screws/rail) 2,5 KV  
Max. screw torque 1,2 Nm  
Screw dimensions M3, Pozi  
Wire in-lets capacity:  
Solid wire 4 mm<sup>2</sup> or 2 x 2,25 mm<sup>2</sup>  
Multi-core 22 - 14 AWG

### S3-L


### S3-PO

8 pin, solder and printed circuit tags

S3-L Flange panel mountable.


S3-PO Printed circuit tags with flange.

#### Printed circuit lay-out





#### Specifications



Nominal load 10 A/250 V  
Dielectric strength (adjacent pin) 2,5 KV  
Hard brass, tin-plated terminals



### S3-B

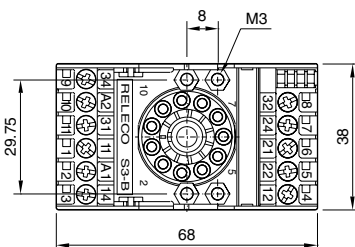
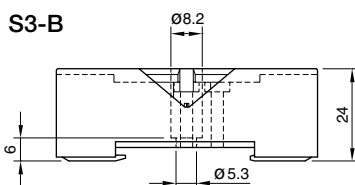


### S3-S

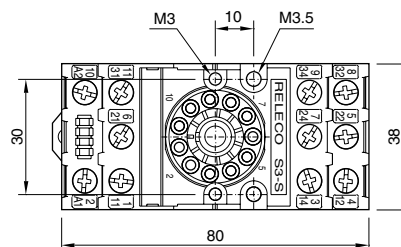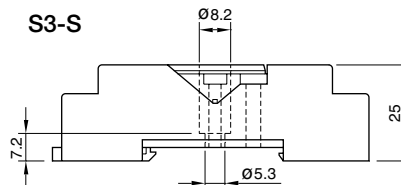

### S3-L

### S3-PO

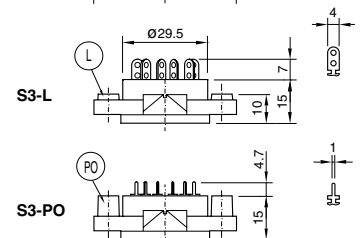

### S3-BC

Coding Ring

Can be used to code a specific relay to fit a specific socket up to 11 combinations. Supplied in a pack of 5 pieces.