

# Simple Fiber Amplifiers

E3X-SD/NA Series


OMRON

## Simplicity and High Performance

The Series now includes models with digital displays and direct key setting.

NEW

Digital Display – Direct Key Setting

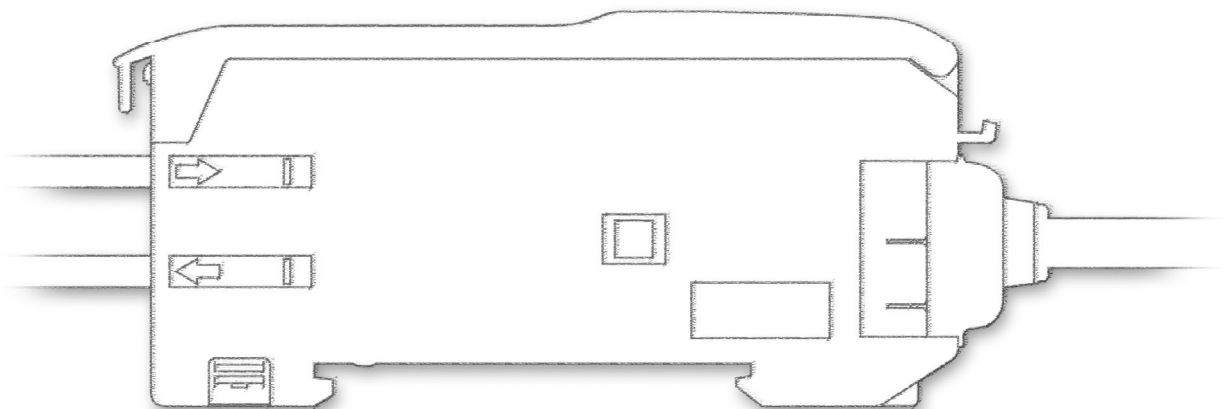

Bar Display – Manual Setting

# Simplicity and High Performance

# 1

## Operation and Displays So Simple That Anyone Can Use the Amplifier Right Away


A design that focuses on simple operation has resulted in an Amplifier that is so simple it can be operated without the manual.

The Amplifier also uses a large, easy-to-read operation indicator and a simple display for excess gain (i.e., incident level/operating level).

Essentially anyone can use the Amplifier right away. **No manual**

Setting is completed with a single press when teaching with/without the workpiece.

### No screwdriver



Fine adjustments can be made in increments of 1% using the Up and Down Keys.

E3X-SD

10 mm

Fine tuning can be performed using the 8-turn adjuster (with indicator).

E3X-NA

### Compact


Small body with width of 10 mm and simple operation.

**Compact size** with length of 65 mm.

### No modes

A timer function is provided as a standard feature.

**The switch is for the timer only**, so no complicated operation is required.

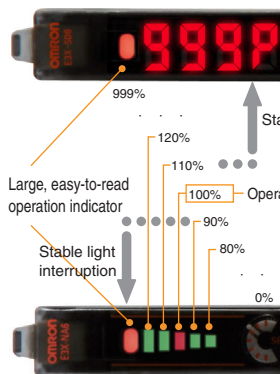

Largest display in the industry = **6 mm**

**Intuitive display for excess gain**  
(i.e., incident level/operating level)


Immediately determine operation and amount of light with a simple, bright display.

With the E3X-SD, settings and management can be performed reliably using the digital display ranging from 0% to 999% (10 times), and with the E3X-NA, the same can be performed intuitively using the large 5-level bar display.


# 2

## Wire-saving Connector to Reduce Work and Stock Management

Gang-mount up to 16 Amplifiers.

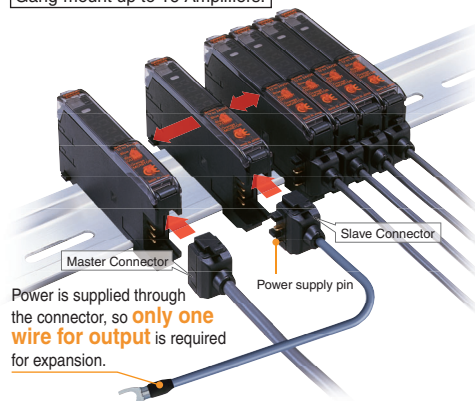

- Large reduction in wiring work
- Simple management:  
No distinction between master and slaves




Work efficiency is also improved during maintenance.

## 3

### General-purpose Performance for Simple Use

The three most important performance capabilities when selecting a sensor are achieved to a high standard: distance, speed, and precision.

A balance is provided between reliable detection performance and capability for a broad range of applications.

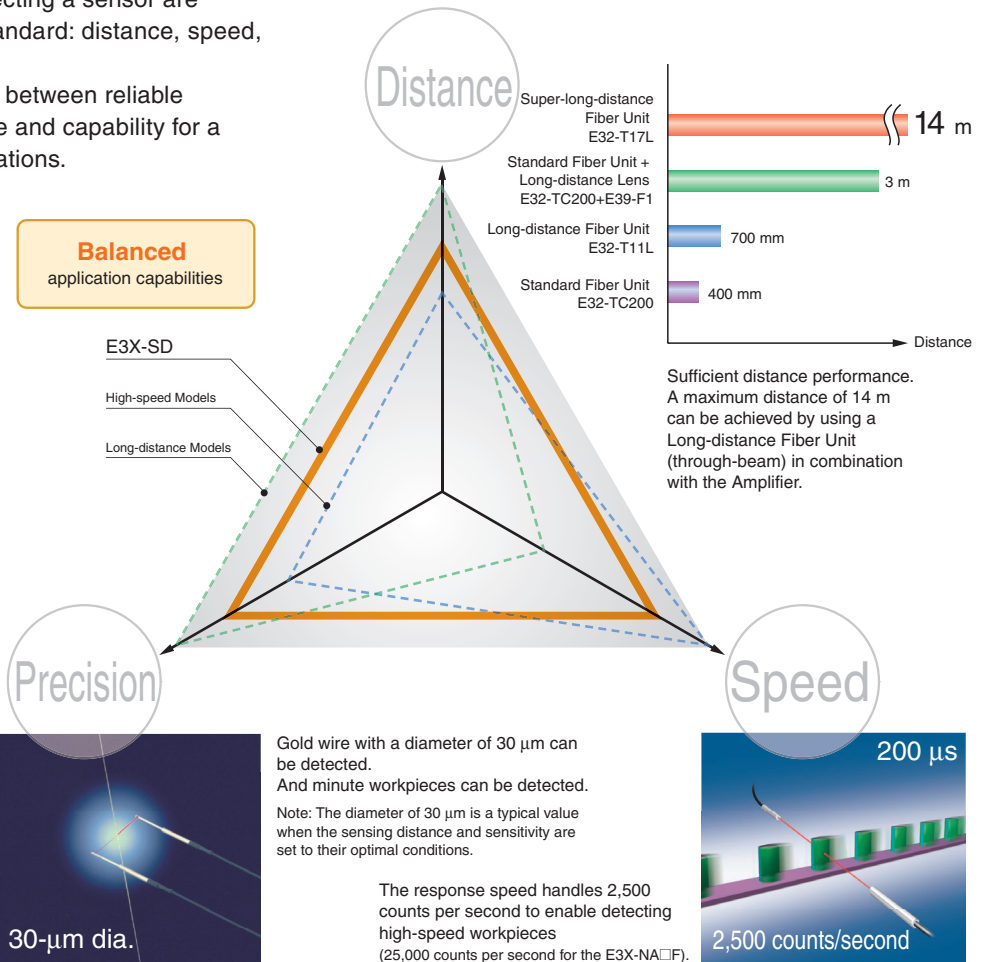


## 4

### Optical Communications to Prevent Mutual Interference for Up to Five Amplifiers

Optical communications is used between Amplifiers.

Interference is reliably prevented for up to five Amplifiers by mutually staggering the light emission timing (except for the E3X-NA□F).

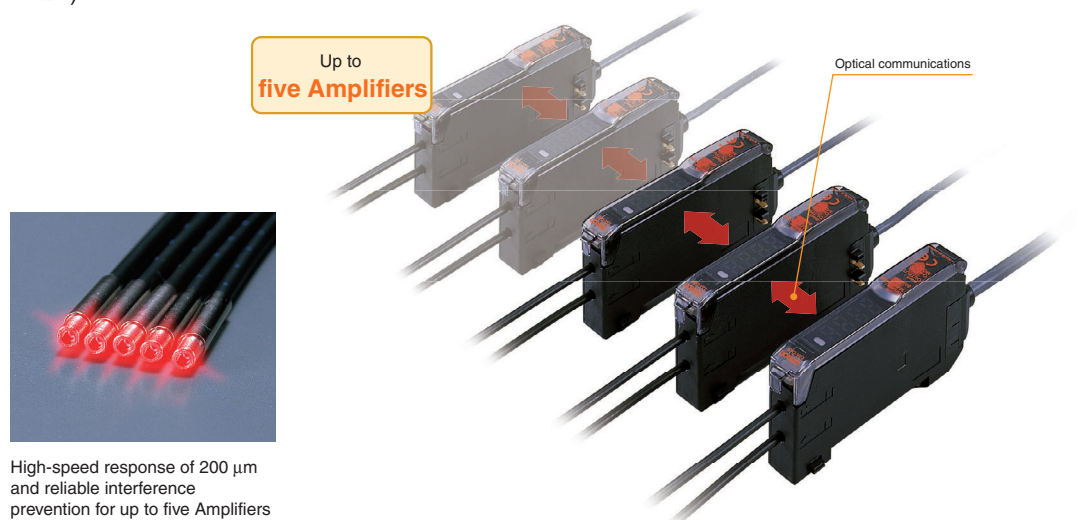

## Simple

For simple operation: Select a Simple Fiber Amplifier.

Standard Amplifiers

NEW

Reliable

Digital display and direct setting



E3X-SD□

Intuitive


Bar display and adjuster setting



E3X-NA□

Fastest in class

Super-high-speed Amplifiers (20 μs)



E3X-NA□F

Water-resistant Amplifiers (IP66)



E3X-NA□V

## All in One

For multifunctional capability: Select an Advanced Fiber Amplifier.

Standard Amplifiers



E3X-DA□-S

Standard models

E3X-DA□AN-S

Easy measurement control using analog output

Advanced Amplifiers



E3X-DA□TW-S

Range determination using twin outputs

E3X-DA□RM-S

Sensor control using external signal

E3X-DA□AT-S

**World's first** Reliable operation in dust using automatic threshold control.

Two-channel Amplifiers



E3X-MDA□

**New concept** Save space with two Amplifiers packed into a single case.

Color-sensing Amplifiers

NEW



E3X-DAC□-S

**World's first** Color sensing models with white LEDs  
Stable detection with resistance against workpiece movement.

# Simple Fiber Amplifier

## E3X-SD/-NA

### The Standard for Fiber Amplifiers with Simple Operation and High Performance

- Operation so simple that essentially anyone can use the amplifier right way.
- Immediately determine operation and amount of light with a simple, bright display.
- General-purpose capabilities to simply handle a broad range of applications.



### Ordering Information

#### Amplifier Units

##### Digital Display and Direct Key Setting

| Item            | Appearance | Connection method     | Ratings and Specifications | Model      |            |
|-----------------|------------|-----------------------|----------------------------|------------|------------|
|                 |            |                       |                            | NPN output | PNP output |
| Standard models |            | Pre-wired             | ---                        | E3X-SD11   | E3X-SD41   |
|                 |            | Wire-saving connector |                            | E3X-SD6    | E3X-SD8    |

##### Bar Display and Adjuster Setting



| Item                        | Appearance | Connection method     | Ratings and Specifications | Model      |            |
|-----------------------------|------------|-----------------------|----------------------------|------------|------------|
|                             |            |                       |                            | NPN output | PNP output |
| Standard models             |            | Pre-wired             | ---                        | E3X-NA11   | E3X-NA41   |
|                             |            | Wire-saving connector |                            | E3X-NA6    | E3X-NA8    |
| High-speed detection models |            | Pre-wired             | Response time: 20 $\mu$ s  | E3X-NA11F  | E3X-NA41F  |
| Water-resistant models      |            | Pre-wired             | Degree of protection: IP66 | E3X-NA11V  | E3X-NA41V  |
|                             |            | Connector (M8)        |                            | E3X-NA14V  | E3X-NA44V  |



# E3X-SD/-NA

## Amplifier Unit Connectors (Order Separately)

Note: Stickers for Connectors are included as accessories.

| Item             | Appearance                                                                        | Cable length | No. of conductors | Model    |
|------------------|-----------------------------------------------------------------------------------|--------------|-------------------|----------|
| Master Connector |  | 2 m          | 3                 | E3X-CN11 |
| Slave Connector  |  |              | 1                 | E3X-CN12 |

### Combining Amplifier Units and Connectors

(Basically, Amplifier Units and Connectors are sold separately)  
Refer to the following tables when placing an order.

| Amplifier Units |         |         |
|-----------------|---------|---------|
| Type            | NPN     | PNP     |
| Standard models | E3X-SD6 | E3X-SD8 |
|                 | E3X-NA6 | E3X-NA8 |

### When Using 5 Amplifier Units

|                   |
|-------------------|
| 5 Amplifier Units |
|-------------------|

### Applicable Connectors (Order Separately)

| Master Connector  | Slave Connector   |
|-------------------|-------------------|
| E3X-CN11 (3-wire) | E3X-CN12 (1-wire) |



|                                         |
|-----------------------------------------|
| 1 Master Connector + 4 Slave Connectors |
|-----------------------------------------|

## Sensor I/O Connectors (Order Separately)


| Size | Cable specifications | Appearance                                                                                            | Cable type | Model           |
|------|----------------------|-------------------------------------------------------------------------------------------------------|------------|-----------------|
| M8   | Standard cable       | Straight connector   | 2 m        | XS3F-M421-402-A |
|      |                      |                                                                                                       | 5 m        | XS3F-M421-405-A |
|      |                      | L-shaped connector  | 2 m        | XS3F-M422-402-A |
|      |                      |                                                                                                       | 5 m        | XS3F-M422-405-A |

## Accessories (Order Separately)

### Mounting Brackets

| Appearance                                                                          | Applicable models              | Model    | Quantity |
|-------------------------------------------------------------------------------------|--------------------------------|----------|----------|
|  | E3X-SD□<br>E3X-NA□<br>E3X-NA□F | E39-L143 | 1        |
|  | E3X-NA□V                       | E39-L148 |          |

### End Plate

| Appearance                                                                            | Model | Quantity |
|---------------------------------------------------------------------------------------|-------|----------|
|  | PFP-M | 1        |

## Ratings and Specifications

### Amplifier Units

| Type                           |       | Digital display and direct key setting                                                                                                                                                                                    | Bar display and adjuster setting |                                              |                                                 |
|--------------------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|----------------------------------------------|-------------------------------------------------|
|                                |       | Standard models                                                                                                                                                                                                           | Standard models                  | High-speed detection models                  | Water-resistant models                          |
| Item                           | Model | E3X-SD□                                                                                                                                                                                                                   | E3X-NA□                          | E3X-NA□F                                     | E3X-NA□V                                        |
| Light source (wavelength)      |       | Red LED (620 nm)                                                                                                                                                                                                          |                                  | Red LED (680 nm)                             |                                                 |
| Power supply voltage           |       | 12 to 24 VDC ±10%, ripple (p-p): 10% max.                                                                                                                                                                                 |                                  |                                              |                                                 |
| Current consumption            |       | 960 mW max. (Power supply: 24 V, Current consumption: 40 mA max.)                                                                                                                                                         |                                  | 35 mA max.                                   |                                                 |
| Control output                 |       | Open-collector output (NPN or PNP)<br>Load power supply: 26.4 V max., Load current: 50 mA max. (Residual voltage: 1.5 V max.) (*1)<br>Light-ON/Dark-ON mode selector                                                      |                                  |                                              |                                                 |
| Response time                  |       | Operate or reset: 200 μs max. (*2)                                                                                                                                                                                        |                                  |                                              | Operate: 20 μs max.<br>Reset: 30 μs max.        |
| Sensitivity adjustment         |       | UP/DOWN direct key setting, teaching                                                                                                                                                                                      |                                  | 8-turn sensitivity adjuster (with indicator) |                                                 |
| Protection circuits            |       | Power supply reverse polarity protection, output short-circuit protection, output reverse polarity protection (*3)                                                                                                        |                                  |                                              |                                                 |
| Timer function                 |       | ON/OFF-delay timer: 10 ms (each fixed)                                                                                                                                                                                    |                                  | OFF-delay timer: 40 ms (fixed)               |                                                 |
| Mutual interference prevention |       | Up to 5 Amplifiers (optically synchronized)                                                                                                                                                                               |                                  |                                              | None                                            |
| Ambient illumination           |       | Up to 5 Amplifiers (optically synchronized)                                                                                                                                                                               |                                  |                                              |                                                 |
| Ambient temperature range      |       | Receiver side<br>Incandescent lamp: 10,000 lux max.<br>Sunlight: 20,000 lux max.                                                                                                                                          |                                  |                                              |                                                 |
| Ambient humidity range         |       | Operating: Groups of 1 to 3 Amplifiers:    −25°C to 55°C<br>Groups of 4 to 11 Amplifiers:   −25°C to 50°C<br>Groups of 12 to 16 Amplifiers: −25°C to 45°C<br>Storage:       −30°C to 70°C (with no icing or condensation) |                                  |                                              |                                                 |
| Insulation resistance          |       | Operating and storage: 35% to 85% (with no condensation)                                                                                                                                                                  |                                  |                                              |                                                 |
| Dielectric strength            |       | 20 MΩ. min. (at 500 VDC)                                                                                                                                                                                                  |                                  |                                              |                                                 |
| Vibration resistance           |       | 1,000 VAC at 50/60 Hz for 1 minute (*4)                                                                                                                                                                                   |                                  |                                              |                                                 |
| Shock resistance               |       | Destruction: 10 to 55 Hz with a 1.5-mm double amplitude for 2 hrs each in X, Y and Z directions                                                                                                                           |                                  |                                              |                                                 |
| Degree of protection           |       | Destruction: 500 m/s <sup>2</sup> , for 3 times each in X, Y and Z directions                                                                                                                                             |                                  |                                              |                                                 |
| Connection method              |       | Destruction: 500 m/s <sup>2</sup> , for 3 times each in X, Y and Z directions                                                                                                                                             |                                  |                                              | IEC 60529 IP66 (with Protective Cover attached) |
| Weight (packed state)          |       | Pre-wired (standard cable length: 2 m), or connector                                                                                                                                                                      |                                  |                                              |                                                 |
| Material                       | Case  | Pre-wired model: Approx. 100 g, Model with connector: Approx. 55 g (*5)                                                                                                                                                   |                                  |                                              |                                                 |
|                                | Cover | Polybutylene terephthalate (PBT)                                                                                                                                                                                          |                                  |                                              | Polyethersulfone (PES)                          |
| Accessories                    |       | Polycarbonate                                                                                                                                                                                                             |                                  |                                              |                                                 |
|                                |       | Instruction manual                                                                                                                                                                                                        |                                  |                                              |                                                 |

\*1. For the E3X-NA, residual voltage is 1 V max.

\*2. When there are 8 or more E3X-NA Amplifiers mounted side-by-side, the response time will be 350  $\mu$ s max.

\*3. The E3X-NA does not have output reverse polarity prevention.

\*4. Water-resistant models and models with connectors have a dielectric strength of 500 VAC.

\*5. Add 10 g for water-resistant models.

### Amplifier Unit Connectors


| Item                  | Model   | E3X-CN11                                                                                                                                                                                            | E3X-CN12     |
|-----------------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Rated current         |         | 2.5 A                                                                                                                                                                                               |              |
| Rated voltage         |         | 50 V                                                                                                                                                                                                |              |
| Contact resistance    |         | 20 m $\Omega$ max. (20 mVDC max., 100 mA max.)<br>(The above figure is for connection to the Amplifier Unit and the adjacent Connector. It does not include the conductor resistance of the cable.) |              |
| Number of insertions  |         | Destruction: 50 times (for connection to the Amplifier Unit and the adjacent Connector)                                                                                                             |              |
| Material              | Housing | Polybutylene terephthalate (PBT)                                                                                                                                                                    |              |
|                       | Contact | Phosphor bronze/gold-plated nickel                                                                                                                                                                  |              |
| Weight (packed state) |         | Approx. 55 g                                                                                                                                                                                        | Approx. 25 g |

## Fiber Unit Overview

No snagging, no breaking:  
Right-angle (L-shaped) Models





### Feature 1 | L-shaped Attachment



No snagging during maintenance.  
Fiber flexibility prevents breaking.

### Feature 2 | New Head Shape




Convenient design  
accommodates two wrench sizes.  
Allows quick tightening.

\*For M6 models.




Flat and flexible fiber models are easy to mount  
and will not break.

### Reflective Fiber Units

Flat View  
E32-D15ZR

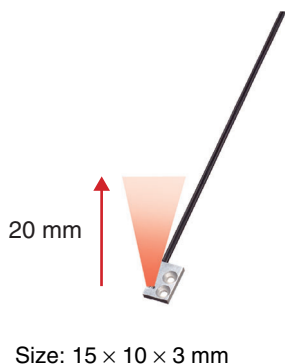


### Feature | No Breaking



A large number of ultrafine cores are all surrounded by cladding. As a result, the fiber is flexible and can be bent without significantly reducing the light intensity. This helps solve problems, such as fiber being broken by getting caught on other objects.


### Through-beam Fiber Units

Top View  
E32-T15XR

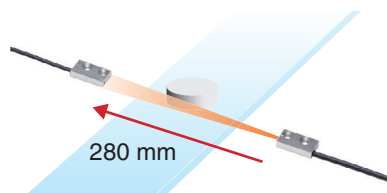


Size: 15 × 8 × 3 mm

Side View  
E32-T15YR



Flat View  
E32-T15ZR





## Sensing Distance

### Through-beam Models

(Unit: mm)

| Type                         |                                 | Model                                                       | E3X-SD□<br>E3X-NA□ | E3X-NA□F                    |
|------------------------------|---------------------------------|-------------------------------------------------------------|--------------------|-----------------------------|
|                              |                                 |                                                             | Standard models    | High-speed detection models |
| Standard models              | Flexible (new standard)         | E32-T11R/E32-T12R/E32-T15XR/E32-TC200BR (B4R)               | 280                | 80                          |
|                              |                                 | E32-T14LR/E32-T15YR/E32-T15ZR                               | 110                | 33                          |
|                              |                                 | E32-T21R/E32-T22R/E32-T222R/E32-T25XR/<br>E32-TC200FR (F4R) | 60                 | 18                          |
|                              |                                 | E32-T24R/E32-T25YR/E32-T25ZR                                | 30                 | 9                           |
|                              | Standard                        | E32-TC200/E32-T12/E32-T15X/E32-TC200B (B4)                  | 400                | 120                         |
|                              |                                 | E32-T14L/E32-T15Y/E32-T15Z                                  | 240                | 70                          |
|                              |                                 | E32-TC200A                                                  | 360                | 100                         |
|                              |                                 | E32-TC200E/E32-T22/E32-T222/E32-T25X/E32-TC200F (F4)        | 100                | 30                          |
|                              |                                 | E32-T24/E32-T25Y/E32-T25Z                                   | 90                 | 27                          |
|                              | Break resistant                 | E32-T11/E32-T12B/E32-T15XB                                  | 360                | 100                         |
|                              |                                 | E32-T21/E32-T221B/E32-T22B                                  | 100                | 30                          |
|                              |                                 | E32-T25XB                                                   | 75                 | 20                          |
|                              | Fluorine coating                | E32-T11U                                                    | 360                | 100                         |
| Special-beam models          | Long distance, high power       | E32-T17L                                                    | 14000              | 4200                        |
|                              |                                 | E32-TC200 + E39-F1                                          | 3000               | 900                         |
|                              |                                 | E32-T11R + E39-F1                                           | 2100               | 630                         |
|                              |                                 | E32-T11 + E39-F1                                            | 2000               | 600                         |
|                              |                                 | E32-T14                                                     | 1800               | 540                         |
|                              |                                 | E32-T11L/E32-T12L                                           | 700                | 210                         |
|                              |                                 | E32-T11L + E39-F2                                           | 500                | 150                         |
|                              |                                 | E32-T11R + E39-F2                                           | 220                | 65                          |
|                              |                                 | E32-T11 + E39-F2                                            | 360                | 100                         |
|                              |                                 | E32-T21L/E32-T22L                                           | 200                | 60                          |
|                              | Ultracompact, ultrafine sleeve  | E32-T223R                                                   | 60                 | 18                          |
|                              |                                 | E32-T33-S5                                                  | 20                 | 6                           |
|                              |                                 | E32-T333-S5                                                 | 5                  | 1.5                         |
|                              |                                 | E32-T334-S5                                                 | 2.5                | 0.8                         |
|                              | Fine beam (narrow vision field) | E32-T22S                                                    | 1000               | 300                         |
|                              |                                 | E32-T24S                                                    | 700                | 210                         |
|                              | Area sensing                    | E32-T16PR                                                   | 450                | 130                         |
|                              |                                 | E32-T16P                                                    | 600                | 180                         |
|                              |                                 | E32-T16JR                                                   | 390                | 110                         |
|                              |                                 | E32-T16J                                                    | 520                | 150                         |
|                              |                                 | E32-T16WR                                                   | 690                | 200                         |
|                              |                                 | E32-T16W                                                    | 920                | 270                         |
|                              |                                 | E32-T16                                                     | 1500               | 450                         |
|                              |                                 | E32-M21                                                     | 300                | 90                          |
| Environment resistive models | Heat resistant                  | E32-T51                                                     | 400                | 120                         |
|                              |                                 | E32-T54                                                     | 130                | 35                          |
|                              |                                 | E32-T81R-S                                                  | 180                | 50                          |
|                              |                                 | E32-T61-S + E39-F2                                          | 390                | 130                         |
|                              |                                 | E32-T61-S + E39-F1                                          | 3000               | 900                         |
|                              |                                 | E32-T84S-S                                                  | 700                | 210                         |
|                              |                                 | E32-T61-S                                                   | 300                | 90                          |
|                              | Chemical resistant              | E32-T11F                                                    | 1050               | 380                         |
|                              |                                 | E32-T12F                                                    | 1600               | 480                         |
|                              |                                 | E32-T14F                                                    | 200                | 60                          |
|                              |                                 | E32-T51F                                                    | 700                | 200                         |
|                              |                                 | E32-T81F-S                                                  | 350                | 100                         |
|                              | Vacuum resistant                | E32-T51V                                                    | 100                | ---                         |
|                              |                                 | E32-T51V + E39-F1V                                          | 600                | ---                         |
|                              |                                 | E32-T54V                                                    | 65                 | ---                         |
|                              |                                 | E32-T54V + E39-F1V                                          | 390                | ---                         |
|                              |                                 | E32-T84SV                                                   | 250                | ---                         |

For information on Fiber Units, refer to the *E32 Series Fiber Sensor Best Selection* (Cat. No. E354).

# E3X-SD/-NA

## Reflective Models

(Unit: mm)

| Type                          |                                   | Model                                                       | E3X-SD□<br>E3X-NA□                            | E3X-NA□F                    |
|-------------------------------|-----------------------------------|-------------------------------------------------------------|-----------------------------------------------|-----------------------------|
|                               |                                   |                                                             | Standard models                               | High-speed detection models |
| Standard models               | Flexible<br>(new standard)        | E32-D11R/E32-D12R/E32-D15XR/E32-DC200BR (B4R)               | 90                                            | 30                          |
|                               |                                   | E32-D14LR                                                   | 16                                            | 5                           |
|                               |                                   | E32-D15YR/E32-D15ZR                                         | 20                                            | 5                           |
|                               |                                   | E32-D211R/E32-D21R/E32-D22R/E32-D25XR/<br>E32-DC200FR (F4R) | 15                                            | 5                           |
|                               |                                   | E32-D24R                                                    | 7                                             | 2.3                         |
|                               |                                   | E32-D25YR/E32-D25ZR                                         | 4                                             | 1.2                         |
|                               |                                   | E32-DC200/E32-D15X/E32-DC200B (B4)                          | 150                                           | 50                          |
|                               | Standard                          | E32-D12                                                     | 120                                           | 40                          |
|                               |                                   | E32-D14L                                                    | 40                                            | 13                          |
|                               |                                   | E32-D15Y/E32-D15Z                                           | 50                                            | 15                          |
|                               |                                   | E32-D211/E32-DC200E/E32-D22/E32-D25X/<br>E32-DC200F (F4)    | 36                                            | 12                          |
|                               |                                   | E32-D24                                                     | 15                                            | 5                           |
|                               |                                   | E32-D25Y/E32-D25Z                                           | 10                                            | 3.3                         |
|                               |                                   | E32-D11/E32-D15XB                                           | 90                                            | 30                          |
|                               | Break resistant                   | E32-D21B/E32-D221B                                          | 35                                            | 10                          |
|                               |                                   | E32-D21/E32-D22B                                            | 15                                            | 5                           |
|                               |                                   | E32-D25XB                                                   | 25                                            | 8                           |
|                               | Fluorine coating                  | E32-D11U                                                    | 90                                            | 30                          |
| Special-beam models           | Long distance,<br>high power      | E32-D16                                                     | 40 to 400                                     | 55 to 70                    |
|                               |                                   | E32-D11L                                                    | 200                                           | 65                          |
|                               |                                   | E32-D21L/E32-D22L                                           | 50                                            | 17                          |
|                               | Ultracompact,<br>ultrafine sleeve | E32-D33                                                     | 10                                            | 3.3                         |
|                               |                                   | E32-D331                                                    | 1.5                                           | 0.5                         |
|                               | Coaxial, small spot               | E32-CC200R                                                  | 75                                            | 25                          |
|                               |                                   | E32-CC200                                                   | 150                                           | 50                          |
|                               |                                   | E32-D32L                                                    | 80                                            | 25                          |
|                               |                                   | E32-C31/E32-D32                                             | 40                                            | 13                          |
|                               |                                   | E32-C42 + E39-F3A                                           | Spot diameter of 0.1 to 0.6 mm at 6 to 15 mm. |                             |
|                               |                                   | E32-D32 + E39-F3A                                           | Spot diameter of 0.5 to 1 mm at 6 to 15 mm.   |                             |
|                               |                                   | E32-C41 + E39-F3A-5                                         | Spot diameter of 0.1 mm at 7 mm.              |                             |
|                               |                                   | E32-C31 + E39-F3A-5                                         | Spot diameter of 0.5 mm at 7 mm.              |                             |
|                               |                                   | E32-C41 + E39-F3B                                           | Spot diameter of 0.2 mm at 17 mm.             |                             |
|                               |                                   | E32-C31 + E39-F3B                                           | Spot diameter of 0.5 mm at 17 mm.             |                             |
|                               |                                   | E32-C31 + E39-F3C                                           | Spot diameter of 4 mm max. at 0 to 20 mm.     |                             |
|                               | Area sensing                      | E32-D36P1                                                   | 75                                            | 25                          |
|                               | Retro-reflective                  | E32-R21 + E39-R3 (provided)                                 | 10 to 250                                     |                             |
|                               |                                   | E32-R16 + E39-R1 (provided)                                 | 150 to 1500                                   | 150 to 1000                 |
|                               | Convergent-reflective             | E32-L25/E32-L25A                                            | 3.3                                           |                             |
|                               |                                   | E32-L24S                                                    | 0 to 4                                        |                             |
|                               |                                   | E32-L24L                                                    | 2 to 6 (center 4)                             |                             |
|                               |                                   | E32-L25L                                                    | 5.4 to 9 (center 7.2)                         |                             |
|                               |                                   | E32-L86                                                     | 4 to 10                                       |                             |
|                               |                                   | E32-L16                                                     | 0 to 15                                       | 0 to 13                     |
| Environ-ment resistive models | Heat resistant                    | E32-D51                                                     | 120                                           | 40                          |
|                               |                                   | E32-D81R/E32-D61                                            | 45                                            | 15                          |
|                               |                                   | E32-D73                                                     | 30                                            | 10                          |
|                               | Chemical resistant                | E32-D12F                                                    | 50                                            | 16                          |
|                               |                                   | E32-D14F                                                    | 20                                            | 6.5                         |

For information on Fiber Units, refer to the *E32 Series Fiber Sensor Best Selection* (Cat. No. E354).


## I/O Circuit Diagrams

| Output form | Model                                                                                 | Output transistor operation mode | Timing charts                                                                                                                                                   | Operation selector | Output circuit                                                                                           |
|-------------|---------------------------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------------------------------|
| NPN Output  | E3X-SD11<br>E3X-SD6<br><br>E3X-NA11<br>E3X-NA6<br>E3X-NA11F<br>E3X-NA11V<br>E3X-NA14V | Light-ON                         | Incident light<br>No incident light<br>Operation indicator (orange) ON OFF<br>Output transistor ON OFF<br>Load Operate Reset<br>(Between brown and black leads) | LIGHT ON (L-ON)    | <p>• M8 Connector Pin Arrangement</p> <p>Note: Pin 2 is not used.</p> <p>*Not present on the E3X-NA.</p> |
|             |                                                                                       | Dark-ON                          | Incident light<br>No incident light<br>Operation indicator (orange) ON OFF<br>Output transistor ON OFF<br>Load Operate Reset<br>(Between brown and black leads) | DARK ON (D-ON)     |                                                                                                          |
| PNP Output  | E3X-SD41<br>E3X-SD8<br><br>E3X-NA41<br>E3X-NA8<br>E3X-NA41F<br>E3X-NA41V<br>E3X-NA44V | Light-ON                         | Incident light<br>No incident light<br>Operation indicator (orange) ON OFF<br>Output transistor ON OFF<br>Load Operate Reset<br>(Between blue and black leads)  | LIGHT ON (L-ON)    | <p>• M8 Connector Pin Arrangement</p> <p>Note: Pin 2 is not used.</p> <p>*Not present on the E3X-NA.</p> |
|             |                                                                                       | Dark-ON                          | Incident light<br>No incident light<br>Operation indicator (orange) ON OFF<br>Output transistor ON OFF<br>Load Operate Reset<br>(Between blue and black leads)  | DARK ON (D-ON)     |                                                                                                          |

Note: Timing Charts for Timer Settings (T: Set Time)

| ON delay                                                                              | OFF delay                                                                             |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Incident light<br>No incident light<br>L-ON ON OFF<br>D-ON ON OFF<br>T <sub>1</sub> T | Incident light<br>No incident light<br>L-ON ON OFF<br>D-ON ON OFF<br>T <sub>1</sub> T |

## Plug (Sensor I/O Connector)

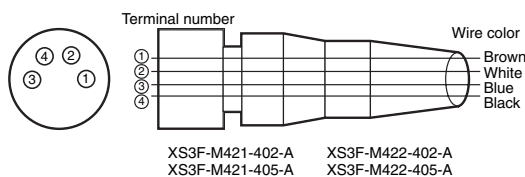

| Classification | Wire color | Connection pin | Application        |
|----------------|------------|----------------|--------------------|
| DC             | Brown      | 1              | Power supply (+V)  |
|                | White      | 2              | ---                |
|                | Blue       | 3              | Power supply (0 V) |
|                | Black      | 4              | Output             |


Note: Pin 2 is not used.

# E3X-SD/-NA


## Nomenclature

### Amplifier Units

#### E3X-SD□

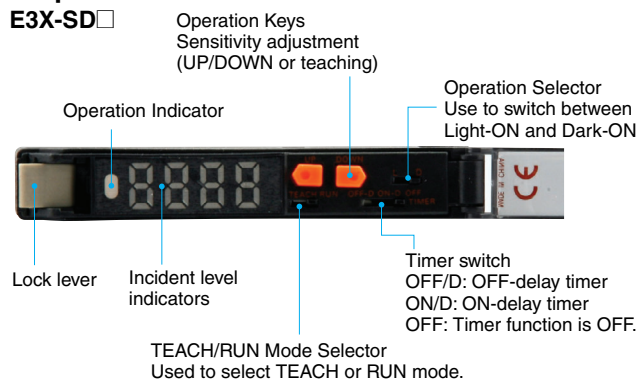

#### E3X-NA

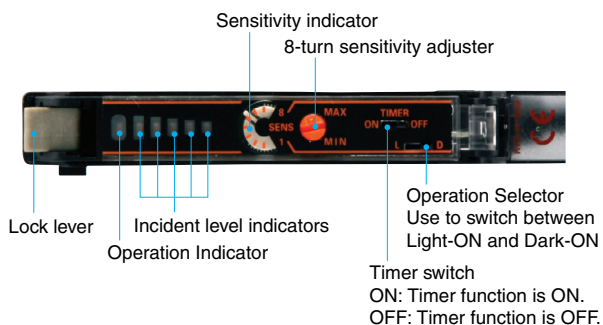

## Safety Precautions

### ⚠ WARNING

**This product is not designed or rated for ensuring safety of persons either directly or indirectly.**

**Do not use it for such purposes.**



### ⚠ Caution

**Do not exceed the rated voltage.  
Excess voltage may result in malfunction or fire.**



**Do not use an AC power supply.  
Using an AC power supply may result in rupturing.**



**High-temperature environments may result in burn injury.**



### Precautions for Safe Use

The following precautions must be observed to ensure safety.

1. Do not use the product in locations where flammable or explosive gas is present.
2. Do not use the product in locations subject to splashing water, oil, or chemicals, or in locations subject to steam.
3. Do not attempt to disassemble, repair, or modify the product.
4. Do not apply voltage or current in excess of the rated ranges.
5. Do not use the product in atmospheres or environments that exceed product ratings.
6. Do not wire the product incorrectly, such as using incorrect power supply polarity.
7. Connect the load properly.
8. Do not short-circuit both ends of the load.
9. Do not use the product if the case is damaged.
10. When disposing of the product, dispose of it as industrial waste.
11. Do not use the product in locations subject to direct sunlight.
12. The surface temperature of the product may rise as a result of the ambient temperature, power supply, or other usage conditions. Use caution when performing maintenance and washing. Failure to do so may result in burn injury.

## Precautions for Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

### Amplifier Units

#### ● Designing

##### Communications Hole

The hole on the side of the Amplifier Unit is a communications hole for preventing mutual interference when Amplifier Units are mounted side-by-side. The E3X-MC11 Mobile Console (order separately) cannot be used.

If an excessive amount of light is received via the Sensor, the mutual interference prevention function may not work. In this case, make the appropriate adjustments using the sensitivity adjuster.


The mutual interference prevention function will not operate when the E3X-SD/NA is used side-by-side with E3X-DA-N models.

#### ● Mounting


##### DIN Track Mounting/Removal

##### Mounting Amplifier Units

1. Mount the Amplifier Units one at a time onto the DIN track.



2. Slide the Amplifier Units together, line up the clips, and press the Amplifier Units together until they click into place.

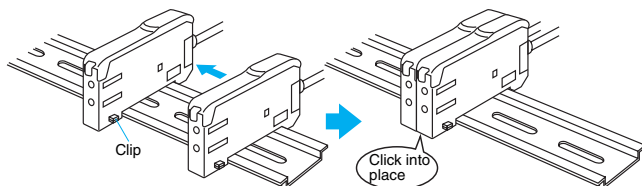

##### Removing Amplifier Units

Slide Amplifier Units away from each other, and remove from the DIN track one at a time. (Do not attempt to remove Amplifier Units from the DIN track without separating them first.)


- Note 1.** The specifications for ambient temperature will vary according to the number of Amplifier Units used together. For details, refer to *Ratings and Specifications*.
- 2.** Always turn OFF the power supply before mounting or removing Amplifier Units.

### Fiber Connection and Disconnection

The E3X Amplifier Unit has a lock lever. Connect or disconnect the fibers to or from the E3X Amplifier Unit using the following procedures:


#### 1. Connection

Open the Protective Cover, insert the fibers according to the fiber insertion marks on the side of the Amplifier Unit, and lower the lock lever.

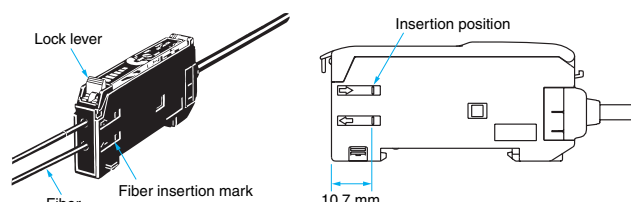

#### 2. Disconnection

Remove the Protective Cover and raise the lock lever to pull out the fiber.

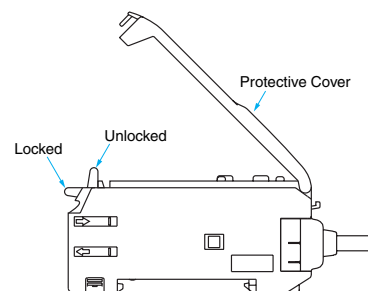

**Note:** To maintain the fiber properties, confirm that the lock is released before removing the fiber.

#### 3. Precautions for Fiber Connection/Disconnection

Be sure to lock or unlock the lock lever within an ambient temperature range between  $-10^{\circ}\text{C}$  and  $40^{\circ}\text{C}$ .

#### ● Operating Environment

##### Ambient Conditions

If dust or dirt adhere to the hole for optical communications, it may prevent normal communications. Be sure to remove any dust or dirt before using the Units.

#### ● Other

##### Protective Cover


Be sure to mount the Protective Cover before use.

## Amplifier Units with Connectors


### ● Mounting

#### Mounting Connectors

1. Insert the Master or Slave Connector into the Amplifier Unit until it clicks into place.

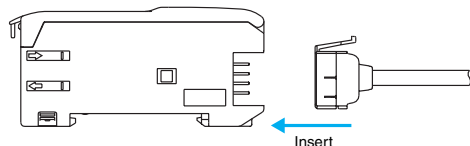


2. Join Amplifier Units together as required after all the Master and Slave Connectors have been inserted.
3. Attach the stickers (provided as accessories) to the sides of Master and Slave Connectors that are not connected to other Connectors.

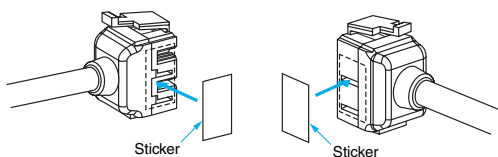

**Note:** Attach the stickers to the sides with grooves.


#### Removing Connectors

1. Slide the slave Amplifier Unit for which the Connector is to be removed away from the rest of the group.
2. After the Amplifier Unit has been separated, press down on the lever on the Connector and remove it. (Do not attempt to remove Connectors without separating them from other Amplifier Units first.)

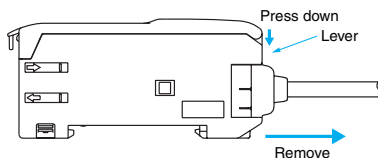


#### Mounting End Plate (PFP-M)

Depending on how it is mounted, an Amplifier Unit may move during operation. In this case, use an End Plate. Before mounting an End Plate, remove the clip from the master Amplifier Unit using a nipper or similar tool.




The clip can also be removed using the following mechanism, which is incorporated in the construction of the section underneath the clip.

1. Insert the clip to be removed into the slit underneath the clip on another Amplifier Unit.



2. Remove the clip by rotating the Amplifier Unit.



#### Pull Strengths for Connectors (Including Cables)

E3X-CN11: 30 N max.

E3X-CN12: 12 N max.




## Dimensions

### Amplifier Units


#### Amplifier Units with Cables

E3X-SD11  
E3X-SD41  
E3X-NA11  
E3X-NA11F  
E3X-NA41  
E3X-NA41F

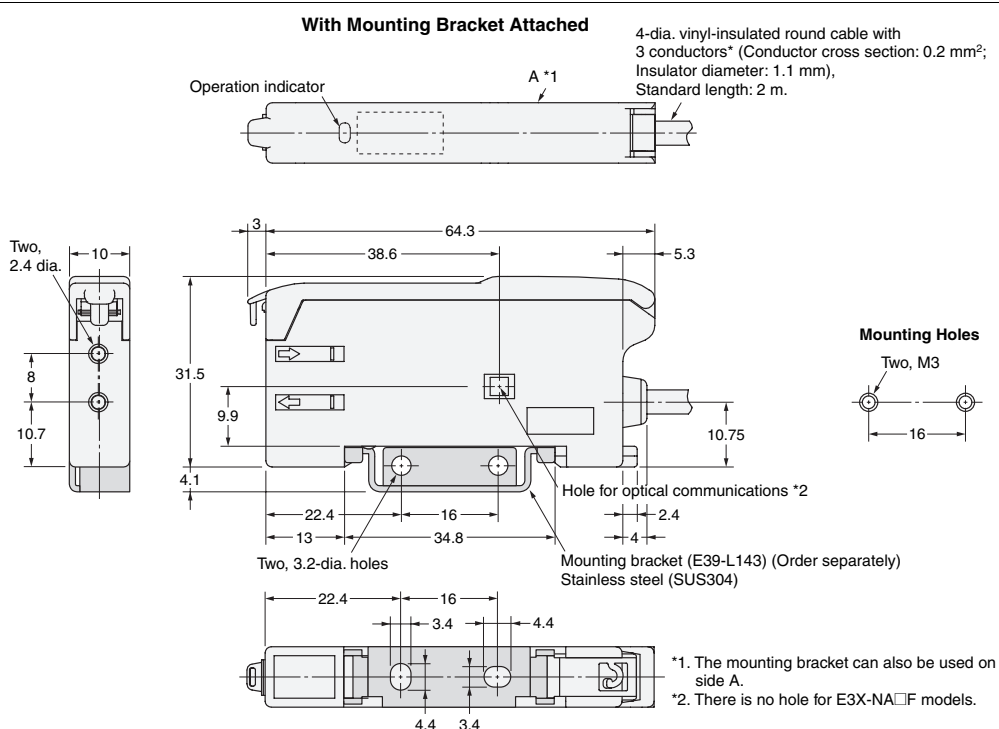


#### Amplifier Units with Connectors


E3X-SD6  
E3X-SD8  
E3X-NA6  
E3X-NA8

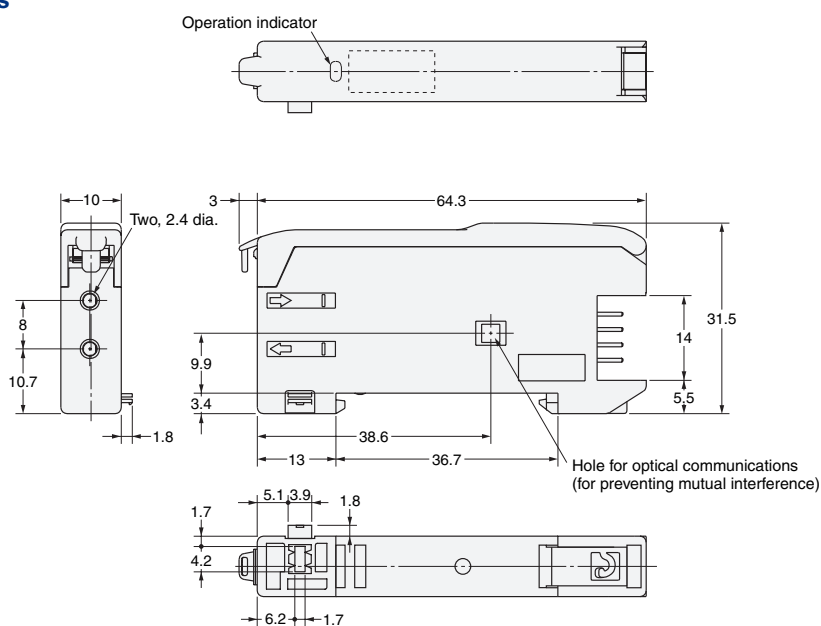

#### Dimensions with Master Connector Connected

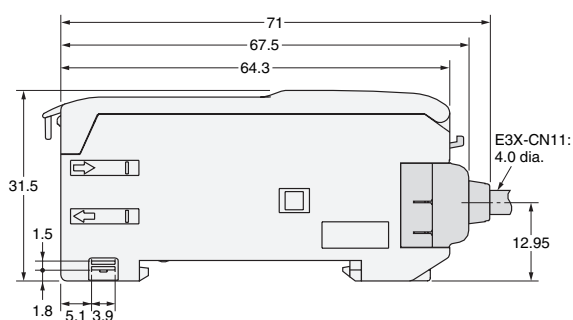

#### Dimensions with Slave Connector Connected



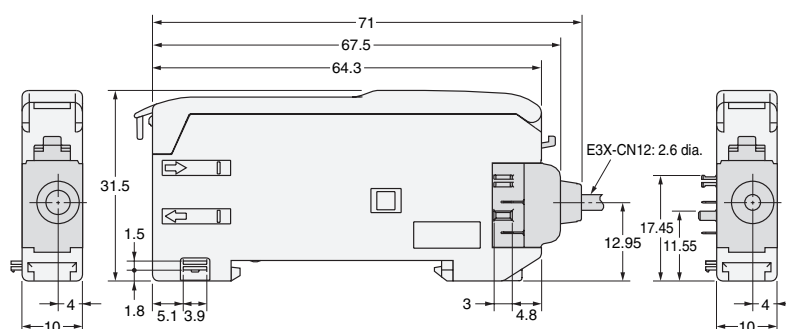


# E3X-SD/-NA


## Amplifier Units with Cables, Water-resistant Models

E3X-NA11V

E3X-NA41V

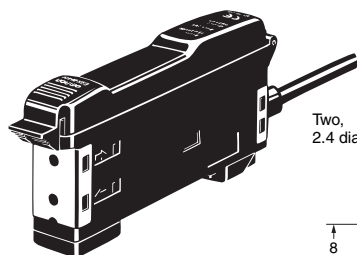

### With Mounting Bracket Attached

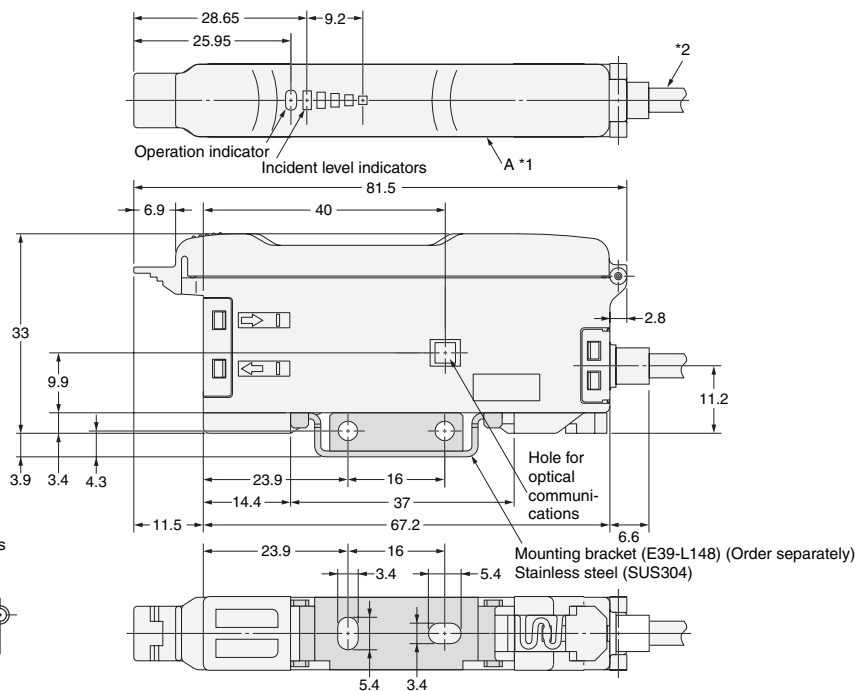




\*1. The mounting bracket can also be used on side A.

\*2. 4-dia. vinyl-insulated round cable with 3 conductors  
(Conductor cross section: 0.45 mm<sup>2</sup>, Insulator diameter:  
1.1 mm), Standard length: 2 m.

## Amplifier Units with Connectors, Water-resistant Models


E3X-NA14V

E3X-NA44V





\* The mounting bracket can also be used on this side A.

### With Mounting Bracket Attached

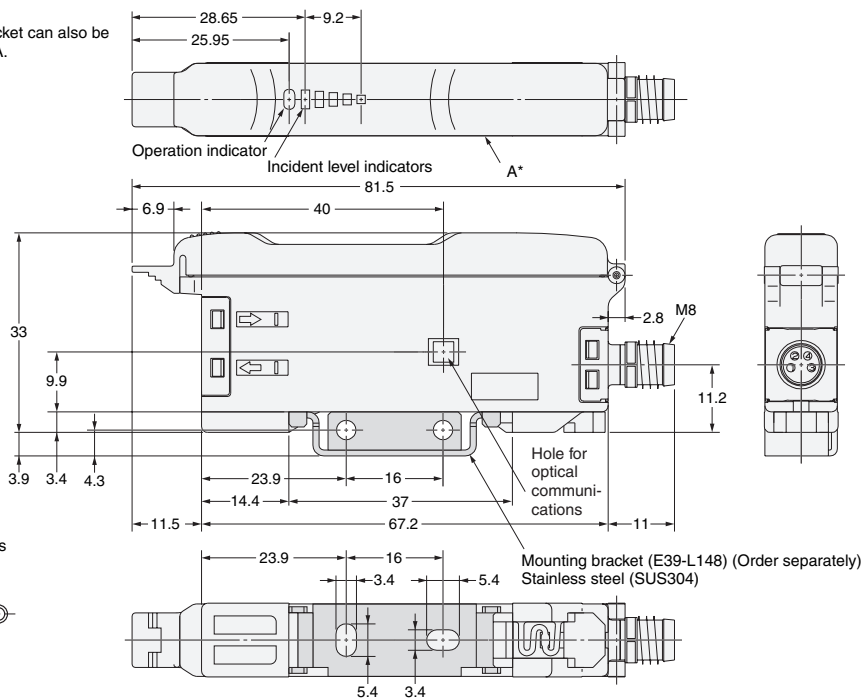



## Amplifier Unit Connectors

### Master Connector E3X-CN11

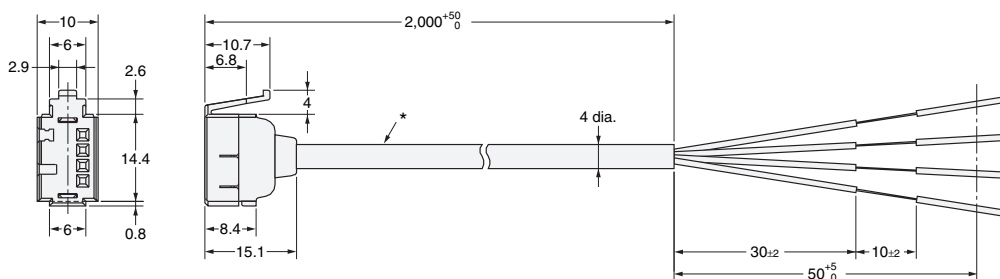

\*E3X-CN11: 2.6-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section: 0.2 mm<sup>2</sup>, Insulator diameter: 1.1 mm)


### Slave Connector E3X-CN12

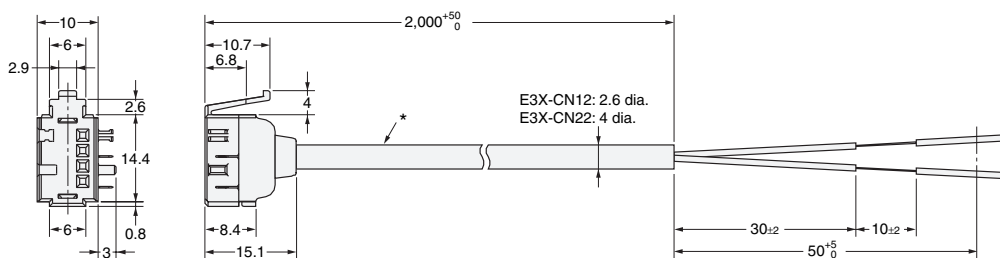


\*E3X-CN12: 2.6-dia. vinyl-insulated round cable with 1 conductor (Conductor cross section: 0.2 mm<sup>2</sup>, Insulator diameter: 1.1 mm)

## Accessories (Order Separately)



### Mounting Brackets E39-L143



Material: Stainless steel  
(SUS304)

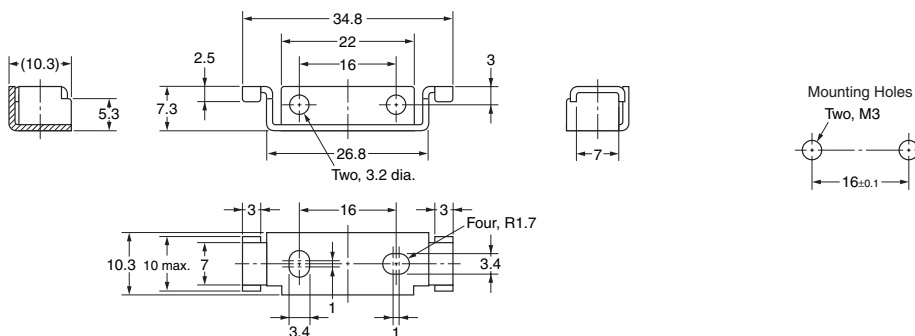

### End Plates PFP-M

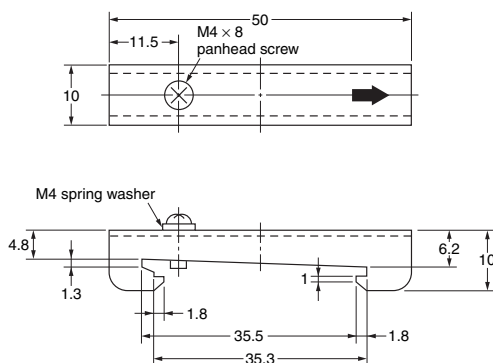

For information on Fiber Units, refer to the *E32 Series Fiber Sensor Best Selection* (Cat. No. E354).

# E3X-SD/-NA

## Operating Procedure

### E3X-SD

#### 1 Displays

A 7-segment display showing excess gain is provided in addition to the orange operation indicator. Use these when adjusting the light axis and setting the sensitivity at setup.

| Display/indicator status (for L/ON)                                               | Excess gain        | Description                                                             |
|-----------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------|
|  | 999%<br>(10 times) | 110% min.<br>Stable incident light                                      |
|  | 100%               | 90% to 110%<br>Unstable incident light or<br>Unstable interrupted light |
|  | 0%                 | 90% max.<br>Stable interrupted light                                    |

#### 2 Sensitivity Setting

The sensitivity can be set with the UP and DOWN Keys similar to using an adjuster knob. The sensitivity can also be easily set by using the following three teaching functions.

##### 2-1. Maximum Sensitivity Setting

The sensitivity can be set to the maximum. This is the optimal setting for resistance against the effects of dust.

| Operation description                                            | Switch/Key | Display                                                                             |
|------------------------------------------------------------------|------------|-------------------------------------------------------------------------------------|
| Set the TEACH/RUN selector switch to TEACH.                      | TEACH RUN  |  |
| Press the UP Key for 3 s min.                                    | UP         |  |
| Set the TEACH/RUN selector switch to RUN (start of measurement). | TEACH RUN  |  |


##### 2-2. Teaching with/without a Workpiece

Two points (one with the workpiece and the other without) are detected, and the operating level is set to the midpoint.

| Operation description                                            | Switch/Key | Display                                                                             |
|------------------------------------------------------------------|------------|-------------------------------------------------------------------------------------|
| Set the TEACH/RUN selector switch to TEACH.                      | TEACH RUN  |  |
| Press the UP Key with the workpiece present.                     | UP         |  |
| Press the UP Key with the workpiece not present.                 | UP         |  |
| Set the TEACH/RUN selector switch to RUN (start of measurement). | TEACH RUN  |  |

##### 2-3. Automatic Teaching

Changes within a time are detected, and the operating level is set to the midpoint between the maximum and the minimum values of the changes. This setting is optimal for when the workpieces cannot be stopped.


| Operation description                       | Switch/Key | Display                                                                             |
|---------------------------------------------|------------|-------------------------------------------------------------------------------------|
| Set the TEACH/RUN selector switch to TEACH. | TEACH RUN  |  |
| Press the UP Key.                           | UP         |  |

| Operation description                                                                     | Switch/Key | Display                                                                             |
|-------------------------------------------------------------------------------------------|------------|-------------------------------------------------------------------------------------|
| Hold down the UP Key during detection. Let the workpiece pass while the key is held down. | UP         |  |
| Set the TEACH/RUN selector switch to RUN (start of measurement).                          | TEACH RUN  |  |

### E3X-NA

#### 1 Displays

A bar display (with four green and one red) showing excess gain is provided in addition to the orange operation indicator. Use these when adjusting the light axis and setting the sensitivity at setup.

| Display/indicator status (for L/ON)                                                  | Excess gain level       | Description                                              |
|--------------------------------------------------------------------------------------|-------------------------|----------------------------------------------------------|
|    | Approx.<br>120% min.    | Stable incident light                                    |
|    | Approx.<br>110% to 120% |                                                          |
|   | Approx.<br>90% to 110%  | Unstable incident light or<br>Unstable interrupted light |
|  | Approx.<br>80% to 90%   | Stable interrupted light                                 |
|  | Approx.<br>80% max.     |                                                          |

## **READ AND UNDERSTAND THIS DOCUMENT**

Please read and understand this document before using the products. Please consult your OMRON representative if you have any questions or comments.

## **WARRANTY**

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

## **LIMITATIONS OF LIABILITY**

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## **SUITABILITY FOR USE**

THE PRODUCTS CONTAINED IN THIS DOCUMENT ARE NOT SAFETY RATED. THEY ARE NOT DESIGNED OR RATED FOR ENSURING SAFETY OF PERSONS, AND SHOULD NOT BE RELIED UPON AS A SAFETY COMPONENT OR PROTECTIVE DEVICE FOR SUCH PURPOSES. Please refer to separate catalogs for OMRON's safety rated products.

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## **PERFORMANCE DATA**

Performance data given in this document is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

## **CHANGE IN SPECIFICATIONS**

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

## **DIMENSIONS AND WEIGHTS**

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

## **ERRORS AND OMISSIONS**

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

## **PROGRAMMABLE PRODUCTS**

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

## **COPYRIGHT AND COPY PERMISSION**

This document shall not be copied for sales or promotions without permission.

This document is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this document in any manner, for any other purpose. If copying or transmitting this document to another, please copy or transmit it in its entirety.

This document provides information mainly for selecting suitable models. Please read the Instruction sheet carefully for information that the user must understand and accept before purchase, including information on warranty, limitations of liability, and precautions.

**OMRON Corporation**  
Industrial Automation Company

**Sensing Devices Division H.Q.**  
**Industrial Sensors Division**  
Shiokoji Horikawa, Shimogyo-ku,  
Kyoto, 600-8530 Japan  
Tel: (81)75-344-7022/Fax: (81)75-344-7107

**Regional Headquarters**

**OMRON EUROPE B.V.**  
**Sensor Business Unit,**  
Carl-Benz-Str. 4 D-71154 Nufringen,  
Germany  
Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

**OMRON ELECTRONICS LLC**  
One Commerce Drive Schaumburg,  
IL 60173-5302 U.S.A.  
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

**OMRON ASIA PACIFIC PTE. LTD.**  
No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark, Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711  
83 Clemenceau Avenue,

**OMRON (CHINA) CO., LTD.**  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
Pu Dong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

**Authorized Distributor:**

Note: Specifications subject to change without notice.

Cat. No. E388-E1-01