


- Meets UL508 and UL873 spacing
- Up to 30A switching in SPNO and 20A switching in SPDT arrangement
- Open type, dust, flux and fully sealed version available
- UL, CSA and VDE recognised



Options and ordering codes

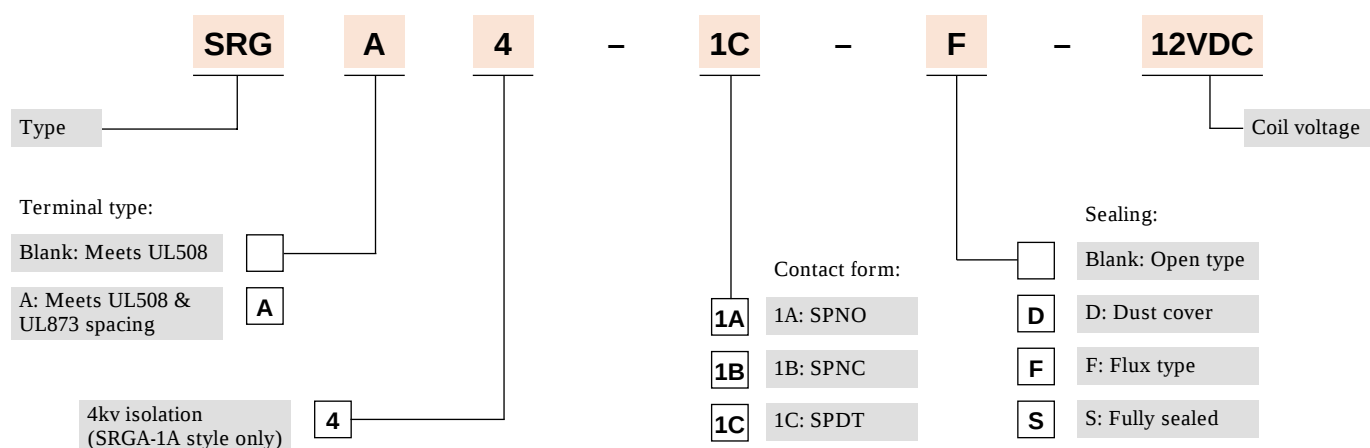

Contact rating

Contact form	1A (SPNO)	1B (SPNC)	1C (SPDT)	
			NO	NC
Maximum switching power	7500VA / 600W	3750VA / 300W	5000VA / 600W	2500VA / 300W
Maximum switching voltage	250VAC / 30VDC			
Maximum switching/carry current	30A	15A	20A	10A

UL, CSA and VDE safety approval ratings available on request

Specifications

Contact material		AgSnInO
Initial contact resistance		50mΩ Max
Operate time		15ms Max. (at rated voltage)
Release time		10ms Max. (at rated voltage)
Nominal operating power		Approx. 930mW
Insulation resistance		100MΩ at 500VDC
Breakdown voltage	Between coil and contacts	SRG-1500Vrms, SRGA-2500Vrms, SRGA4-4000Vrms
	Between open contacts	1500Vrms
Vibration resistance	Operating extremes	10~55Hz, amplitude 1.5mm
	Damage limits	10~55Hz, amplitude 1.5mm
Shock resistance	Operating extremes	10G
	Damage limits	20G
Ambient temperature		-55~+85°C
Life expectancy	Mechanical	10 x 10 ⁶ operations (frequency 18,000 operations/hour)
	Electrical (at max load)	1 x 10 ⁵ operations (frequency 1,200 operations/hour)
Weight		27g

