

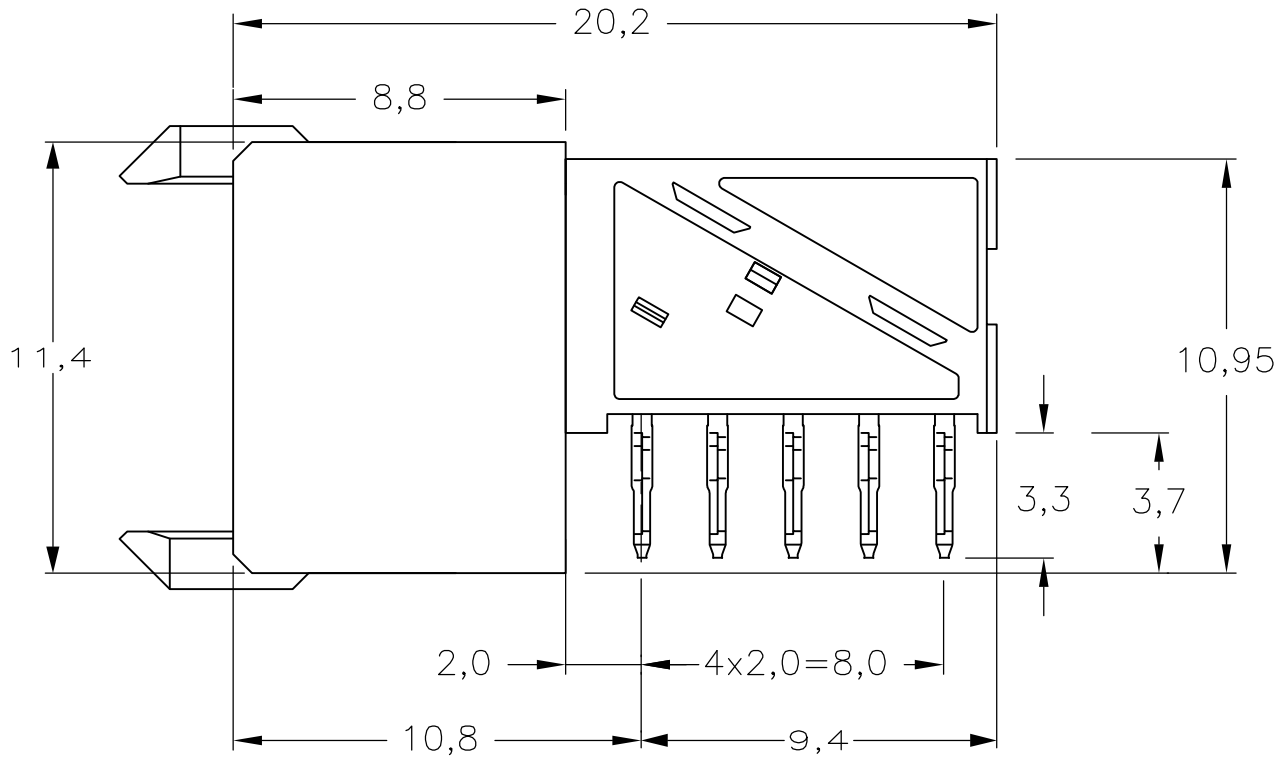
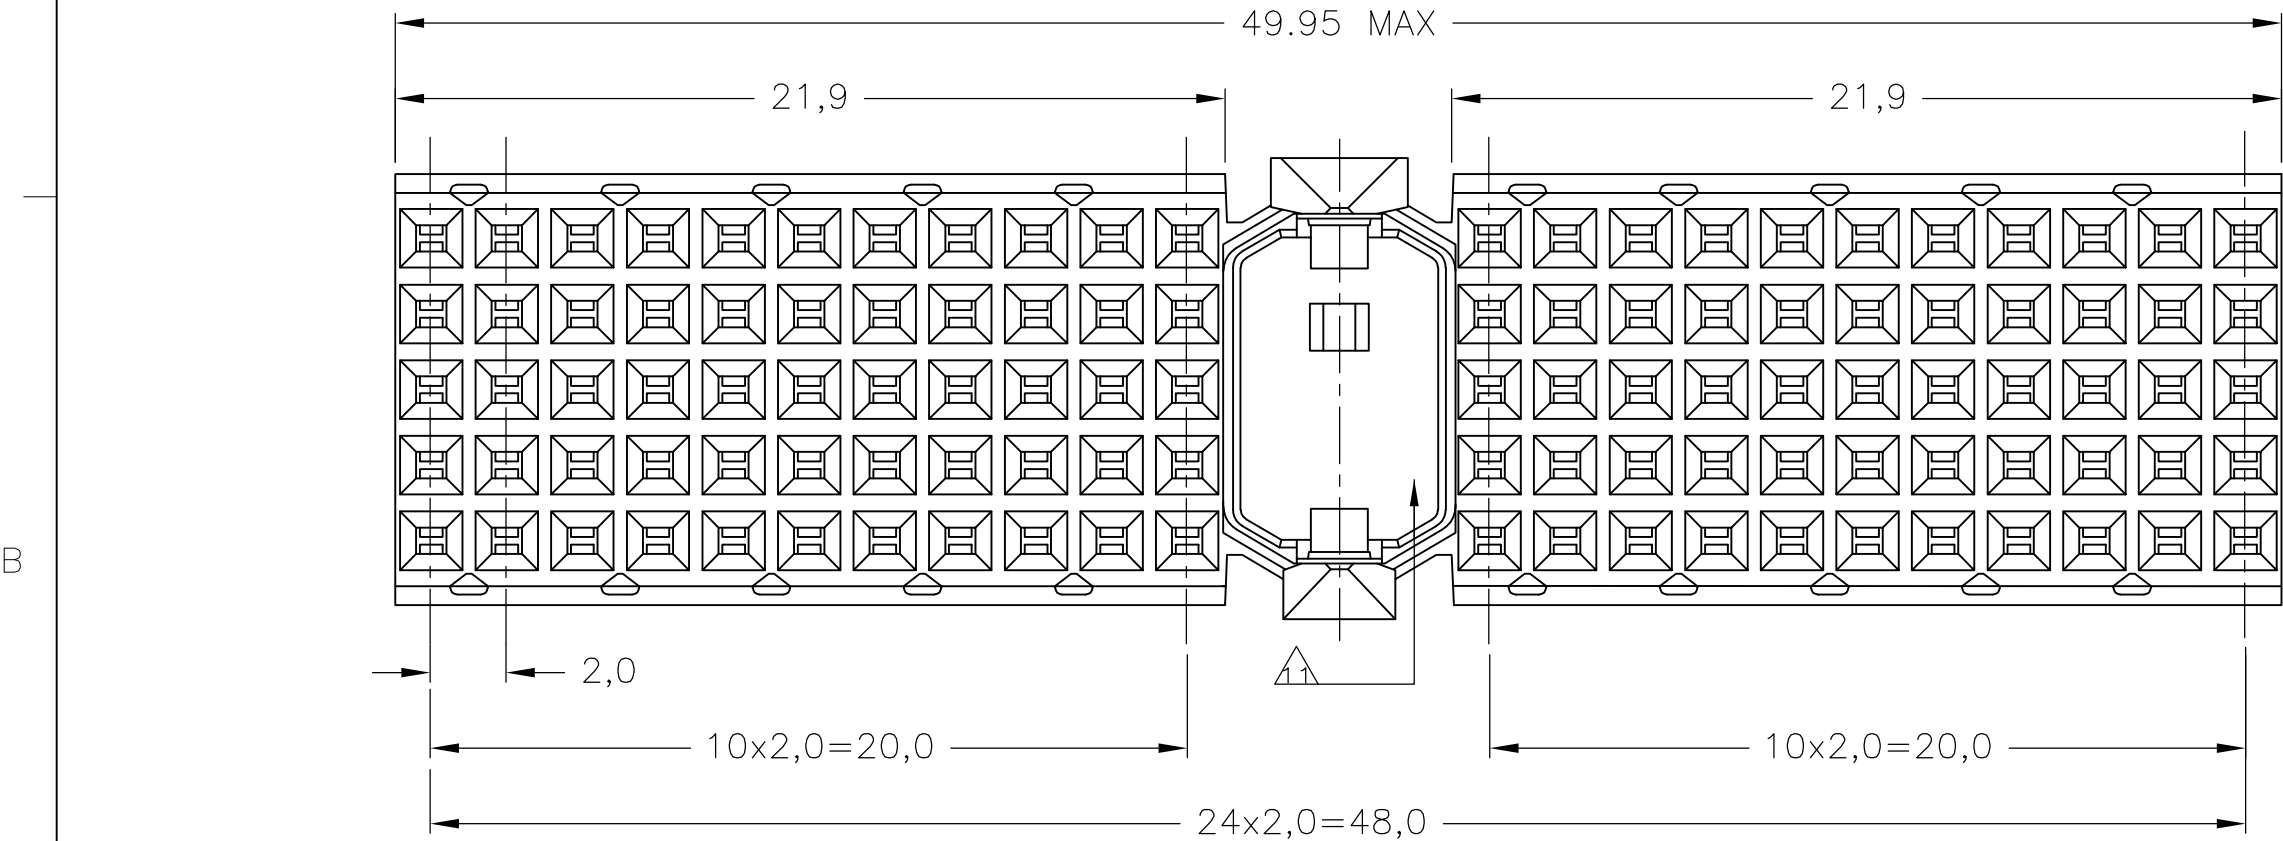
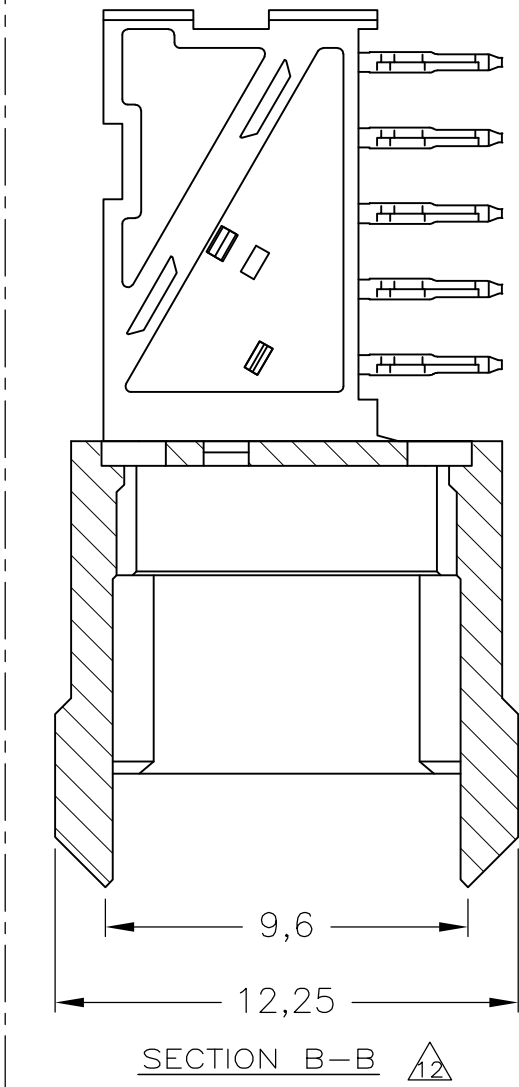
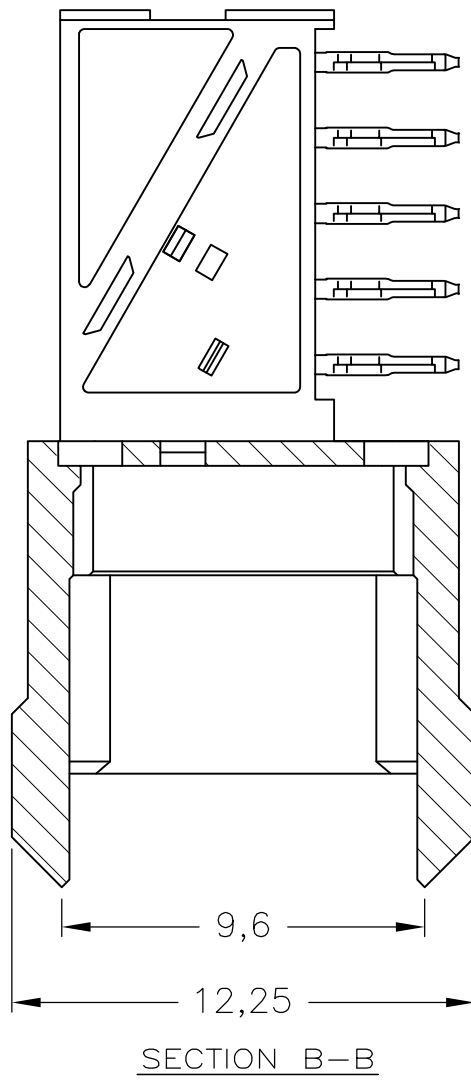
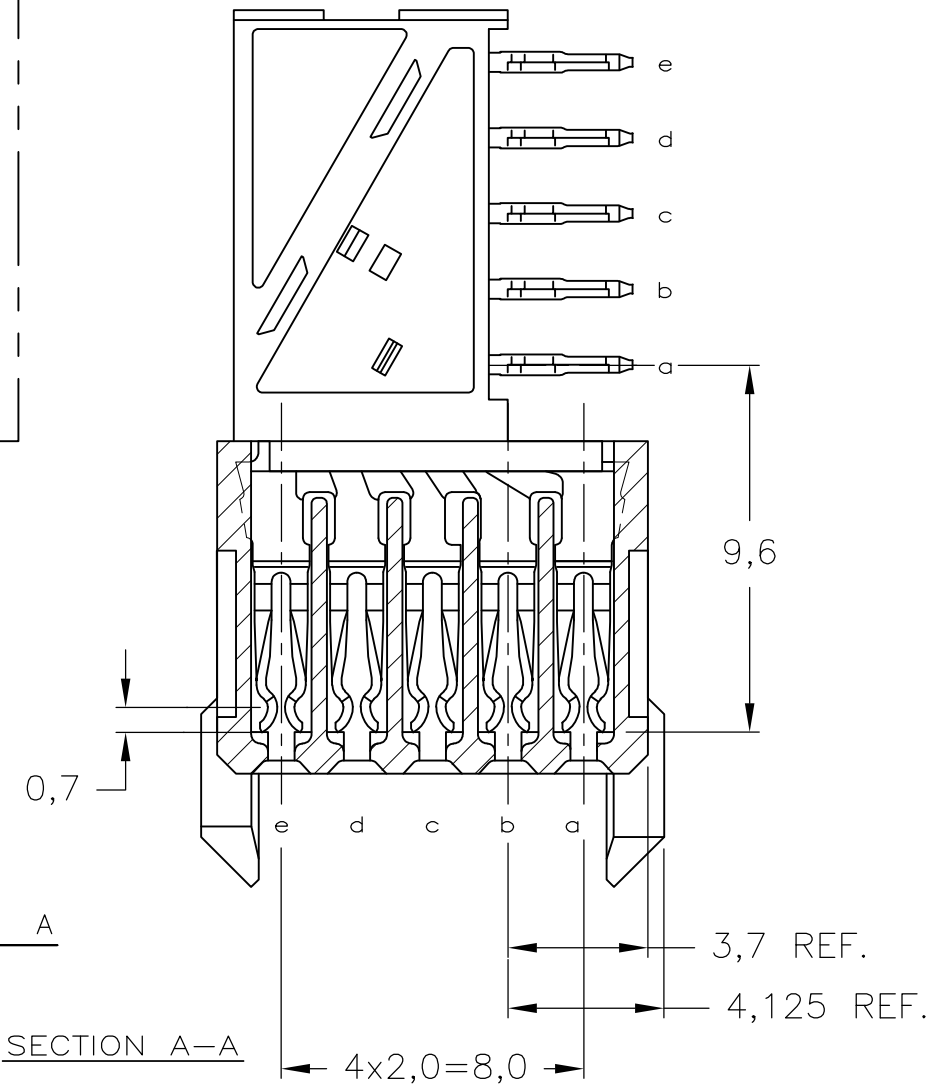


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		E	ECO-12-003005	22FEB2012	SY	MQW

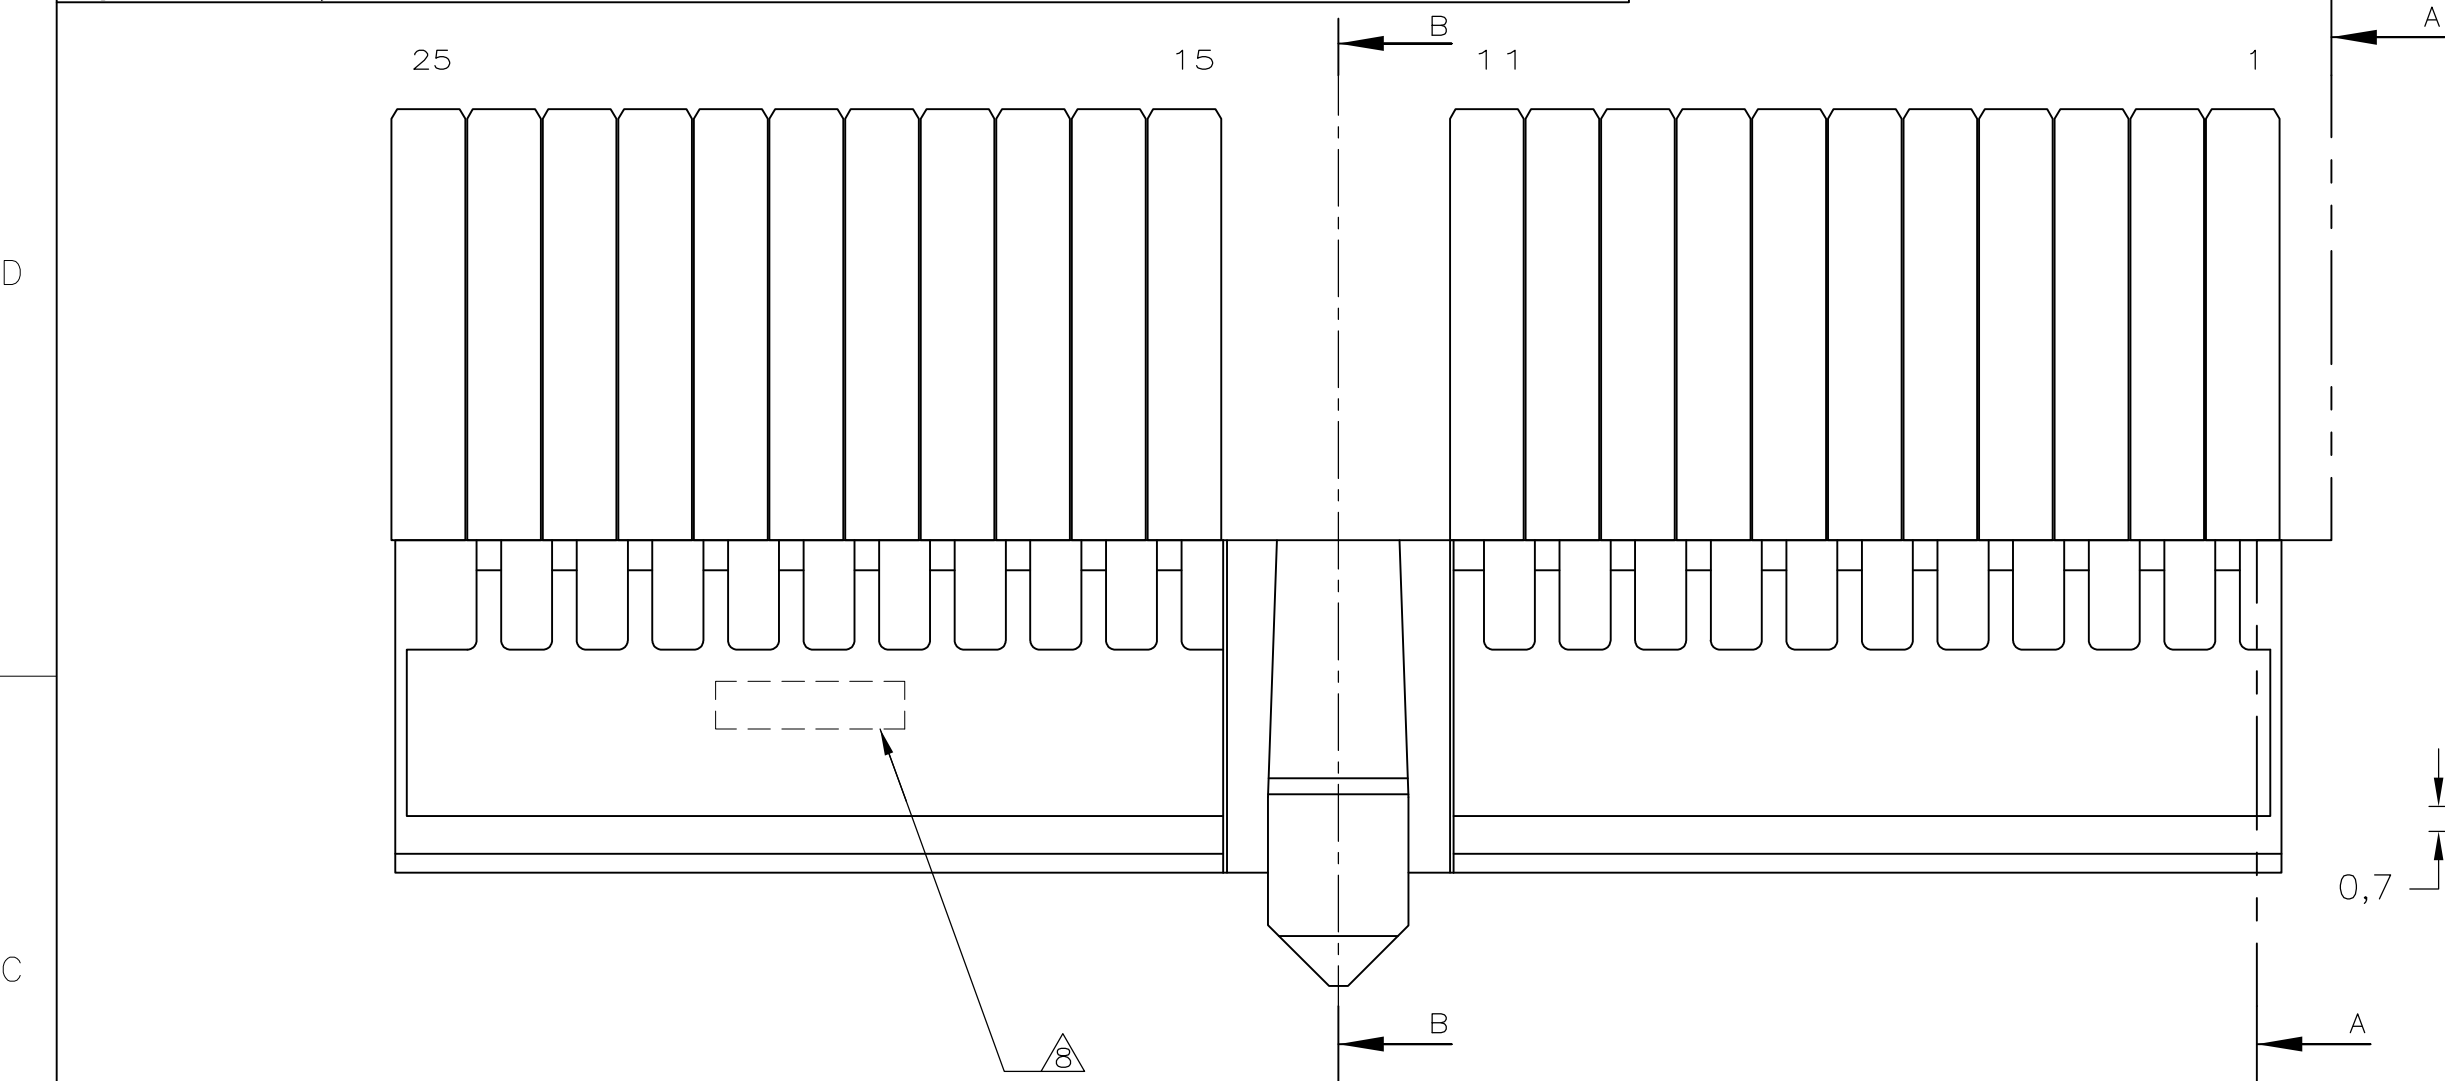

- NOTES:**
- MATERIAL CONTACT; PHOSPHORBRONZE
 - MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY) UL-RATING 49V0
 - GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
 - CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
 - CONNECTOR MARKED WITH PARTNUMBER AND DATECODE. THE MARKING CAN APPEAR ON THE FRONT SIDE OR ON THE BACK SIDE.
 - PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID. 110 HOLES.
 - FITS WITH INTEGRATED GROUND RETURN UPPERSHIELD, BASIC P.N. 5338107 AND INTEGRATED GROUND RETURN LOWERSHIELD, BASIC P.N. 5338108
 - AREA RESERVED FOR CODING KEY, BASIC P.N. 100526
 - CONNECTOR ASSEMBLED WITH ALTERNATE FEMALE CONTACTS.
 - 0.76µm MIN. GOLD PLATING AT MATING SURFACES.

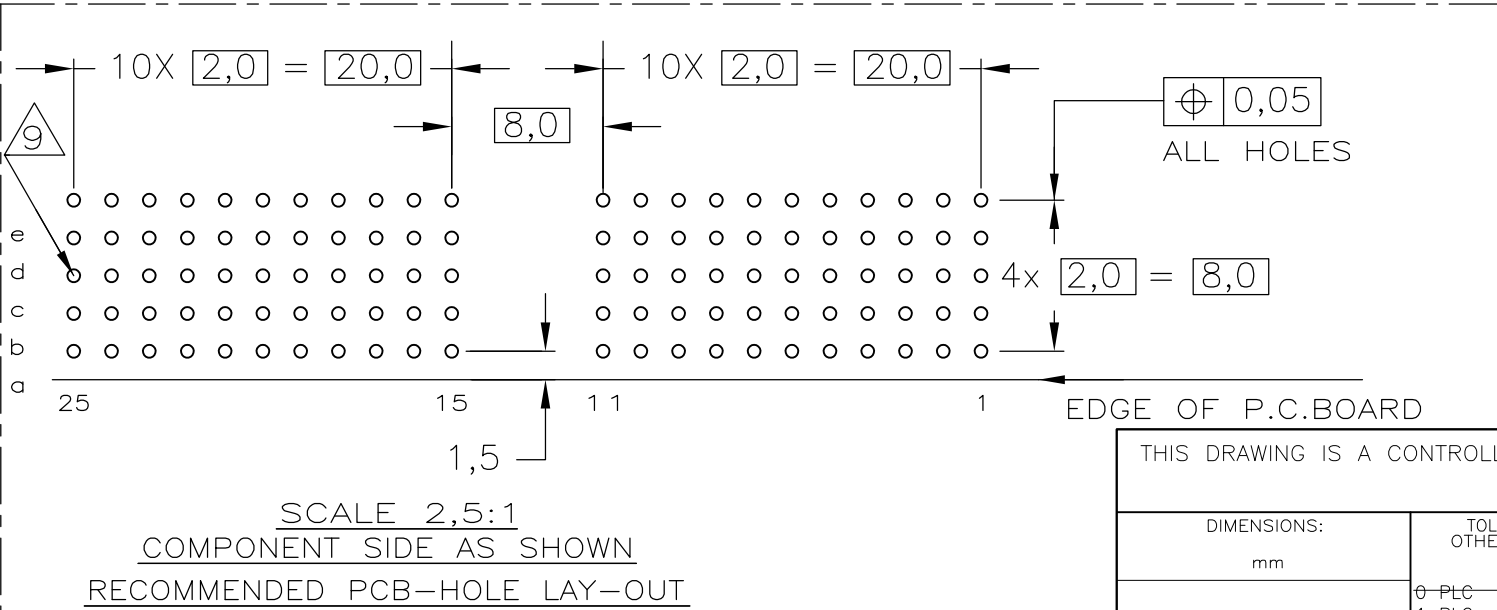

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

$\Delta 3 \Delta 3$	$\Delta 1$	3-5100147-0	$\Delta 2$
$\Delta 6 \Delta 1$	$\Delta 1$	1-5100147-9	$\Delta 2$
$\Delta 5 \Delta 1$	$\Delta 1$	5100147-9	$\Delta 2$
$\Delta 4$	$\Delta 1$	5100147-4	$\Delta 2$
$\Delta 3$	$\Delta 1$	5100147-1	$\Delta 2$
FINISH	MATERIAL	PARTNUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	05AUG2004
		CHK	22SEP2004
		APVD	22SEP2004
		PRODUCT SPEC	
		APPLICATION SPEC	
		WEIGHT	
		CUSTOMER DRAWING	

K.N.KIRAN		TE Connectivity	
B.MOOIJ		Z-PACK 2mm HM TYPE A	
B.MOOIJ		110 POS. FEMALE CONNECTOR	
108-19082			
114-19029			
A2		C=5100147	
00779		1 of 1	
5:1		REV E	