

AC - DC DIN Rail Mountable Power Supply **multicomp**PRO

RoHS
Compliant



Features

- Universal Input 85V AC to 264V AC
- Short Circuit Protection
- Internal Input Filter
- 3 years warranty

Model List

Model No.	Input Voltage	Output Wattage	Output Voltage	Output Current	EFF. (Min.)	EFF. (Typ.)
Single Output Models						
MP-DRAN30-12	85 ~ 264V AC	30 WATTS	+12V DC	2.5A	82%	84%
MP-DRAN30-24			+24V DC	1.24A	83%	86%
MP-DRAN30-48			+48V DC	0.625A		
MP-DRAN60-05		50 WATTS	+5V DC	10A	77%	79%
MP-DRAN60-12		60 WATTS	+12V DC	5A	84%	86%
MP-DRAN60-24			+24V DC	2.5A	86%	89%
MP-DRAN60-48			+48V DC	1.25A		

Specification

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

General

Characteristics	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency	Vi nom, Io nom	55		135	kHz
Isolation Voltage	Input - Output	3,000 / 4,242			V AC / V DC
	Input-FG	1,500 / 2,121			
	Output-FG	500 / 710			
Isolation Resistance	Input- Output, @ 500V DC	100			MΩ
Ambient Temperature	Operating at Vi nom	-40		+71	°C
Derating (see Derating curve)	Vi nom, from +61°C to +71°C			2.5	% / °C
Storage Temperature	Non operational	-40		+85	°C
Relative Humidity	Vi nom, Io nom	20		95	% RH
Temperature Coefficient	Vi nom, Io min			±0.03	% / °C

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

AC - DC DIN Rail Mountable Power Supply **multicomp**PRO

Characteristics	Conditions	Min.	Typ.	Max.	Unit
MTBF	MP-DRAN30 12V			640000	Hours
	Bellcore Issue 6 @40°C, GB 24V			665000	
	48V			675000	
	MP-DRAN60 5V			532000	
	Bellcore Issue 6 @40°C, GB 12V			556000	
	24V			580000	
	48V			596000	
Altitude During Operation	EN 62368-1			5,000	m
Dimension	Spring terminal type	L90 × W40.5 × D114			mm
Cooling	Free air convection				
Installation Position	Vertical (other direction may derating using)				
Pollution Degree		2			

Input Specifications

Characteristics	Conditions	Min.	Typ.	Max.	Unit
Rated input voltage	Io nom	100		240	V AC
Absolute input max. Range	Ta min ... Ta max, AC in	85		264	V AC
	Io nom DC in	90		375	V AC
Input Current	Vi : 115 / 230 V AC, Io nom MP-DRAN30-XX		560 / 330		mA
	Vi : 85V AC, Io nom MP-DRAN60-XX MP-DRAN30 / 60		1,060 / 590	800 / 1,500	
Line Frequency	Vi nom, Io nom	47		63	Hz
Inrush current	Vi : 115 / 230V AC , Io nom MP-DRAN30-XX MP-DRAN60-XX			20 / 40 30 / 60	A
Power Dissipation	Vi : 230 VAC, Io nom 5V		8.5 / 12.5		W
	12V		5.6 / 9		
	24V		5.5 / 8.8		
	48V		4.9 / 7.8		
Leakage Current	Input-Output			0.25	mA
	Input-FG			3.5	mA

Output Specifications

Characteristics	Conditions	Min.	Typ.	Max.	Unit
Output voltage accuracy (Adjusted before shipment)	Vi nom, Io max	0		+1	%
Minimum Load	Vi nom	0			
Line Regulation	Io nom, Vi min ...Vi max			±0.5	
Load Regulation	Vi nom, Io min ...Io nom				
Voltage trim Range	MP-DRAN30 & MP-DRAN60 Series	5V	5	5.5	V DC
	Vi nom, 0.8 Io nom	12V	12	14	
		24V	24	28	
		48V	48	55	

AC - DC DIN Rail Mountable Power Supply **multicomp**PRO

Characteristics	Conditions	Min.	Typ.	Max.	Unit
Rated continuous loading	MP-DRAN30 series Vi nom 12V 24V 48V	2.5A @ 12V DC / 2.1A @ 14V DC 1.25A @ 24V DC / 1.05A @ 28V DC 0.625A @ 48V DC / 0.54A @ 55V DC			
	MP-DRAN60 series Vi nom 5V 12V 24V 48V	10A @ 5V DC / 9A @ 5.5V DC 5A @ 12V DC / 4.25A @ 14V DC 2.5A @ 24V DC / 2.1A @ 28V DC 1.25A @ 48V DC / 1.08A @ 55V DC			
Hold up Time	Vi : 115 / 230 V AC , Io nom	20 / 30			ms
Turn on Time	Vi nom, Io nom Vi nom, Io nom →with Capacitor load			2,000 2,000	ms
Rise Time	Vi nom, Io nom Vi nom, Io nom →with Capacitor load		150 500		ms
Fall Time	Vi nom, Io nom			150	ms
Transient Recovery Time	Vi nom, 1 to 0.5 Io nom			2	ms
Ripple & Noise	Vi nom, Io nom, BW = 20MHz			50	mV
Power Back Immunity	MP-DRAN30 & MP-DRAN60 Series Vi nom, Io nom 1 second 5V 12V 24V 48V	7.5 18 35 63			V DC
Capacitor Load	Vi nom, Io nom MP-DRAN30 / 60			3,500 / 7,000	µF
DC ON indicator threshold at start up (Green LED)	Vi nom, Io nom 5V 12V 24V 48V	3.5 9.0 18 37		4.5 10.8 21.6 43	V DC
Efficiency	Vi nom, Io nom, Po / Pi	Up to 89%, See model list and typ efficiency curve			

Control and Protection

Characteristics	Conditions	Min.	Typ.	Max.	Unit
Input fuse		T2A / 250V AC internal			
Internal surge voltage protection	IEC 61000-4-5	Varistor			
Rated over load protection	Vi nom (see typ current limited curve)	110		150	%
Power Rdy (for 24V model only)	Threshold voltage of contact closed (at start up)	18.8		19.6	V DC
Over voltage protection	Vi nom, 0.8 Io nom (Auto Recovery) 5V 12V 24V 48V	6 15 30 60		6.8 16.5 33 66	V DC
Output short circuit		Fold forward			
Degree of protection		IP20			

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

AC - DC DIN Rail Mountable Power Supply **multicomp**PRO


Approvals and Standards

UL / cUL	UL 508 Listed UL 60950-1, UL 1310 Class 2 Power (only 5V and DRAN60-12(A) w/o Class 2) Recognized ISA 12.12.01(Class I, Division 2, Groups A, B, C and D)
TUV	EN 62368-1 EN 61558-1, EN 61558-2-16 (meet EN 60204-1)
cTUVus	UL 62368-1
CE	EN 61000-6-3, EN 55032 Class B, EN 61000-3-2, EN 61000-3-3 EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3 EN 61000-4-4 Level 4, EN 61000-4-5 L-N Level 3, L / N-FG Level 4 EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11 ENV 50204 Level 2, EN 61204-3
CCC	GB4943.1, GB9254, GB17625.1
Vibration resistance	meet IEC 60068-2-6 (Mounting on rail : 10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 Faces, 3 times for each Face)

Physical Characteristics

Case Size	90mm × 40.5mm × 114mm (3.6 inches × 1.59 inches × 4.49 inches)
Case Material	Plastic
Weight	MP-DRAN30-XX : 270 g MP-DRAN60-XX : 340 g

Mechanism & Pin Configuration

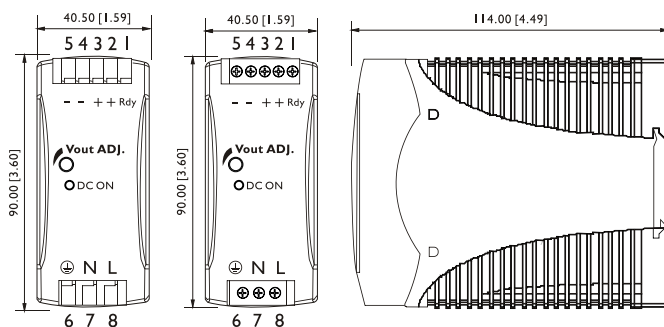

Construction

Easy snap-on mounting onto the DIN-Rail (TS35/7.5 or TS35/15), unit sits safely and firmly on the rail.

Installation

Ventilation / Cooling Normal convection

All sides 25mm free space For cooling recommended Connector size range

Spring terminal:

AWG 24-14 (0.2~2mm²) flexible / solid cable, 10 m/m stripping at cable end recommends

Screw terminal:

AWG26-12 (0.2~2.5mm²) flexible / solid cable, connector can withstand torque at maximum 5 pound-inches

4-5m/m stripping at cable end recommends Use Copper Conductors only, 60/75°C

General Tolerance

0[0.00] - 30[1.18]	±0.3[0.01]
30[1.18] - 120[4.72]	±0.5[0.02]

Dimensions : Millimetres (Inches)

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro


multicompPRO

AC - DC DIN Rail Mountable Power Supply **multicomp**PRO


Pin Assignment

Pin No.	Designation	Description
1	Out	RDY
2		+
3		+
4		-
5		-
6	In	⊕
7		N
8		L
	Other	Vout ADJ
		DC ON


Fig. 1 Rdy connection

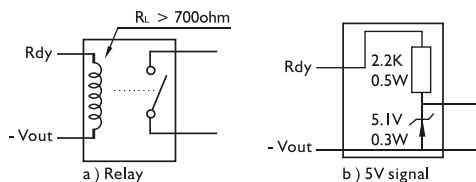


Circuit Schematic

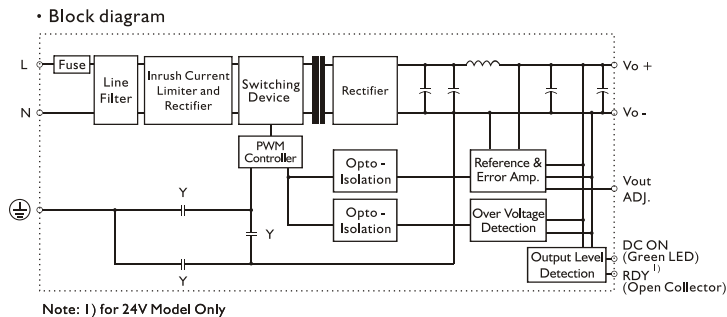



Typ. Current Limited Curve

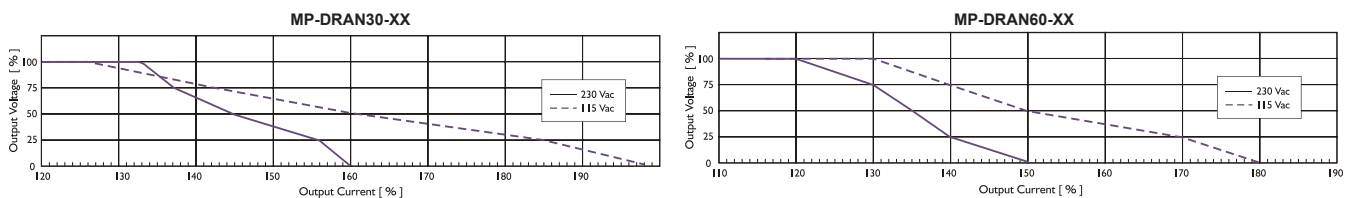

Derating Curve

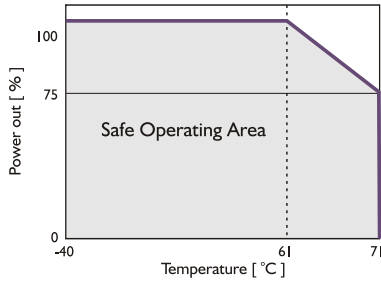

TYP. Efficiency Curve

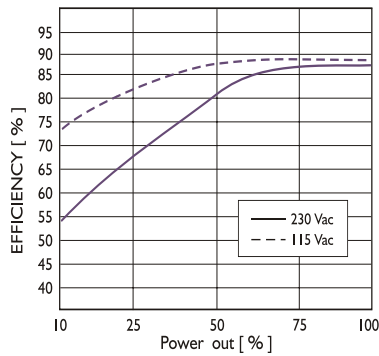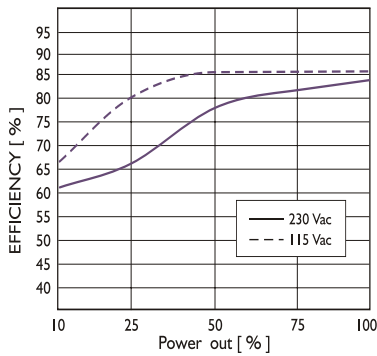

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.