

PhotoMOS

HE DIP6 1 Form A



Product Catalog

"PhotoMOS", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Holdings Corporation.
Recognized in Japan, the United States, all member states of European Union and the other countries.

**IN Your
Future**

HE DIP6 1 Form A

In the series, capable of Max.3.5 A high capacity load current control and Max. 1,500 V high voltage control



(Unit: mm)

FEATURES

- Load voltage 30 V, 40 V, 60 V, 100 V, 200 V, 250 V, 400 V, 600 V, 1,000 V and 1,500 V types available
- Continuous load current: High capacity of Max. 3.5 A (A QV251G, A QV252G3)
- High I/O isolation voltage type available

TYPICAL APPLICATIONS

- Measuring instrument market
Testers etc.
- Industrial machinery and equipment
- Security and disaster prevention market
- Data communication equipment

Note) This product is not for automotive use.
Please contact our sales representative for automotive applications.

TYPES

● Standard type

Category	I/O isolation voltage	Output rating*1		Part No.			Packing quantity	
		Load voltage	Load current	Through hole terminal	Surface mount terminal		Tube	Tape and reel
				Tube packing style	Tube packing style	Tape and reel packing style X*2		
AC/DC dual use	1,500 V rms	40 V	500 mA	AQV251	AQV251A	AQV251AX	1-tube : 50 pcs. Outer carton: 500 pcs.	1-reel : 1,000 pcs. Outer carton: 1,000 pcs.
		60 V	400 mA	AQV252	AQV252A	AQV252AX		
		100 V	350 mA	AQV255	AQV255A	AQV255AX		
		200 V	250 mA	AQV257	AQV257A	AQV257AX		
		250 V	200 mA	AQV253	AQV253A	AQV253AX		
		400 V	150 mA	AQV254	AQV254A	AQV254AX		
		1,000 V	30 mA	AQV259	AQV259A	AQV259AX		
		1,500 V	20 mA	AQV258	AQV258A	AQV258AX		
	5,000 V rms (High insulation)	250 V	200 mA	AQV253H	AQV253HA	AQV253HAX		
		400 V	150 mA	AQV254H	AQV254HA	AQV254HAX		
		600 V	130 mA	AQV256H	AQV256HA	AQV256HAX		

Note) The surface mount terminal shape indicator " A " and the packing style indicator " X " are not marked on the device.
(Ex. the label for product number AQV251AX is AQV251.)

*1: Indicate the peak AC and DC values.

*2: Tape and reel packing style X: picked from the 1/2/3-pin side. For part numbers with picked from the 4/5/6-pin side, change the " X " at the end to " Z " when ordering.

PhotoMOS HE DIP6 1 Form A

● High capacity type

Category	Output rating*		Part No.			Packing quantity	
	Load voltage	Load current	Through hole terminal	Tape and reel packing style 1Y	Surface mount terminal	Tube	Tape and reel
			Tube packing style	Tube packing style	Tape and reel packing style X*2		
AC/DC dual use	30 V	3.5 A	AQV251G	AQV251GA	AQV251GAX	1-tube : 50 pcs. Outer carton: 500 pcs.	1-reel : 1,000 pcs. Outer carton: 1,000 pcs.
	60 V	2.5 A	AQV252G	AQV252GA	AQV252GAX		
	60 V	3.5 A	AQV252G3	AQV252G3A	AQV252G3AX		
	100 V	2.4 A	AQV255G3	AQV255G3A	AQV255G3AX		

Note) The surface mount terminal shape indicator "A" and the packing style indicator "X" are not marked on the device.

(Ex. the label for product number AQV251GAX is AQV251G.)

*1: Indicate the peak AC and DC values.

*2: Tape and reel packing style X: picked from the 1/2/3-pin side. For part numbers with picked from the 4/5/6-pin side, change the "X" at the end to "Z" when ordering.

RATING

■ Absolute maximum ratings (Ambient temperature: 25°C)

● Standard type

Item		Symbol	Type of connection	AQV251 (A)	AQV252 (A)	AQV255 (A)	AQV257 (A)	AQV253 (A)	AQV254 (A)	AQV259 (A)	AQV258 (A)	AQV253H (A)	AQV254H (A)	AQV256H (A)	Remarks
Input	LED forward current	I _F	—	50 mA											
	LED reverse voltage	V _R	—	5 V											
	Peak forward current	I _{FP}	—	1 A											f = 100 Hz, Duty Ratio = 0.1 %
	Power dissipation	P _{in}	—	75 mW											
Output	Load voltage (peak AC)	V _L	—	40 V	60 V	100 V	200 V	250 V	400 V	1,000 V	1,500 V	250 V	400 V	600 V	
	Continuous load current	I _L	A	0.5 A	0.4 A	0.35 A	0.25 A	0.2 A	0.15 A	0.03 A	0.02 A	0.2 A	0.15 A	0.13 A	A connection: Peak AC, DC
			B	0.7 A	0.6 A	0.45 A	0.35 A	0.3 A	0.18 A	0.04 A	0.025 A	0.3 A	0.18 A	0.14 A	B, C connection: DC
			C	1.0 A	0.8 A	0.70 A	0.5 A	0.4 A	0.25 A	0.05 A	0.04 A	0.4 A	0.25 A	0.16 A	
	Peak load current	I _{peak}	—	1.8 A	1.5 A	1.0 A	0.75 A	0.6 A	0.5 A	0.09 A	0.06 A	0.6 A	0.5 A	0.4 A	A connection: 100 ms (1 shot) , V _L = DC
Power dissipation	P _{out}	—	360 mW												
Total power dissipation		P _T	—	410 mW											
I/O isolation voltage		V _{iso}	—	1,500 V rms								5,000 V rms			
Ambient temperature (Operating)		T _{opr}	—	—40 to + 85 °C											(Avoid icing and condensation)
Ambient temperature (Storage)		T _{stg}	—	—40 to +100 °C											
Junction temperature		T _j	—	125 °C											

PhotoMOS HE DIP6 1 Form A

● High capacity type

Item		Symbol	Type of connection	AQV251G (A)	AQV252G (A)	AQV252G3 (A)	AQV255G3 (A)	Remarks
Input	LED forward current	I_F	—	50 mA				
	LED reverse voltage	V_R	—	5 V				
	Peak forward current	I_{FP}	—	1 A				$f = 100 \text{ Hz}$, Duty Ratio = 0.1 %
	Power dissipation	P_{IN}	—	75 mW				
Output	Load voltage (peak AC)	V_L	—	30 V	60 V	60 V	100 V	
	Continuous load current	I_L	A	3.5 A	2.5 A	3.5 A	2.4 A	A connection: Peak AC, DC
			B	4.0 A	3.5 A	5.0 A	3.2 A	B, C connection DC
			C	6.0 A	5.0 A	7.0 A	4.8 A	
	Peak load current	I_{peak}	—	6.0 A		10 A	7.0 A	100 ms (1 shot) , $V_L = \text{DC}$ at A connection
	Power dissipation	P_{out}	—	600 mW				Peak AC, DC
	Total power dissipation	P_T	—	650 mW				
I/O isolation voltage		V_{iso}	—	1,500 V rms				
Ambient temperature (Operating)		T_{opr}	—	-40 to + 85 °C				(Avoid icing and condensation)
Ambient temperature (Storage)		T_{stg}	—	-40 to +100 °C				
Junction temperature		T_j	—	125°C				


PhotoMOS HE DIP6 1 Form A

■ Electrical characteristics (Ambient temperature: 25 °C)

● Standard type

Item			Symbol	Type of connection	AQV251 (A)	AQV252 (A)	AQV255 (A)	AQV257 (A)	AQV253 (A)	AQV254 (A)	AQV259 (A)	AQV258 (A)	AQV253H (A)	AQV254H (A)	AQV256H (A)	Condition
Input	LED operate current	Typical	I _{Fon}	—	0.9 mA								1.4 mA			I _L = Max.
		Maximum			3.0 mA											
	LED turn off current	Minimum	I _{Foff}	—	0.4 mA											I _L = Max.
		Typical			0.8 mA								1.3 mA			
	LED dropout voltage	Typical	V _F	—	1.25 V (1.14 V at I _F = 5 mA)											I _F = 50 mA
Maximum		1.5 V														
Output	On resistance	Typical	R _{on}	A	0.6 Ω	0.74 Ω	1.8 Ω	2.6 Ω	5.5 Ω	12.4 Ω	85 Ω	345 Ω	5.5 Ω	12.4 Ω	20 Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum			1 Ω	1.4 Ω	2.5 Ω	4 Ω	8 Ω	16 Ω	200 Ω	500 Ω	8 Ω	16 Ω	30 Ω	
		Typical	R _{on}	B	0.3 Ω	0.37 Ω	0.9 Ω	1.4 Ω	2.7 Ω	6.2 Ω	60 Ω	345 Ω	2.7 Ω	6.2 Ω	15 Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum			0.5 Ω	0.7 Ω	1.25 Ω	2 Ω	4 Ω	8 Ω	100 Ω	500 Ω	4 Ω	8 Ω	20 Ω	
		Typical	R _{on}	C	0.15 Ω	0.18 Ω	0.45 Ω	0.7 Ω	1.4 Ω	3.1 Ω	30 Ω	160 Ω	1.4 Ω	3.1 Ω	7.5 Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum			0.25 Ω	0.35 Ω	0.63 Ω	1 Ω	2 Ω	4 Ω	50 Ω	250 Ω	2 Ω	4 Ω	10 Ω	
	Off state leakage current	Maximum	I _{Leak}	—	1 μA							10 μA	1 μA		I _F = 0 mA V _L = Max.	
Transfer characteristics	Turn on time*	Typical	T _{on}	—	1.7 ms	1.4 ms	0.9 ms	1.5 ms	0.8 ms		0.6 ms	0.35 ms	2.4 ms	1.8 ms	1.2 ms	I _F = 5 mA I _L = Max.
		Maximum			3 ms		2 ms	3 ms	2 ms		1 ms		4 ms	3 ms		
	Turn off time*	Typical	T _{off}	—	0.07 ms		0.09 ms	0.1 ms	0.06 ms	0.05 ms	0.04 ms		0.06 ms	0.05 ms	0.06 ms	I _F = 5 mA I _L = Max.
		Maximum			0.2 ms											
	I/O capacitance	Typical	C _{iso}	—	1.3 pF											f = 1 MHz V _B = 0 V
		Maximum			3 pF											
Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ											500 V DC	

*Turn on/Turn off time

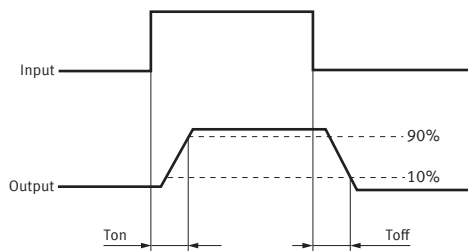


PhotoMOS HE DIP6 1 Form A

● High capacity type

Item			Symbol	Type of connection	AQV251G (A)	AQV252G (A)	AQV252G3 (A)	AQV255G3 (A)	Conditions
Input	LED operate current	Typical	I _{Fon}	—	0.55 mA	0.5 mA			I _L = 100 mA
		Maximum		—	3.0 mA				
	LED turn off current	Minimum	I _{Foff}	—	0.2 mA			I _L = 100 mA	
		Typical		—	0.45 mA		0.4 mA		
	LED dropout voltage	Typical	V _F	—	1.14 V (1.32 V at I _F = 50 mA)		1.32 V (1.14 V at I _F = 5 mA)		AQV251G : I _F = 5 mA AQV252G : I _F = 5 mA AQV252G3: I _F = 50 mA AQV255G3: I _F = 50 mA
		Maximum			1.5 V				
Output	On resistance	Typical	R _{on}	A	0.035 Ω	0.08 Ω	0.033 Ω	0.07 Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum	C _{out}		0.08 Ω	0.12 Ω	0.06 Ω	0.12 Ω	
		Typical	R _{on}	B	0.018 Ω	0.04 Ω	0.017 Ω	0.035 Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum	C _{out}		0.04 Ω	0.06 Ω	0.04 Ω	0.07 Ω	
		Typical	R _{on}	C	0.01 Ω	0.02 Ω	0.0095 Ω	0.02 Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum	C _{out}		0.02 Ω	0.03 Ω	0.02 Ω	0.04 Ω	
	Off state leakage current	Maximum	I _{leak}	—	1 μA				I _F = 0 mA V _L = Max.
Transfer characteristics	Turn on time*	Typical	T _{on}	—	1.1 ms		1.8 ms		I _F = 5 mA I _L = 100 mA V _L = 10 V
		Maximum		—	5.0 ms				
	Turn off time*	Typical	T _{off}	—	0.1 ms	0.25 ms	0.15 ms		I _F = 5 mA I _L = 100 mA V _L = 10 V
		Maximum		—	0.5 ms				
	I/O capacitance	Maximum	C _{iso}	—	0.8 pF				f = 1 MHz V _B = 0 V
				—	1.5 pF				
	Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ				500 V DC
Max. operating frequency	Maximum	—	—	10 cps	—	2.5 cps		AQV251G, AQV252G: I _F = 5 mA, duty = 50 % V _L × I _L = 100 V · A AQV252G3, AQV255G3: I _F = 5 mA, duty = 50 % I _L = Max, V _L = Max.	

*Turn on/Turn off time

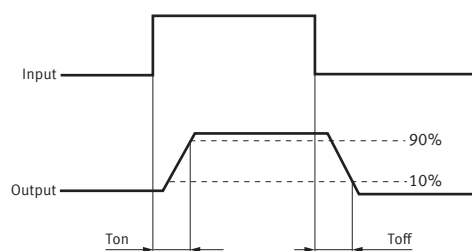

PhotoMOS HE DIP6 1 Form A

■ Recommended operating conditions (Ambient temperature: 25 °C)

Please use under recommended operating conditions to obtain expected characteristics.


Item		Symbol	Min.	Max.	Unit
LED current		I _F	5	30	mA
AQV251 (A)	Load voltage (Peak AC)	V _L	—	32	V
	Continuous load current (A connection)	I _L	—	0.5	A
AQV252 (A)	Load voltage (Peak AC)	V _L	—	48	V
	Continuous load current (A connection)	I _L	—	0.4	A
AQV255 (A)	Load voltage (Peak AC)	V _L	—	80	V
	Continuous load current (A connection)	I _L	—	0.35	A
AQV257 (A)	Load voltage (Peak AC)	V _L	—	160	V
	Continuous load current (A connection)	I _L	—	0.25	A
AQV253 (A)	Load voltage (Peak AC)	V _L	—	200	V
	Continuous load current (A connection)	I _L	—	0.2	A
AQV254 (A)	Load voltage (Peak AC)	V _L	—	320	V
	Continuous load current (A connection)	I _L	—	0.15	A
AQV259 (A)	Load voltage (Peak AC)	V _L	—	800	V
	Continuous load current (A connection)	I _L	—	0.03	A
AQV258 (A)	Load voltage (Peak AC)	V _L	—	1,200	V
	Continuous load current (A connection)	I _L	—	0.02	A
AQV253H (A)	Load voltage (Peak AC)	V _L	—	200	V
	Continuous load current (A connection)	I _L	—	0.2	A
AQV254H (A)	Load voltage (Peak AC)	V _L	—	320	V
	Continuous load current (A connection)	I _L	—	0.15	A
AQV256H (A)	Load voltage (Peak AC)	V _L	—	480	V
	Continuous load current (A connection)	I _L	—	0.13	A
AQV251G (A)	Load voltage (Peak AC)	V _L	—	24	V
	Continuous load current (A connection)	I _L	—	3.5	A
AQV252G (A)	Load voltage (Peak AC)	V _L	—	48	V
	Continuous load current (A connection)	I _L	—	2.5	A
AQV252G3 (A)	Load voltage (Peak AC)	V _L	—	48	V
	Continuous load current (A connection)	I _L	—	3.3	A
AQV255G3 (A)	Load voltage (Peak AC)	V _L	—	80	V
	Continuous load current (A connection)	I _L	—	2.4	A

REFERENCE DATA

● Standard type


1-1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
Type of connection: A

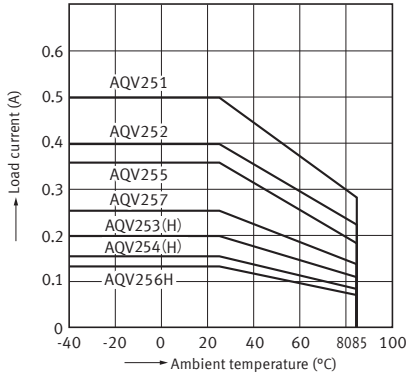


1-2. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
Type of connection: A

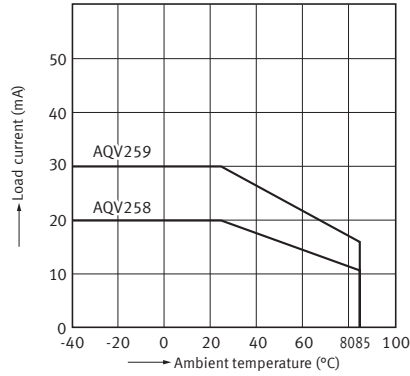


2-1. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA;
Continuous load current: Max. (DC)

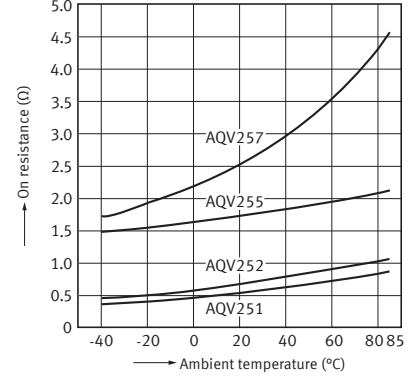


2-2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA;
Continuous load current: Max. (DC)

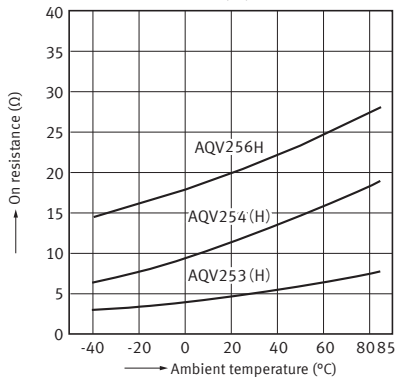


2-3. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA;
Continuous load current: 30 mA (DC)

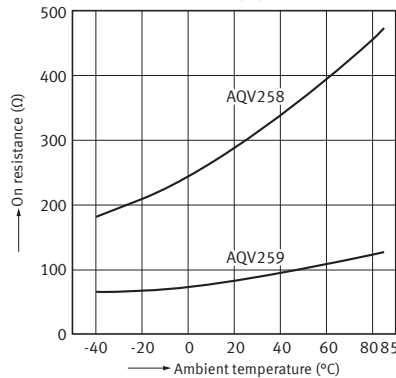


3-1. Turn on time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

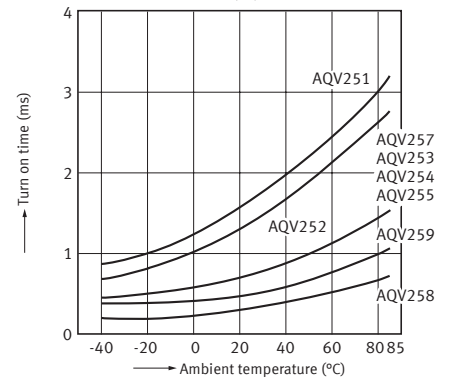


3-2. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

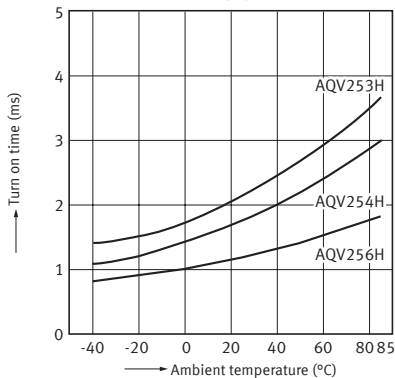


4-1. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

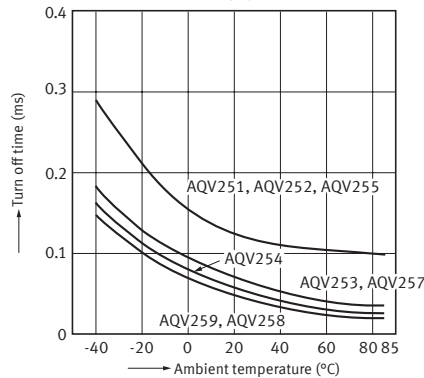


4-2. Turn off time vs. ambient temperature characteristics


LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

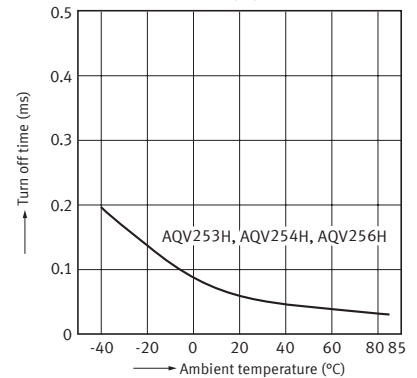


5-1. LED operate current vs. ambient temperature characteristics

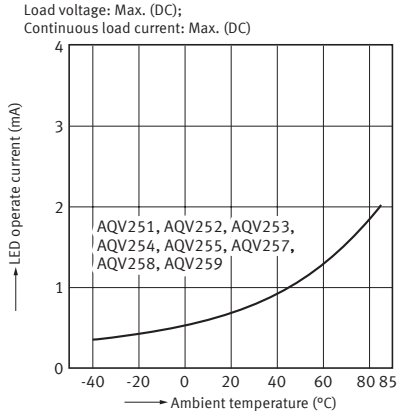


5-2. LED operate current vs. ambient temperature characteristics

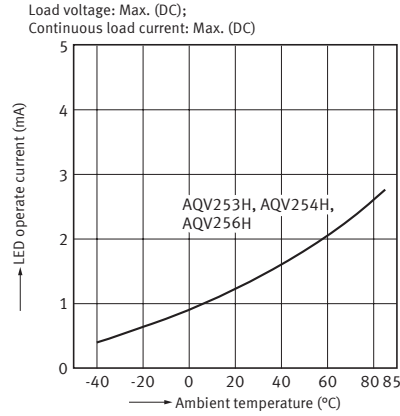


6-1. LED turn off current vs. ambient temperature characteristics

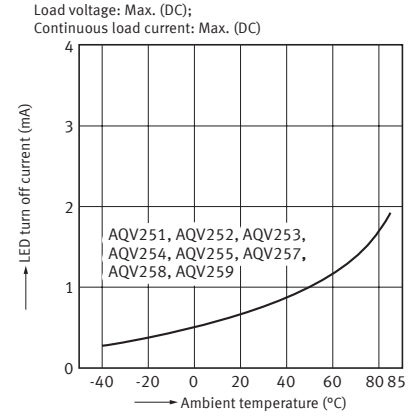


6-2. LED turn off current vs. ambient temperature characteristics

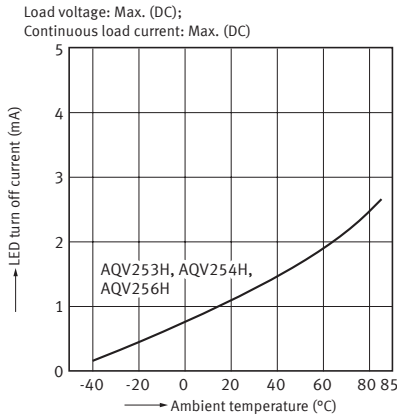


7. LED dropout voltage vs. ambient temperature characteristics

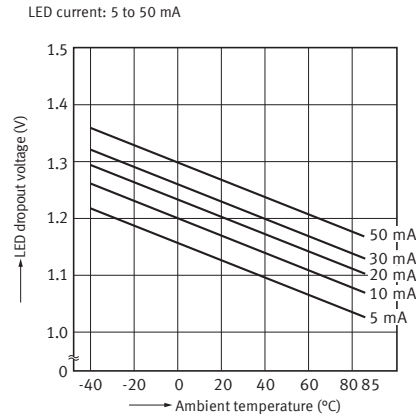


8-1. Current vs. voltage characteristics of output at MOS portion

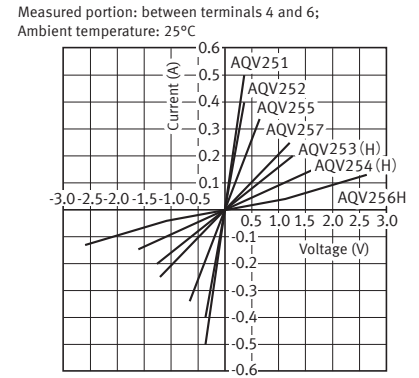


8-2. Current vs. voltage characteristics of output at MOS portion

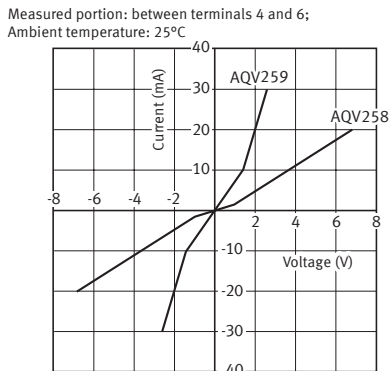

9-1. Off state leakage current vs. load voltage characteristics

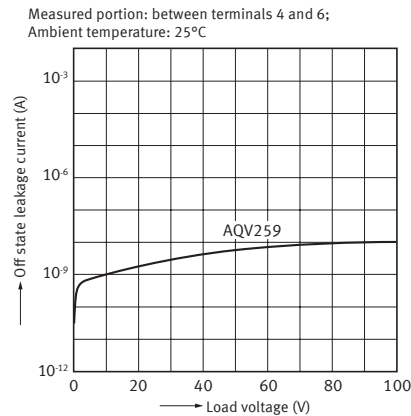


9-2. Off state leakage current vs. load voltage characteristics

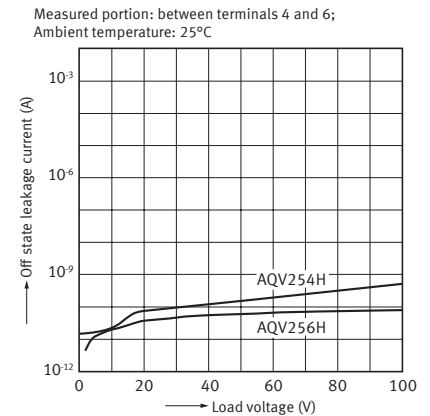


10-1. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C

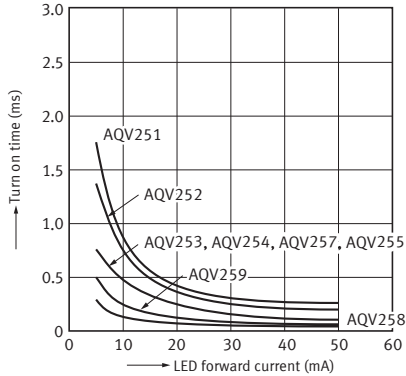


10-2. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C

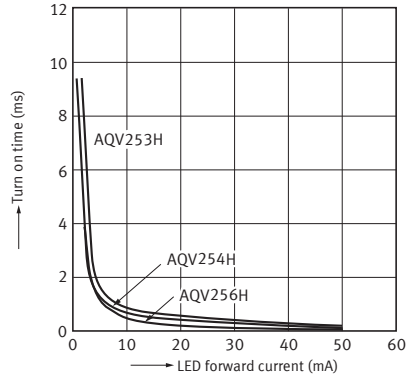


11-1. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C

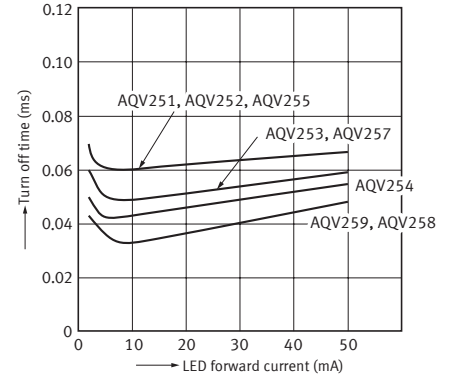


11-2. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C

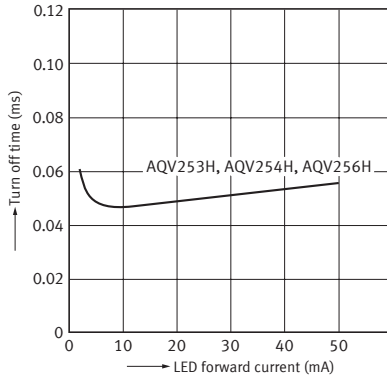


12-1. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C

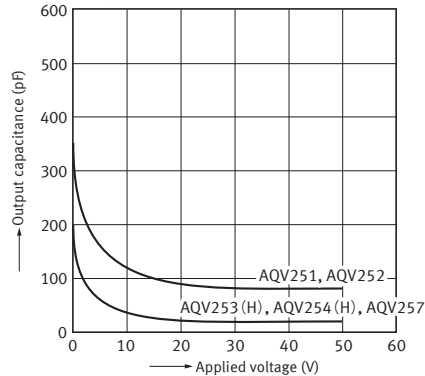

12-2. Output capacitance vs. applied voltage characteristics


Measured portion: between terminals 4 and 6;
Frequency: 1 MHz; Ambient temperature: 25°C

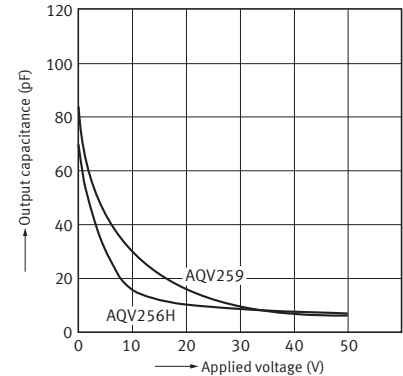

● High capacity type


1-1. Load current vs. ambient temperature characteristics

Tested sample: AQV251G;
Allowable ambient temperature: -40 to +85°C

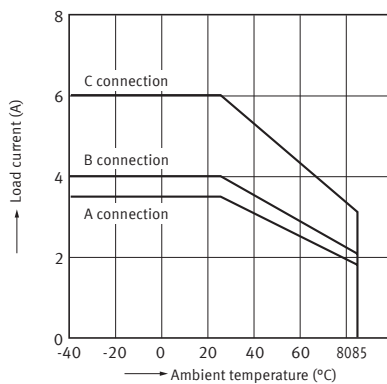


1-2. Load current vs. ambient temperature characteristics

Tested sample: AQV252G;
Allowable ambient temperature: -40 to +85°C

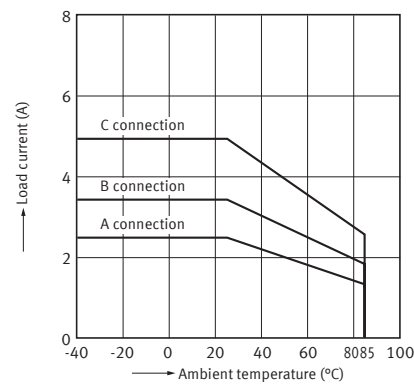

1-3. Load current vs. ambient temperature characteristics


Sample: AQV252G3
Allowable ambient temperature: -40 to +85°C

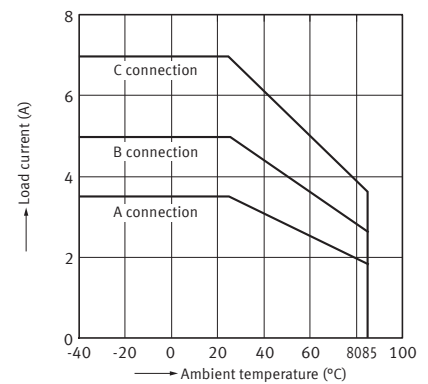

1-4. Load current vs. ambient temperature characteristics


Sample: AQV255G3

Allowable ambient temperature: -40 to +85°C

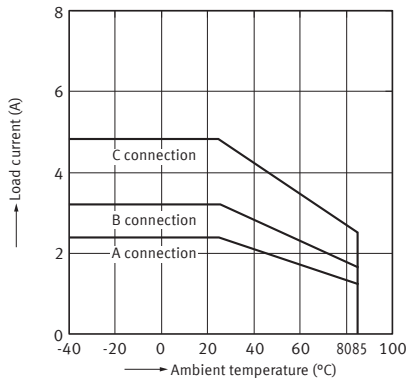


2-1. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max. (DC)

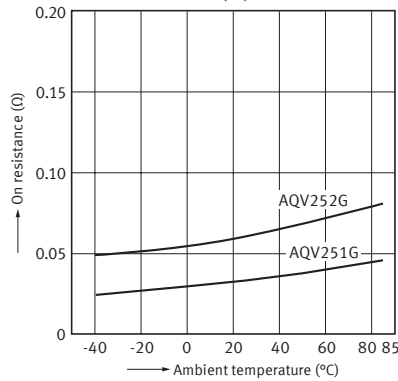


2-2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max. (DC)

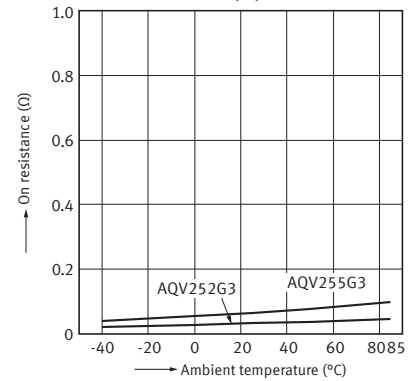


3-1. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage:
10 V (DC); Continuous load current: 100 mA (DC)

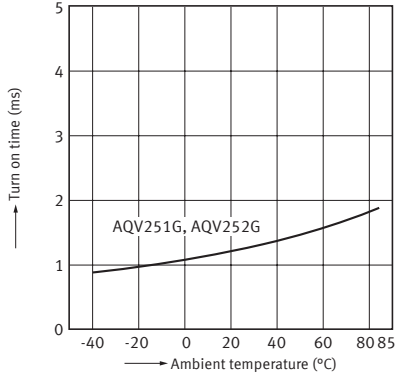


3-2. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

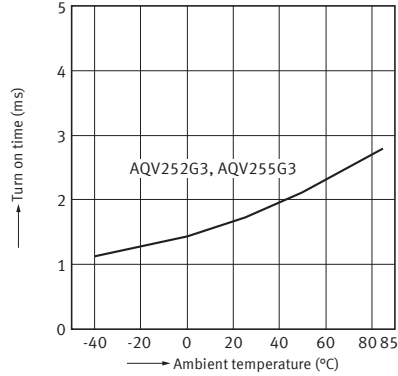


4-1. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

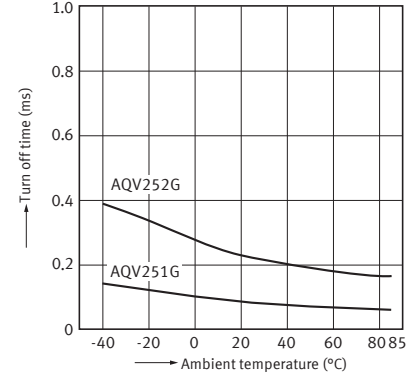


4-2. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

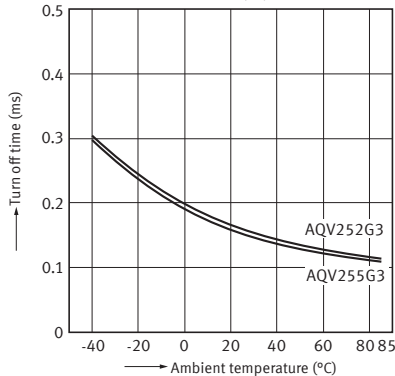


5-1. LED operate current vs. ambient temperature characteristics

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

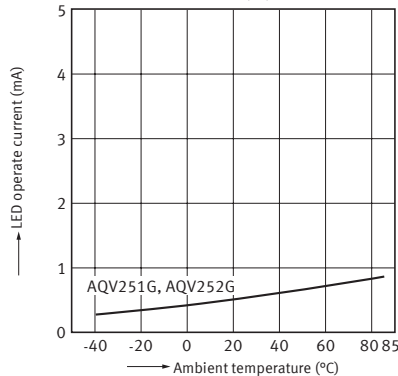

5-2. LED operate current vs. ambient temperature characteristics


Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

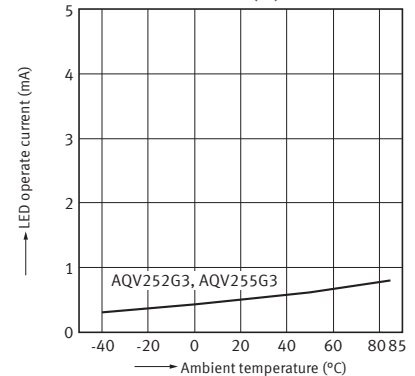

PhotoMOS HE DIP6 1 Form A


6-1. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

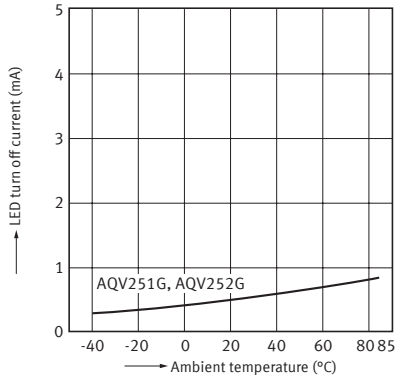


6-2. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

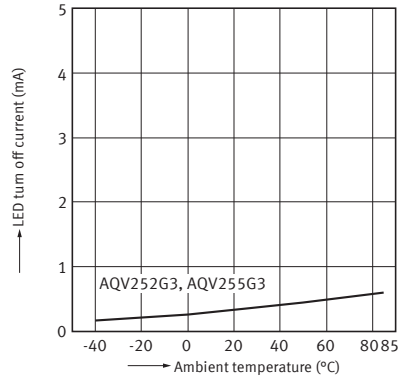


7-1. LED dropout voltage vs. ambient temperature characteristics

Sample: AQV251G, AQV252G
LED current: 5 to 50 mA

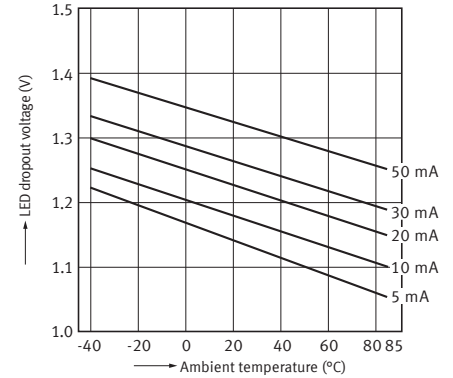


7-2. LED dropout voltage vs. ambient temperature characteristics

Sample: AQV252G3, AQV255G3
LED current: 5 to 50 mA

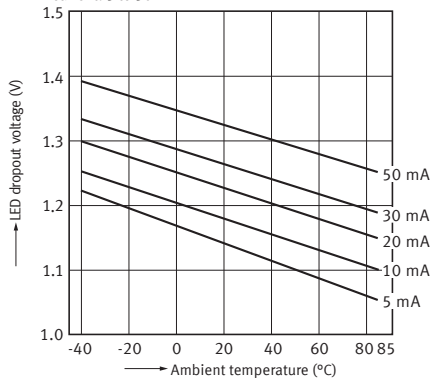


8-1. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C

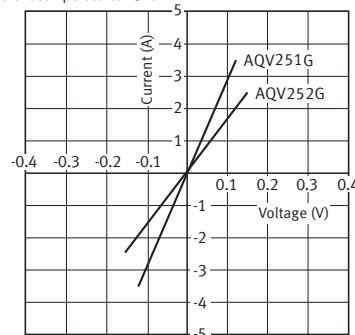


8-2. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C

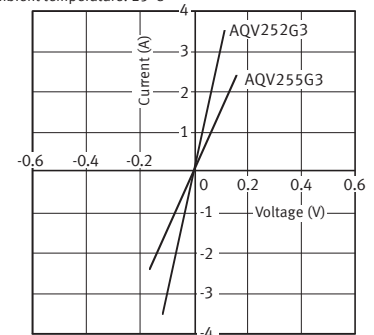


9-1. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C

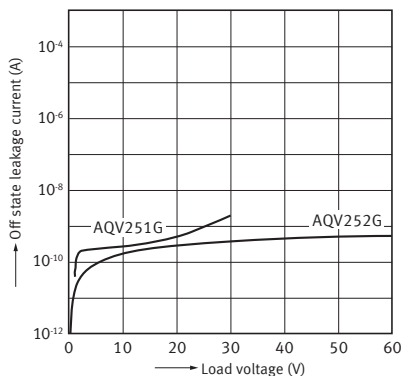


9-2. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C

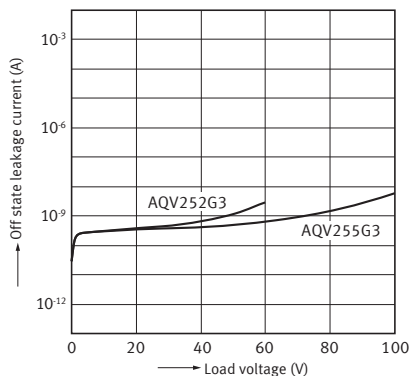


10-1. Turn on time vs. LED forward current characteristics

Measured portion:
between terminals 4 and 6; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C

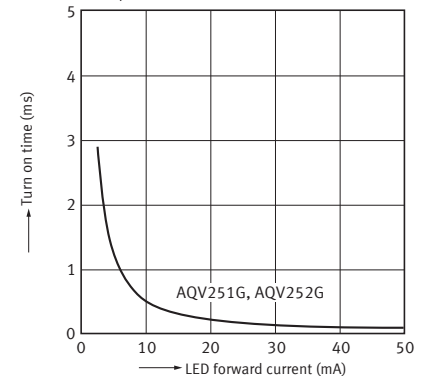


10-2. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C

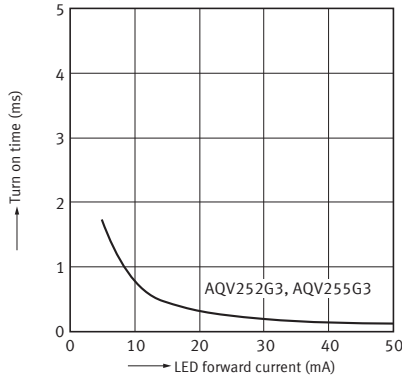


11-1. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C

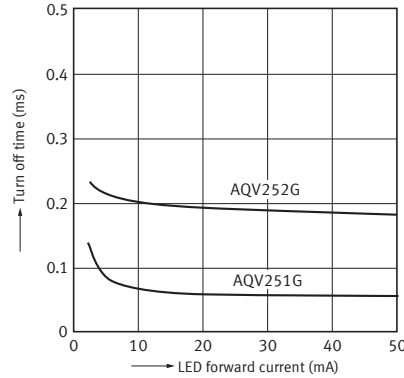


11-2. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C

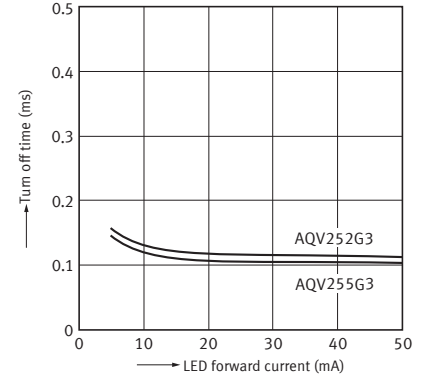


12-1. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz; Ambient temperature: 25°C

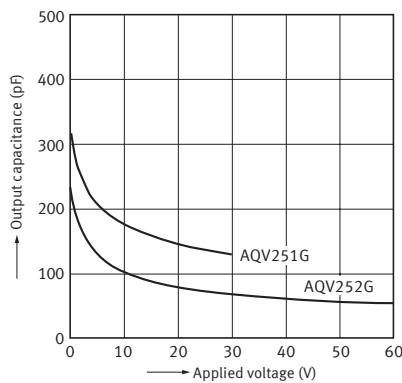


12-2. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz; Ambient temperature: 25°C

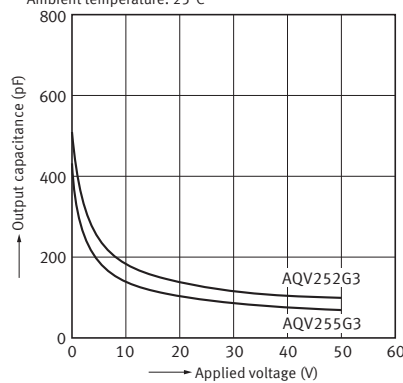


13-1. Max. operating frequency vs. load voltage and load current characteristics

Tested sample: AQV251G;
LED current: 5 mA;
Ambient temperature: 25°C

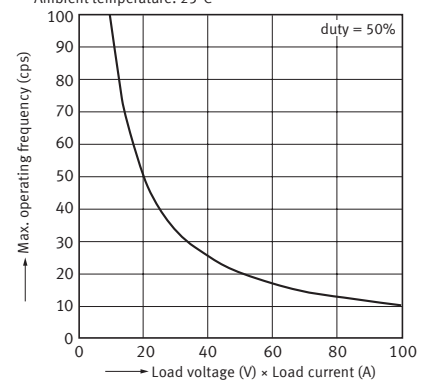

13-2. Max. operating frequency vs. load voltage and load current characteristics


LED current: 5 mA
Ambient temperature: 25°C

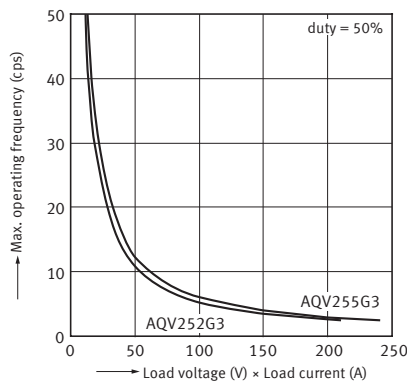






PhotoMOS HE DIP6 1 Form A

DIMENSIONS (Unit: mm)

CAD The CAD data of the products with a " CAD " mark can be downloaded from our Website.

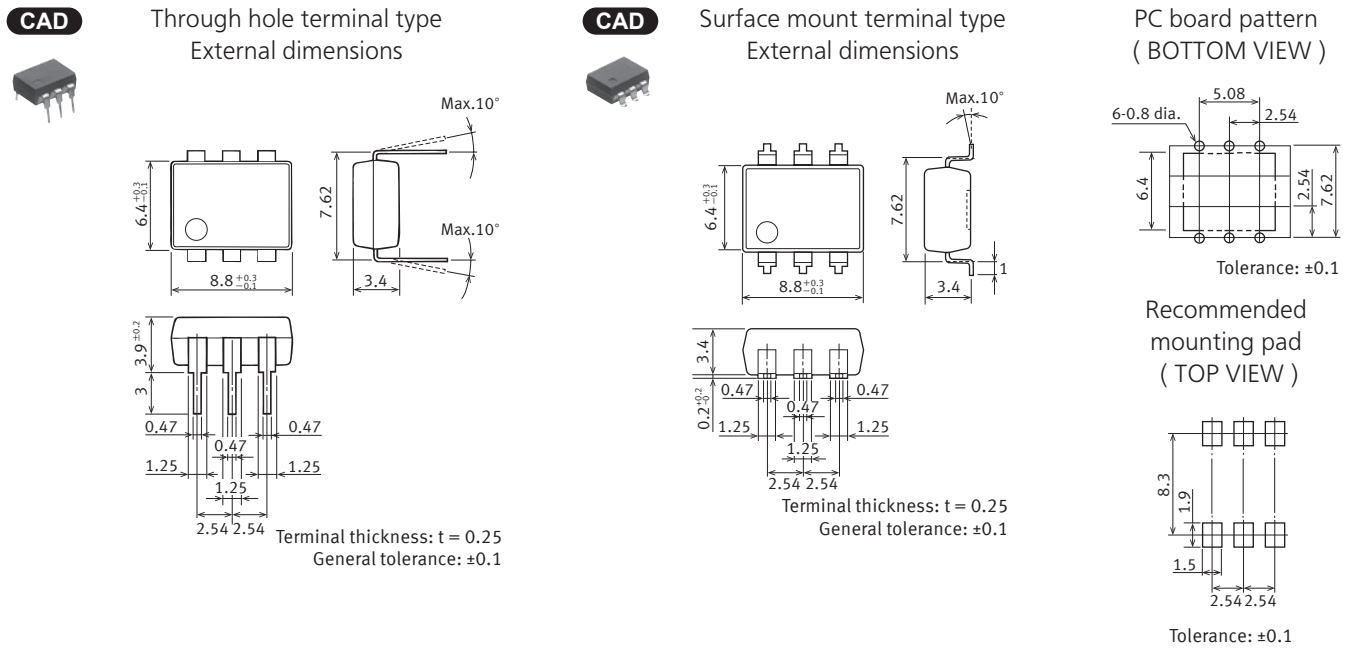

SCHEMATIC AND WIRING DIAGRAMS

Schematic	Output configuration	Load type	Connection	Wiring diagram
	1 Form A	AC/DC	A	
		DC	B	
				
DC	C			

* Terminal 3 cannot be used, since it is in the internal circuit of the device.

SAFETY STANDARDS

Each standard may be updated at any time, so please check our Website for the latest information.

Part No.		UL (Recognized)		BSI (Approved)	
		File No. (Standard No.)	Contact rating	File No. (Standard No.)	Contact rating (Basic insulation)
AC/DC dual use	AQV251 (A)	E191218 (UL1577)	0.5 A 40 V AC (peak) A connection 0.5 A 40 V DC A connection 0.7 A 40 V DC B connection 1.0 A 40 V DC C connection	—	—
	AQV252 (A)		0.4 A 60 V AC (peak) A connection 0.4 A 60 V DC A connection 0.6 A 60 V DC B connection 0.8 A 60 V DC C connection		
	AQV255 (A)		0.35 A 100 V AC (peak) A connection 0.35 A 100 V DC A connection 0.45 A 100 V DC B connection 0.70 A 100 V DC C connection		
	AQV257 (A)		0.25 A 200 V AC (peak) A connection 0.25 A 200 V DC A connection 0.35 A 200 V DC B connection 0.5 A 200 V DC C connection		
	AQV253 (A)		0.2 A 250 V AC (peak) A connection 0.2 A 250 V DC A connection 0.3 A 250 V DC B connection 0.4 A 250 V DC C connection		
	AQV254 (A)		0.15 A 400 V AC (peak) A connection 0.15 A 400 V DC A connection 0.18 A 400 V DC B connection 0.25 A 400 V DC C connection		
	AQV259 (A)		0.03 A 1,000 V AC (peak) A connection 0.03 A 1,000 V DC A connection 0.04 A 1,000 V DC B connection 0.05 A 1,000 V DC C connection		
	AQV258 (A)		0.02 A 1,500 V AC (peak) A connection 0.02 A 1,500 V DC A connection 0.025 A 1,500 V DC B connection 0.04 A 1,500 V DC C connection	CNF802387 (EN62368-1)	0.02 A 1,000 V AC (peak) A connection 0.02 A 1,000 V DC A connection 0.025 A 1,000 V DC B connection 0.04 A 1,000 V DC C connection
	AQV251G (A)		3.5 A 30 V AC (peak) A connection 3.5 A 30 V DC A connection 4.0 A 30 V DC B connection 6.0 A 30 V DC C connection		3.5 A 30 V AC (peak) A connection 3.5 A 30 V DC A connection 4.0 A 30 V DC B connection 6.0 A 30 V DC C connection
	AQV252G (A)		2.5 A 60 V AC (peak) A connection 2.5 A 60 V DC A connection 3.5 A 60 V DC B connection 5.0 A 60 V DC C connection		2.5 A 60 V AC (peak) A connection 2.5 A 60 V DC A connection 3.5 A 60 V DC B connection 5.0 A 60 V DC C connection
	AQV252G3 (A)		3.5 A 60 V AC (peak) A connection 3.5 A 60 V DC A connection 5.0 A 60 V DC B connection 7.0 A 60 V DC C connection		—
	AQV255G3 (A)		2.4 A 100 V AC (peak) A connection 2.4 A 100 V DC A connection 3.2 A 100 V DC B connection 4.8 A 100 V DC C connection		

PhotoMOS HE DIP6 1 Form A

Part No.		UL (Recognized)		BSI (Approved)		
		File No. (Standard No.)	Contact rating	File No. (Standard No.)	Contact rating (Reinforced insulation)	Contact rating (Basic insulation)
AC/DC dual use	AQV253H (A)	E191218 (UL1577)	0.2 A 250 V AC (peak) A connection 0.2 A 250 V DC A connection 0.3 A 250 V DC B connection 0.4 A 250 V DC C connection	CNF802387 (EN62368-1)	0.2 A 250 V AC (peak) A connection 0.2 A 250 V DC A connection 0.3 A 250 V DC B connection 0.4 A 250 V DC C connection	—
	AQV254H (A)		0.15 A 400 V AC (peak) A connection 0.15 A 400 V DC A connection 0.18 A 400 V DC B connection 0.25 A 400 V DC C connection		0.15 A 400 V AC (peak) A connection 0.15 A 400 V DC A connection 0.18 A 400 V DC B connection 0.25 A 400 V DC C connection	
	AQV256H (A)		0.13 A 600 V AC (peak) A connection 0.13 A 600 V DC A connection 0.14 A 600 V DC B connection 0.16 A 600 V DC C connection		0.13 A 520 V AC (peak) A connection 0.13 A 520 V DC A connection 0.14 A 520 V DC B connection 0.16 A 520 V DC C connection	0.13 A 600 V AC (peak) A connection 0.13 A 600 V DC A connection 0.14 A 600 V DC B connection 0.16 A 600 V DC C connection

Please refer to " **the latest product specifications** " when designing your product.

• Requests to customers:

<https://industry.panasonic.com/global/en/salespolicies>

SAFETY WARNINGS

- Do not use the product under conditions that exceed the range of its specifications. It may cause overheating, smoke, or fire.
- Do not touch the recharging unit while the power is on. There is a danger of electrical shock. Be sure to turn off the power when performing mounting, maintenance, or repair operations on the device (including connecting parts such as the terminal board and socket).
- Check the wiring diagrams in the catalog and be sure to connect the terminals correctly. If the device is energized with short circuit or any wrong connection, it may cause unexpected malfunction, abnormal heat or fire.

PhotoMOS® Cautions for Use

■ Derating design

Derating is a significant factor for reliable design and product life. Even if the conditions of use (temperature, current, voltage, etc.) of the product are within the absolute maximum ratings, reliability may be lowered remarkably when continuously used in high load conditions (high temperature, high humidity, high current, high voltage, etc.) Therefore, please derate sufficiently below the absolute maximum ratings and evaluate the device in the actual condition.

Moreover, regardless of the application, if malfunctioning can be expected to pose high risk to human life or to property, or if products are used in equipment otherwise requiring high operational safety, in addition to designing double circuits, that is, incorporating features such as a protection circuit or a redundant circuit, safety testing should also be carried out.

■ Applying stress that exceeds the absolute maximum rating

If the voltage or current value for any of the terminals exceeds the absolute maximum rating, internal elements will deteriorate because of the overvoltage or overcurrent. In extreme cases, wiring may melt, or silicon P/N junctions may be destroyed.

Therefore, the circuit should be designed in such a way that the load never exceed the absolute maximum ratings, even momentarily.

■ Input voltage (for Voltage-sensitive type)

For rising and dropping ratio of input voltage (dv/dt), maintain Min. 100 mV/ms.

■ Oscillation circuit and control circuit (for CC Type)

The oscillation circuit and control circuit of product may be destroyed by external noise, surge, static electricity and so on.

For noise effect to peripheral circuits when oscillation circuit operates, please implement safety measures on the system before use by verifying operation under the actual design.

■ Deterioration and destruction caused by discharge of static electricity

This phenomenon is generally called static electricity destruction, and occurs when static electricity generated by various factors is discharged while the PhotoMOS terminals are in contact, producing internal destruction of the element.

To prevent problems from static electricity, the following precautions and measures should be taken when using your device.

- 1) Employees handling PhotoMOS should wear anti-static clothing and should be grounded through protective resistance of 500 k Ω to 1 M Ω .
- 2) A conductive metal sheet should be placed over the worktable. Measuring instruments and jigs should be grounded.
- 3) When using soldering irons, either use irons with low leakage current, or ground the tip of the soldering iron. (Use of low-voltage soldering irons is also recommended.)
- 4) Devices and equipment used in assembly should also be grounded.
- 5) When packing printed circuit boards and equipment, avoid using high-polymer materials such as foam styrene, plastic, and other materials which carry an electrostatic charge.
- 6) When storing or transporting PhotoMOS, the environment should not be conducive to generating static electricity (for instance, the humidity should be between 45 % and 60 %), and PhotoMOS should be protected using conductive packing materials.

■ Unused terminals

The No. 3 terminal is used with the circuit inside the device. Therefore, do not connect it to the external circuitry with either connection method A, B or C. (1 Form A 6-pin type)

■ Short across terminals


Do not short circuit between terminals when device is energized, since there is possibility of breaking of the internal IC.

■ Surge voltages at the input


If reverse surge voltages are present at the input terminals, connect a diode in reverse parallel across the input terminals and keep the reverse voltages below the reverse breakdown voltage.

Typical circuits are below shown.

1) 6-pin

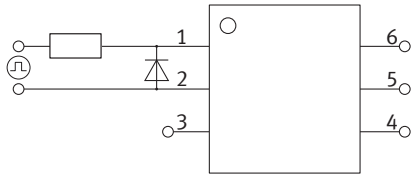


2) Power type



■ Reverse voltages at the input (for CC Type)

If reverse voltages are present at the input terminals, for example, connect a schottky barrier diode in reverse parallel across the input terminals and keep the reverse voltages below the reverse breakdown voltage. Typical circuit is shown below.



■ Recommended LED forward current or recommended input voltage


Design in accordance with the recommended operating conditions for each product.

Since these conditions are affected by the operating environment, ensure conformance with all relevant specifications.


■ LED forward current vs. Ambient temperature characteristics

Please keep the LED forward current to within the range given below.

(*Please check the reference data in each catalog for products with maximum ambient temperature (operating) over 85 °C.)

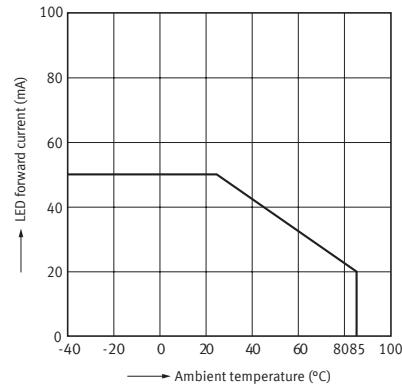


For Aqv209G, APV1111GV, APV3111GV

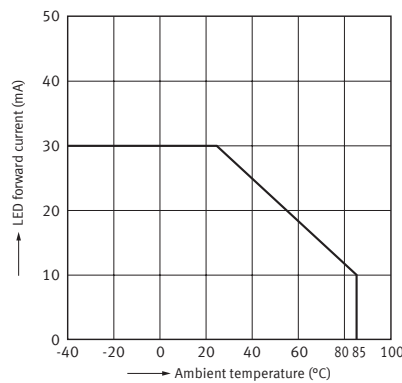


■ Ripple in the input power supply

If ripple is present in the input power supply, observe the following:

- 1) For LED forward current at E_{min} , please maintain the value mentioned at " ■ Recommended LED forward current. "
- 2) Please make sure for the LED forward current at E_{max} . is less than the current value of the " ■ Absolute maximum ratings " .
- 3) Please maintain the input voltage at least 4 V for E_{min} . (GU, RF and Power voltage-sensitive type) .
- 4) Please make sure the input voltage for E_{max} . is no higher than 6 V (GU and RF voltage-sensitive type) .
- 5) Please make sure the input voltage for E_{max} . is no higher than 30 V (Power voltage-sensitive type) .
- 6) Please maintain the input voltage at least 3 V for E_{min} . (for CC Type)
- 7) Please make sure the input voltage for E_{max} . is no higher than 5.5 V. (for CC Type)





- 8) Please keep amplitude voltage of ripple within ± 0.5 V. (for CC Type)

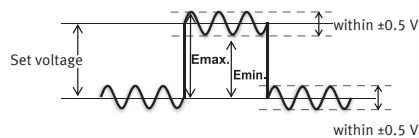




■ Output spike voltages

- 1) If an inductive load generates spike voltages which exceed the absolute maximum rating, the spike voltage shall be limited. Representative circuit examples of AC/DC dual use type are shown below. There are the same with DC only type.



(1) 6-pin

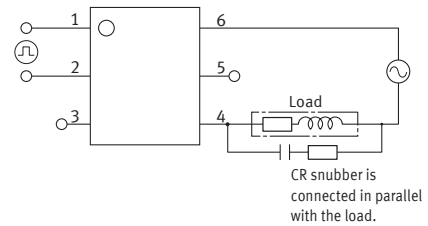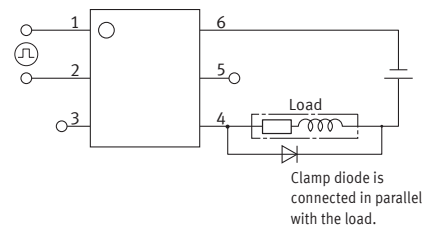

(2) Power type

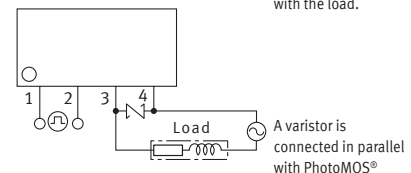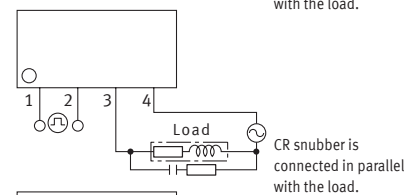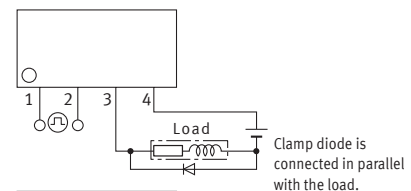

(3) CC Type

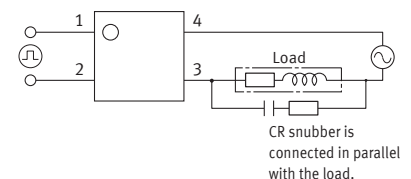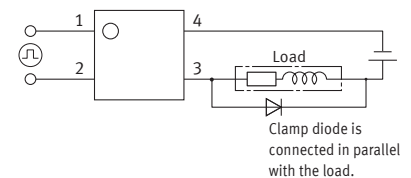


- 2) When Clamp diode or CR Snubber is used in the circuit, the spike voltages from the load are limited. But the longer wire may become the inductance and cause the spike voltage. Keep the wire as short as possible.

■ Output Waveform (CC Type)

This product has the capacitor coupled isolation. Therefore, if output waveform fluctuates along the time axis (e.g. AC waveform or pulsating waveform), it may affect the operation of this product and peripheral circuit. Please evaluate the device in the actual condition.


■ Continual DC bias (AQV259 and AQV258)

If a continual DC bias will be applied between the input and output, the breakdown voltage of the switching element MOSFET on the output side may degrade. Therefore, be sure to test the product under actual conditions. Example of circuits that will cause degradation of breakdown voltage of MOSFET is given below.

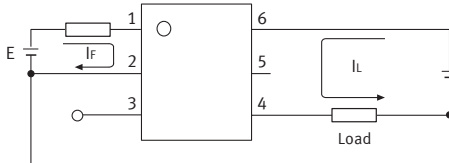

■ Connections Between Input and Output (CC Type)

If you wish to use the product with a connection between input and output, you may not obtain expected performance. Therefore, please be sure to evaluate the device in the actual usage. A circuit example is shown below that may negatively affect PhotoMOS characteristics.

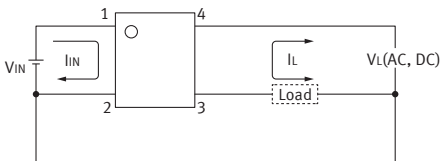

■ Cleaning solvents compatibility

Cleaning the solder flux should use the immersion washing with an organic solvent. If you have to use ultrasonic cleaning, please adopt the following conditions and check that there are no problems in the actual usage.

- Frequency: 27 to 29 kHz
- Ultrasonic output: No greater than 0.25 W/cm²*
- Cleaning time: 30 s or less
- Others: Float PC board and the device in the cleaning solvent to prevent from contacting the ultrasonic vibrator


* Applies to unit area ultrasonic output for ultrasonic baths

■ Notes for mounting

- 1) When different kinds of packages are mounted on PC board, temperature rise at soldering lead is highly dependent on package size. Therefore, please set the lower temperature soldering condition than the conditions of item " ■Soldering " , and confirm the temperature condition of actual usage before soldering.
- 2) When soldering condition exceeds our recommendation, the PhotoMOS characteristics may be adversely affected. It may occur package crack or bonding wire breaking because of thermal expansion unconformity and resin strength reduction. Please contact our sales office about the propriety of the condition.
- 3) Please confirm the heat stress by using actual board because it may be changed by board condition or manufacturing process condition.
- 4) Solder creepage, wettability, or soldering strength will be affected by the soldering condition or used soldering type. Please check them under the actual production condition in detail.
- 5) Please apply coating when the device returns to a room temperature.

■ Input wiring pattern

- 1) With AQY* or AQW* series avoid installing the input (LED side) wiring pattern to the bottom side of the package if you require the specified I/O isolation voltage (Viso) after mounting the PC board. Since part of the frame on the output side is exposed, it may cause fluctuations in the I/O isolation voltage.



* Excluding high I/O isolation voltage products and SSOP, SON, and TSON packages


- 2) Exposed terminals are electrically connected to internal elements. Be aware that contact with external circuits may cause deterioration of insulation between input and output, leading to destruction of internal elements.
- 3) If installed in proximity to other device, take care to avoid short circuits between device, which may occur if exposed frames of adjacent device come too close.

■ Soldering

1) Example of surface-mount terminal recommended conditions

(1) IR (Infrared reflow) soldering method

In case of automatic soldering, following conditions should be observed. (recommended condition reflow: Max. 2 times, measurement point: soldering lead)

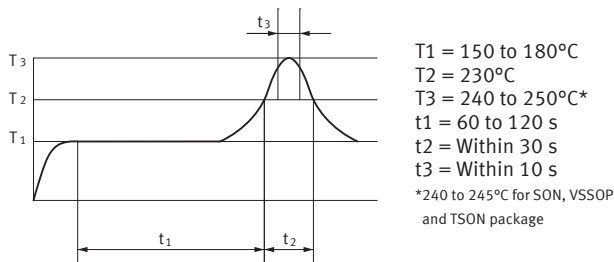

(*Some products have different recommended conditions. Please check " the latest product specifications " .)

(2) Other soldering methods

Other soldering methods (VPS, hot-air, hot plate, laser heating, pulse heater, etc.) affect the PhotoMOS characteristics differently, please evaluate the device under the actual usage.

(3) Manual soldering method


Temperature: 350 to 400 °C, within 3 s, electrical power 30 to 60 W

2) Example of through hole terminal recommended conditions

(1) DWS soldering method

In case of automatic soldering, following conditions should be observed.

(recommended condition number of times: Max. 1 time, measurement point: soldering lead *1)

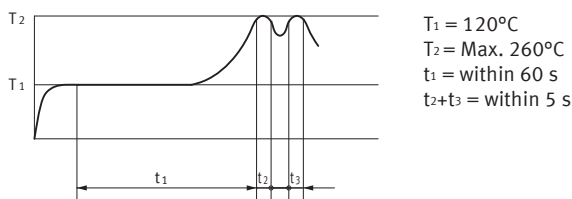

*1: Solder temperature: Max. 260 °C

(2) Other soldering method

(recommended condition: 1 time)

Preheating: Max. 120 °C, within 120 s, measurement point: soldering lead

Soldering: Max. 260 °C, within 10 s, measurement area: soldering temperature


(3) Manual soldering method

Temperature: 350 to 400 °C, within 3 s, electrical power 30 to 60 W

■ About the exposed terminals on the sides of the package (for VSSOP, WSSOP)

For VSSOP and WSSOP type, as shown in the following figure, part of the input and output frames are exposed on the sides of the package. Due to this, please be keep in mind the cautions listed below.

- 1) Take care to avoid short circuits between exposed terminals, which may cause insulation deterioration between input and output, leading to destruction of internal elements.
- 2) Since the exposed terminals are connected electrically to the internal element, please refer to the item " ■Deterioration and destruction caused by discharge of static electricity " , and implement sufficient measures to control static electricity.
- 3) When installing the devices in the vicinity, please keep in mind that if the exposed frames of adjacent devices get too close, a short between devices may occur.



(Example: VSSOP type)

■ Adjacent mounting

When several PhotoMOS are mounted closely each other or heat-generating components are mounted close to the PhotoMOS, the abnormal heating may occur. This abnormal heat may be caused by the internal element when energized or thermal interference between the devices. The degree of temperature rise depends on the mounting layout of the devices and usage condition, therefore please be sure to use PhotoMOS with reduced load current after testing under the worst condition of the actual usage.

■ Transportation and storage

- 1) Extreme vibration during transport may deform the lead or damage the PhotoMOS characteristics. Please handle the outer and inner boxes with care.
- 2) Inadequate storage condition may degrade soldering, appearance, and characteristics. The following storage conditions are recommended:
 - Temperature: 0 to 45 °C
 - Humidity: Max. 70 % RH
 - Atmosphere: No harmful gasses such as sulfurous acid gas, minimal dust.
- 3) Storage before TSON, VSSOP, WSSOP, SON, SSOP, or SOP processing

In case the heat stress of soldering is applied to the PhotoMOS which absorbs moisture inside of its package, the evaporation of the moisture increases the pressure inside the package and it may cause the package blister or crack. This device is sensitive to moisture and it is packed in the sealed moisture-proof package. Please make sure the following condition after unsealing.

 - * Please use the device immediately after unsealing.
(Within 30 days at 0 to 30 °C and Max. 70 % RH)
 - * If the device will be kept for a long time after unsealing, please store in another moisture-proof package containing silica gel. (Please use within 90 days.)

■ Water condensation

Water condensation occurs when the ambient temperature changes suddenly from a high temperature to low temperature at high humidity, or the device is suddenly transferred from a low ambient temperature to a high temperature and humidity. Condensation causes the failures such as insulation deterioration.

Panasonic Industry Co., Ltd. does not guarantee the failures caused by water condensation. The heat conduction by the equipment the PhotoMOS is mounted may accelerate the water condensation. Please confirm that there is no condensation in the worst condition of the actual usage.
(Special attention should be paid when high temperature heating parts are close to the PhotoMOS.)

■ About foreign matter between the output terminals (AQY206GV)

The distance between the output terminals of this device is short. If foreign matter is caught between the output terminals after mounting on the PC board, it will result in a leakage path. This leakage path increases the leakage current, which results in your products to malfunction. Additionally, the leakage path causes abnormal heat generation and short circuiting, which results in the destruction of your products.











Although the absolute maximum load voltage rating is guaranteed for this device, please ensure the prevention of foreign matter on the area between the output terminals and evaluate this device in the most extreme conditions of actual usage.

Packing format

1) Tape and reel

	Tape dimensions	Dimensions of tape reel
TSOP 4-pin	① When picked from 1/2-pin side: Part No. AQY2C*R*PX, AQY2C*R*P1X (Shown above) ② When picked from 3/4-pin side: Part No. AQY2C*R*PZ	*Quality of material: Polystyrene (PS)
VSSOP 4-pin	① When picked from 1 and 4-pin side: Part No. AQY*TY (Shown above) ② When picked from 2 and 3-pin side: Part No. AQY*TW	*Quality of material: Paper
SON 4-pin	① When picked from 1 and 4-pin side: Part No. AQY*MY, AQY*M1Y (Shown above) ② When picked from 2 and 3-pin side: Part No. AQY*MW	*Quality of material: Paper
SSOP 4-pin	① When picked from 1 and 4-pin side: Part No. AQY*VY, AQY221*V1Y, APV*111*VY, APV*111*V1Y (Shown above) ② When picked from 2 and 3-pin side: Part No. AQY*VW, APV*111*VW	*Quality of material: Paper
WSSOP 4-pin	When picked from 1 and 4-pin side: Part No. AQY*WY, AQY*W1Y	*Quality of material: Polystyrene (PS)

Note: " * " indicates characters of number or alphabet.

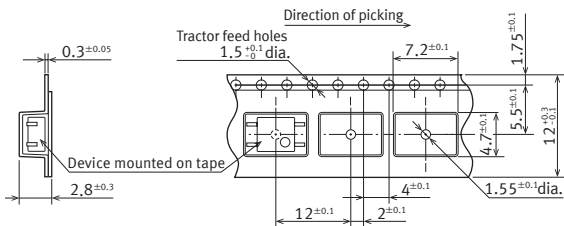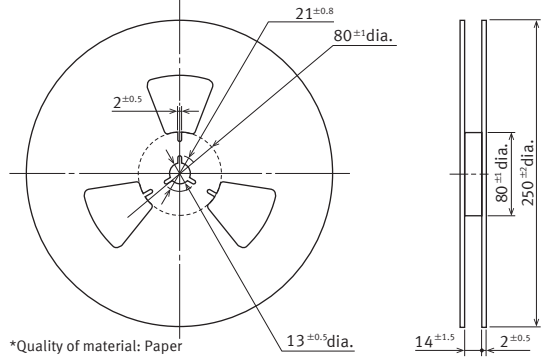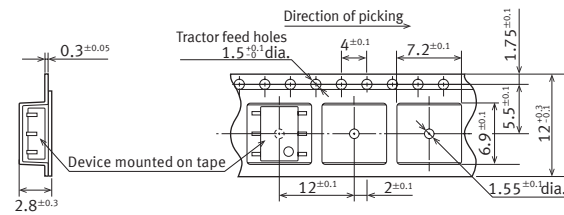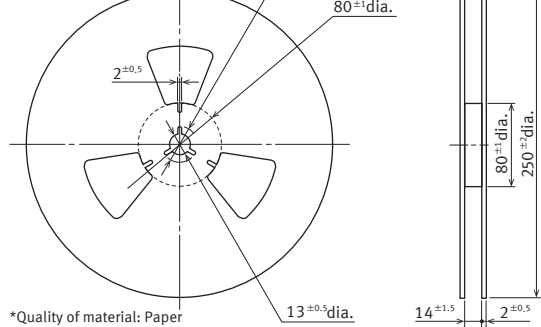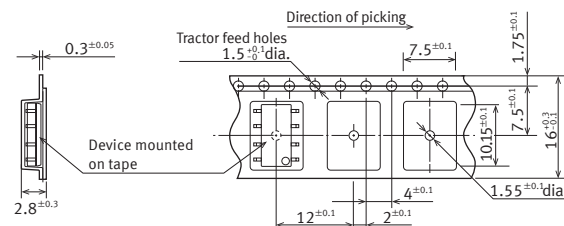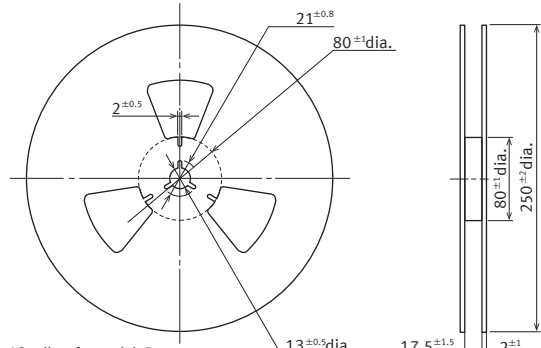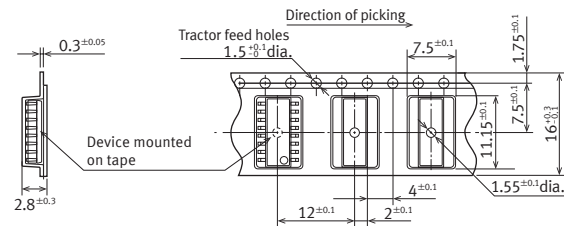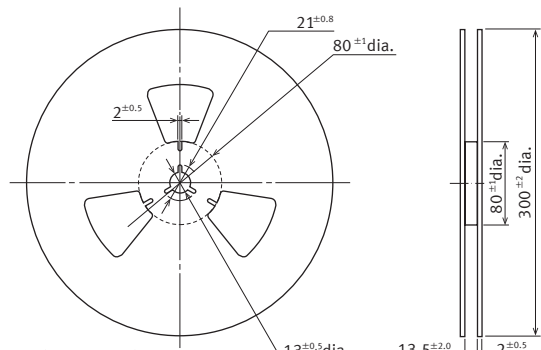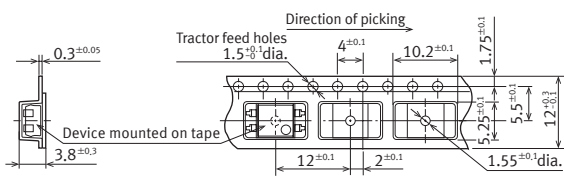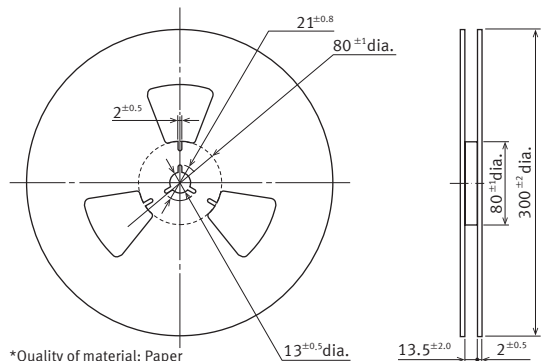	Tape dimensions	Dimensions of tape reel
SOP 4-pin	 ① When picked from 1/2-pin side: Part No. AQY*SX, APV**21SX (Shown above) ② When picked from 3/4-pin side: Part No. AQY*SZ, APV**21SZ	 *Quality of material: Paper
SOP 6-pin	 ① When picked from 1/2/3-pin side: Part No. AQV*SX (Shown above) ② When picked from 4/5/6-pin side: Part No. AQV*SZ	 *Quality of material: Paper
SOP 8-pin	 ① When picked from 1/2/3/4-pin side: Part No. AQW*SX (Shown above) ② When picked from 5/6/7/8-pin side: Part No. AQW*SZ	 *Quality of material: Paper
SOP 16-pin	 ① When picked from 1/2/3/4/5/6/7/8-pin side: Part No. AQS*SX (Shown above) ② When picked from 9/10/11/12/13/14/15/16-pin side: Part No. AQS*SZ	 *Quality of material: Paper
DIP 4-pin Surface mount terminal	 ① When picked from 1/2-pin side: Part No. AQY*HAX, AQY210HLAX (Shown above) ② When picked from 3/4-pin side: Part No. AQY*HAZ, AQY210HLAZ	 *Quality of material: Paper

Note: " * " indicates characters of number or alphabet.


	Tape dimensions	Dimensions of tape reel
DIP 6-pin Surface mount terminal	① When picked from 1/2/3-pin side: Part No. AQV*AX (Shown above) ② When picked from 4/5/6-pin side: Part No. AQV*AZ	*Quality of material: Paper
DIP 8-pin Surface mount terminal	① When picked from 1/2/3/4-pin side: Part No. AQW*AX (Shown above) ② When picked from 5/6/7/8-pin side: Part No. AQW*AZ	*Quality of material: Paper
DIP 8-pin Surface mount terminal High I/O isolation voltage type	① When picked from 1/2/3/4-pin side: Part No. AQW*EHAX, AQW210HLAX (Shown above) ② When picked from 5/6/7/8-pin side: Part No. AQW*EHAZ, AQW210HLAZ	*Quality of material: Paper
Power-DIP 4-pin Surface mount terminal	① When picked from 1/2-pin side: Part No. AQY*AX (Shown above) ② When picked from 3/4-pin side: Part No. AQY*AZ	*Quality of material: Paper
DIP 6-pin Surface mount terminal (Photovoltaic MOSFET driver)	① When picked from 1/2/3-pin side: Part No. APV1122AX (Shown above) ② When picked from 4/6-pin side: Part No. APV1122AZ	*Quality of material: Paper

Note: " * " indicates characters of number or alphabet.


2) Tube

Devices are packaged in a tube so that 1-pin is on the stopper B side. Observe correct orientation when mounting them on PC boards.

(PD type)




(DIP type)



(SOP type)




(Power type)



■ Current limit function (output current control)

- 1) Current limit function aims to increase resistance to surges when the switch is turned on. Before using this function, connect the varistor to the output as shown in the figure below.



* Set the varistor voltage to 150 V or less.

- 2) The current limit function capability can be lost if used longer than the specified time. Be sure to set the output loss to the Max. rate.

■ Short circuit protection circuit


The short circuit protection circuit is designed to protect circuits from excess current. Therefore, surge current may be detected as current overload in which case the output current will be cut and the off state maintained. For this reason, please include the inrush current in the load current and keep it below the maximum load current.

Also, in order to maintain stability of internal IC operation, maintain an input current of at least 5 mA (Latch type) , 10 mA (Non Latch type) .

■ Photovoltaic MOSFET driver cautions for use

When two external MOSFETs are connected with a common source terminal, oscillation may occur when operation is restored. Therefore, please insert a 100 to 1,000 Ω resistor between the gate terminal of the first MOSFET and the gate terminal of the second MOSFET.

A typical example of this is given in the circuit below.

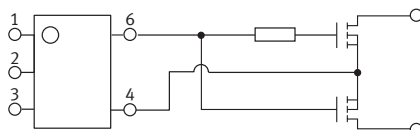

■ Input LED current

(For High Capacity type: with part number G)

When making PhotoMOS turn on and turn off, please make sure that the LED forward current increases and decreases instantly.

■ Input voltage

(for Power voltage-sensitive type)

For rising and dropping ratio of input voltage (dv/dt) , maintain Min. 100 mV/s.

■ Adjacent mounting (for Power type)

- 1) When devices are mounted close together with the heat-generated devices, ambient temperature may rise abnormally. Mounting layout and ventilation should be considered.
- 2) When many devices are mounted close together, load current should be reduced.
(Refer to the data of " Load current in adjacent mounting vs. Ambient temperature characteristics.")

PhotoMOS® Cautions for Use

■ Recommended load voltage

As a guide in selecting PhotoMOS, please refer to the following table.

1) Power PhotoMOS (1 Form A)

		Absolute maximum rating		Recommended load voltage
		Load voltage	Load current	
DC type	AQZ102	60 V DC	4.0 A DC	5, 12, 24 V DC
	AQZ105	100 V DC	2.6 A DC	48 V DC
	AQZ107	200 V DC	1.3 A DC	100 V DC
	AQZ104	400 V DC	0.7 A DC	200 V DC
AC/DC type	AQZ202	Peak AC, DC 60 V	Peak AC, DC 3.0 A	12 V AC 5, 12, 24 V DC
	AQZ205	Peak AC, DC 100 V	Peak AC, DC 2.0 A	24 V AC 48 V DC
	AQZ207	Peak AC, DC 200 V	Peak AC, DC 1.0 A	48 V AC 100 V DC
	AQZ204	Peak AC, DC 400 V	Peak AC, DC 0.5 A	120 V AC 200 V DC

2) Power PhotoMOS (1 Form B)

		Absolute maximum rating		Recommended load voltage
		Load voltage	Load current	
AC/DC type	AQZ404	Peak AC, DC 400 V	Peak AC, DC 0.5 A	100 V AC 200 V DC

3) Power PhotoMOS Voltage-sensitive type (1 Form A)

		Absolute maximum rating		Recommended load voltage
		Load voltage	Load current	
DC type	AQZ102D	60 V DC	3.6 A DC	5, 12, 24 V DC
	AQZ105D	100 V DC	2.3 A DC	48 V DC
	AQZ107D	200 V DC	1.1 A DC	100 V DC
	AQZ104D	400 V DC	0.6 A DC	200 V DC
AC/DC type	AQZ202D	Peak AC, DC 60 V	Peak AC, DC 2.7 A	12 V AC 5, 12, 24 V DC
	AQZ205D	Peak AC, DC 100 V	Peak AC, DC 1.8 A	24 V AC 48 V DC
	AQZ207D	Peak AC, DC 200 V	Peak AC, DC 0.9 A	48 V AC 100 V DC
	AQZ204D	Peak AC, DC 400 V	Peak AC, DC 0.45 A	120 V AC 200 V DC

4) Power PhotoMOS High Capacity type (1 Form A)

		Absolute maximum rating		Recommended load voltage
		Load voltage	Load current	
DC type	AQZ192	60 V DC	10 A DC	5, 12, 24 V DC
	AQZ197	200 V DC	5 A DC	100 V DC
AC/DC type	AQZ202G	Peak AC, DC 60 V	Peak AC, DC 6 A	12 V AC 5, 12, 24 V DC
	AQZ205G	Peak AC, DC 100 V	Peak AC, DC 4 A	24 V AC 48 V DC
	AQZ207G	Peak AC, DC 200 V	Peak AC, DC 2 A	48 V AC 100 V DC
	AQZ206G2	Peak AC, DC 600 V	Peak AC, DC 1 A	120, 240 V AC 200, 400 V DC

■ Global Sales Network Information: industry.panasonic.com/global/en/salesnetwork/globalnetwork

Panasonic
INDUSTRY

Panasonic Industry Co., Ltd.

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industry.panasonic.com