


## 150 Series In-Line Holders for 2AG or 5×20mm Fuses



### Agency Approval

| Agency | Agency File Number |
|--------|--------------------|
|        | E14721             |

### Dimensions [mm]

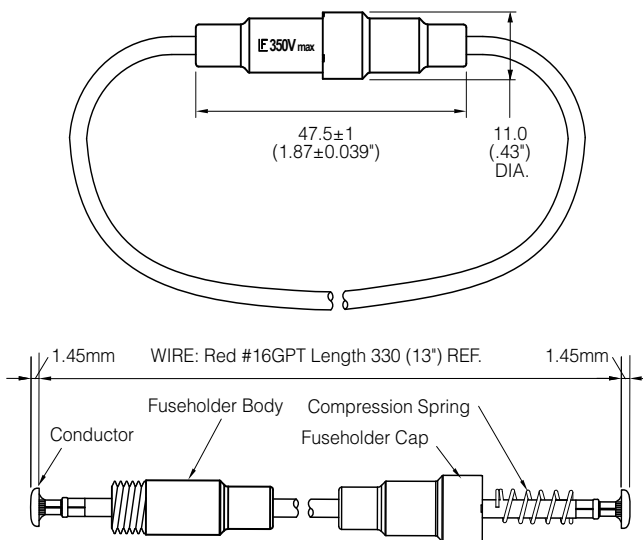

### Product Characteristics

| Compatible Fuses           | 2AG or 5×20mm                                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Electrical</b>          | This fuseholder, part number 150274, is intended for use with 2AG and 5 × 20mm fuses. Maximum current ratings are 5 amperes at 350V for the 2AG size fuses and 10 amperes at 350V for the 5 × 20mm size fuses.** |
| <b>Body</b>                | Black Nylon, UL94 V-0                                                                                                                                                                                            |
| <b>Terminals</b>           | Brass                                                                                                                                                                                                            |
| <b>Wire</b>                | 16 Awg size; Nominal o.d. 0.104"; color Red                                                                                                                                                                      |
| <b>Lead Pull Test</b>      | Will withstand 10 lb. pull.                                                                                                                                                                                      |
| <b>Ambient Temperature</b> | -40°C to +80°C.                                                                                                                                                                                                  |

#### NOTES:

- \* Ensure that proper fuse re-rating is factored in fuseholder selection.
- \*\* If use above 32V, power must be turn off when changing the fuse.

### Ordering Information

| Ordering Number     | Packaging            |
|---------------------|----------------------|
| <b>01500274Z</b>    | Bulk Pack (1000 Pcs) |
| <b>01500274LXN</b>  | Bulk Pack (100 Pcs)  |
| <b>*01500274ZXU</b> | Bulk Pack (5000 Pcs) |

#### NOTES:

- \* For unassembled Fuseholder, UL certification does not apply.

### Additional Information



**Datasheet**



**Resources**



**Samples**