

PNP Transistor

multicomp^{PRO}

RoHS
Compliant



Features

- Low current (maximum 100mA)
- Low voltage (maximum 65V)

Applications

- General purpose switching and amplification

Max. Ratings and Characteristics: T_{AMB} = 25°C unless otherwise specified

Parameter	Symbol	Values	Unit
Collector - Base Voltage - BC856 BC857 BC858	V _{CBO}	-80 -50 -30	V
Collector - Emitter Voltage - BC856 BC857 BC858	V _{CEO}	-65 -45 -30	
Emitter - Base Voltage	V _{EBO}	-5	
Collector Current - Continuous	I _C	-0.1	A
Collector Dissipation	P _C	250	mW
Junction and Storage Temperature	T _J , T _{STG}	-65 to +150	°C

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C = -10μA I _E =0 BC856 BC857 BC858	-80 -50 -30			V
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C = -10μA I _B =0 BC856 BC857 BC858	-65 -45 -30			
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E = -1μA I _C = 0	-5	-	-	
Collector Cut-Off Current	I _{CBO}	V _{CB} = -30V I _E = 0	-	-1	-15	nA
Emitter Cut-Off Current	I _{EBO}	V _{EB} = -5V, I _C = 0	-	-	-0.1	μA
DC Current Gain BC856, 857 BC856A, 857A, 858A BC856B, 857B, 858B BC857C, 858C	h _{FE}	V _{CE} = -5V, I _C = -2mA	125 125 220 420	-	475 250 475 800	-
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C = -100mA, I _B = -5mA I _C = -10mA, I _B = -0.5mA	-	-	-0.65 -0.3	V
Base - Emitter Saturation Voltage	V _{BE(sat)}	I _C = -10mA, I _B = -0.5mA I _C = -100mA, I _B = -5mA	-	-0.7 -0.85	-	V
Base Emitter Voltage	V _{BE}	I _C = -2mA, V _{CE} = -5V I _C = -10mA, V _{CE} = -5V	-0.6	-0.65	-0.75 -0.82	V

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp^{PRO}


PNP Transistor

multicompPRO

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Collector Capacitance	C_C	$V_{CB} = -10V, I_E = I_C = 0$ $f = 1MHz$	-	4.5	-	pF
Transition Frequency	F	$I_C = -200\mu A, V_{CE} = -5V,$ $R_S = 2k\Omega, f = 1kHz,$ $B = 200Hz$	-	2	10	dB
Transition Frequency	f_T	$V_{CE} = -10, I_C = -50,$ $f = 20 MHz$	100	-	-	MHz

Maximum Ratings and Characteristics : $T_{amb} = 25^\circ C$ unless otherwise specified

Ratings and Characteristic Curves

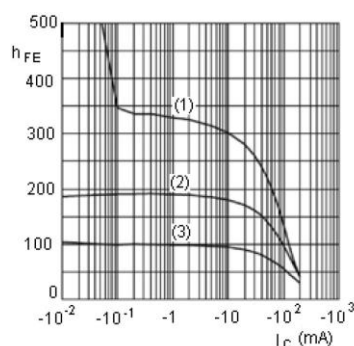


BC857A : $V_{CE} = -5V$

(1) $T_{amb} = 150^\circ C$

(2) $T_{amb} = 25^\circ C$

(3) $T_{amb} = -55^\circ C$

DC Current Gain as a Function of Collector Current; Typical Values

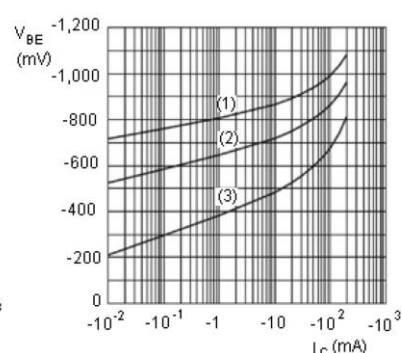


BC857A : $V_{CE} = -5V$

(1) $T_{amb} = -55^\circ C$

(2) $T_{amb} = 25^\circ C$

(3) $T_{amb} = 150^\circ C$

Base-Emitter Voltage as a Function of Collector Current; Typical Values

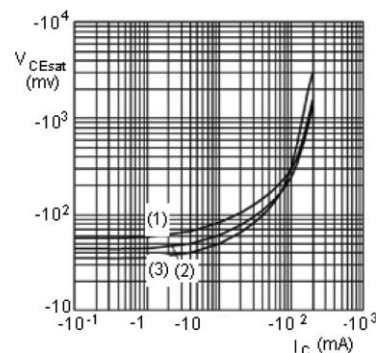


BC857A : $I_C / I_B = 20$

(1) $T_{amb} = 150^\circ C$

(2) $T_{amb} = 25^\circ C$

(3) $T_{amb} = -55^\circ C$

Collector-Emitter Saturation Voltage as a Function of Collector Current; Typical Values

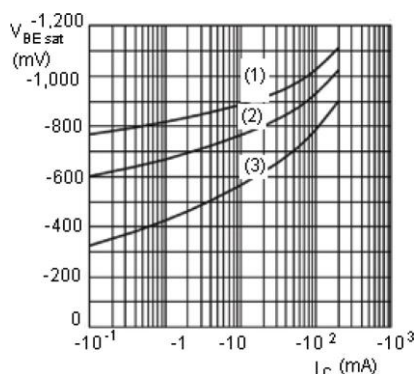


BC857A : $I_C / I_B = 20$

(1) $T_{amb} = -55^\circ C$

(2) $T_{amb} = 25^\circ C$

(3) $T_{amb} = 150^\circ C$

Base-Emitter Voltage as a Function of Collector Current; Typical Values

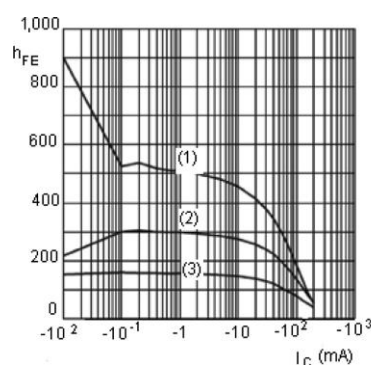


BC857B : $V_{CE} = -5V$

(1) $T_{amb} = 150^\circ C$

(2) $T_{amb} = 25^\circ C$

(3) $T_{amb} = -55^\circ C$

DC Current Gain as a Function of Collector Current; Typical Values

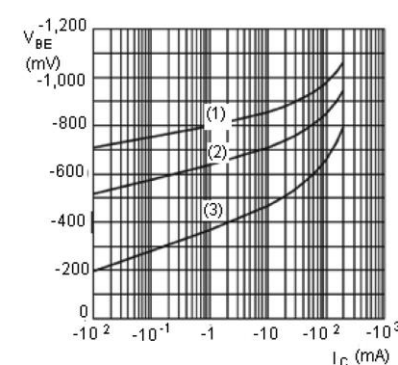

BC857B : $V_{CE} = -5V$

(1) $T_{amb} = -55^\circ C$


(2) $T_{amb} = 25^\circ C$

(3) $T_{amb} = 150^\circ C$

Base-Emitter Voltage as a Function of Collector Current; Typical Values

PNP Transistor


multicompPRO

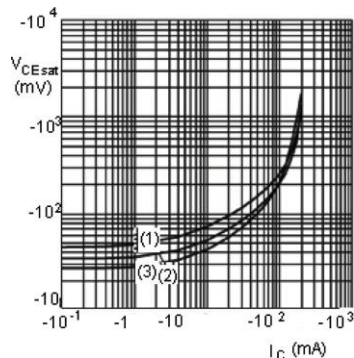

BC857B : $I_C / I_B = 20$

- (1) $T_{amb} = 150^\circ\text{C}$
- (2) $T_{amb} = 25^\circ\text{C}$
- (3) $T_{amb} = -55^\circ\text{C}$


Collector-Emitter Saturation Voltage as a Function of Collector Current; Typical Values

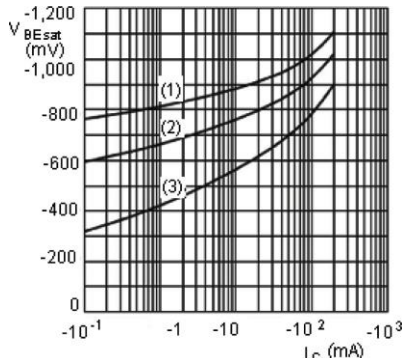

BC857B : $I_C / I_B = 20$

- (1) $T_{amb} = -55^\circ\text{C}$
- (2) $T_{amb} = 25^\circ\text{C}$
- (3) $T_{amb} = 150^\circ\text{C}$


Base-Emitter Voltage as a Function of Collector Current; Typical Values

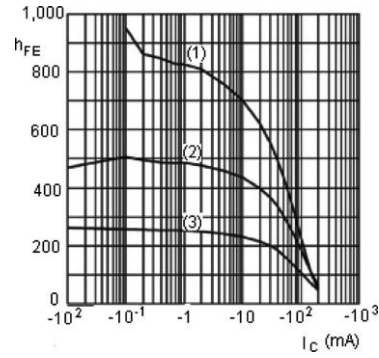

BC857C : $V_{CE} = -5\text{ V}$

- (1) $T_{amb} = 150^\circ\text{C}$
- (2) $T_{amb} = 25^\circ\text{C}$
- (3) $T_{amb} = -55^\circ\text{C}$


DC Current Gain as a Function of Collector Current; Typical Values

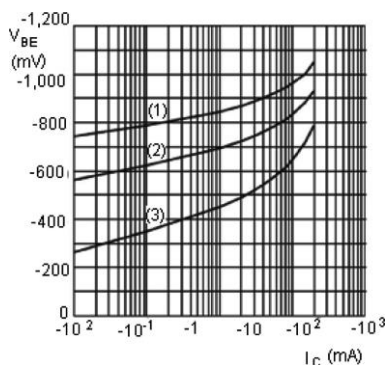

BC857C : $V_{CE} = -5\text{ V}$

- (1) $T_{amb} = -55^\circ\text{C}$
- (2) $T_{amb} = 25^\circ\text{C}$
- (3) $T_{amb} = 150^\circ\text{C}$


Base-Emitter Voltage as a Function of Collector Current; Typical Values

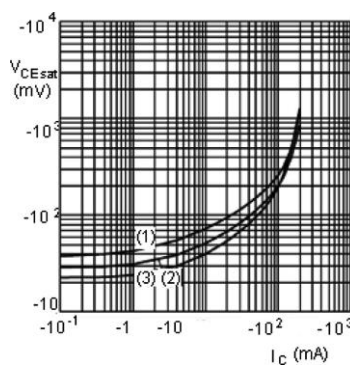

BC857C : $I_C / I_B = 20$

- (1) $T_{amb} = 150^\circ\text{C}$
- (2) $T_{amb} = 25^\circ\text{C}$
- (3) $T_{amb} = -55^\circ\text{C}$

Collector-Emitter Saturation Voltage as a Function of Collector Current; Typical Values

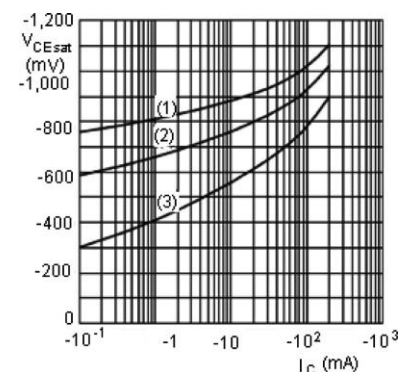


BC857C : $I_C / I_B = 20$

- (1) $T_{amb} = -55^\circ\text{C}$
- (2) $T_{amb} = 25^\circ\text{C}$
- (3) $T_{amb} = 150^\circ\text{C}$

Base-Emitter Voltage as a Function of Collector Current; Typical Values

Package Outline

Plastic Surface Mounted Package



SOT-23		
Dim.	Min.	Max.
A	2.85	2.95
B	1.25	1.35
C	1 Typical	
D	0.4 Typical	
E	0.35	0.48


SOT-23		
Dim.	Min.	Max.
G	1.85	1.95
H	0.02	0.1
J	0.1 Typical	
K	2.35	2.45

Dimensions : Millimetres

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

Soldering Footprint

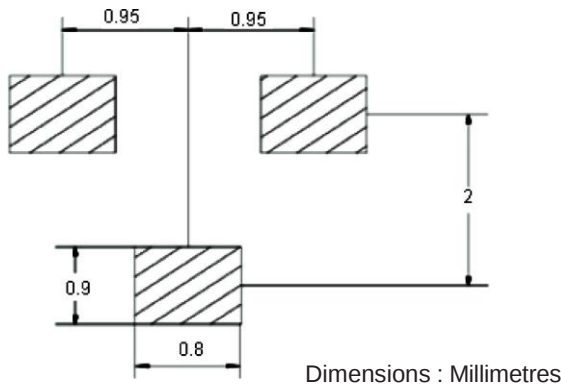

Part Number Marking code

BC856	3D
BC856A	3A
BC856B	3B
BC857	3H
BC857A	3E
BC857B	3F
BC857C	3G
BC858B	3K

Package Information

Device	Package	Shipping
BC856 / 857 / 858	SOT-23	3,000 / Tape and Reel

Part Number Table

Description	Part Number
Transistor, PNP, 0.1A, 65V, SOT23	BC856
Transistor, PNP, 0.1A, 65V, SOT23	BC856A
Transistor, PNP, 0.1A, 65V, SOT23	BC856B
Transistor, PNP, 0.1A, 45V, SOT23	BC857
Transistor, PNP, 0.1A, 45V, SOT23	BC857A
Transistor, PNP, 0.1A, 45V, SOT23	BC857B
Transistor, PNP, 0.1A, 45V, SOT23	BC857C
Transistor, PNP, 0.1A, 30V, SOT23	BC858B

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.