

CUBEFuse™ Compact Circuit Protector Base (CCPB)



Features and benefits:

- Uses finger-safe, current-limiting Class CF CUBEFuse with Class J performance available, time-delay or fast-acting versions from 1 to 100 amps*
- Patented ampacity rejection feature helps prevent overfusing
- High 200kA short-circuit current ratings
- Disconnect rated to provide means for load isolation
- All versions are full voltage rated at 600Vac
- 125Vdc rated for 80A and below
- UL 98 Listed and suitable for branch circuit disconnect
- 1-, 2- and 3-pole versions are horsepower rated
- Listed to UL and cULus
- Open fuse indication light per pole
- Additional open fuse indication can be provided by using the time-delay indicating CUBEFuse version
- Built-in switch/fuse interlock prohibits fuse removal while energized
- Permanent lockout/tagout provisions
- Lock-On provision available when used in the Bussmann series Quik-Spec Coordination Panelboard (QSCP)

* See data sheet 9000 for time-delay CUBEFuse and data sheet 2147 for fast-acting CUBEFuse specifications.

Product description:

The revolutionary Bussmann™ series Compact Circuit Protector Base (CCPB) with CUBEFuse™ is designed as a fused branch circuit disconnect switch for the Bussmann series Quik-Spec™ Coordination Panelboard. The CCPB with CUBEFuse simplifies selective coordination and lockout/tagout provisions allow for isolation of individual branch circuit loads for safe work practices.



Powering Business Worldwide

Specifications:

Switch ampacity and rejection breaks

- 15A, 20A, 30A, 40A, 50A, 60A, 70A, 90A and 100A

Poles

- 1-, 2- and 3-pole versions

Volts

- 600Vac (or less)
- 125Vdc (15, 20, 30, 40, 70 and 90 amp switches with $\leq 80A$ fuse)

Agency information

- UL 98 Listed, File E302370, Guide WHTY
- cULus to CSA Standard 22.2 No. 4, File E302370, Guide WHTY7
- CE compliant
- RoHS compliant

Terminals

Lineside bolt-on bus connector and torque

- Bolt-mounted design into Quik-Spec Coordination Panelboard bus
- #10-32-UNC Hex flange Phillips screw; 25 Lb-In (2.8 N•m)

Loadside box lug terminal and torque

- 15-60A:
 - 18 to 10 AWG (1 to 6mm²) single or dual rated (same size wire), solid or stranded – 75°C or higher - Cu only; 20 Lb-In (3.4 N•m)
 - 8 to 6 AWG (10 to 16mm²) single or dual rated (same size wire), solid or stranded – 75°C or higher - Cu only; 35 Lb-In (5.8 N•m)
 - 4 AWG (25mm²) single – 75°C or higher - Cu only; 35 Lb-In (5.8 N•m)
- 100A:
 - 18 to 10 AWG (1 to 6mm²) single, solid or stranded – 75°C or higher - Cu only; 25 Lb-In (2.82 N•m)
 - 8 to 1 AWG (10 to 45mm²) single stranded – 75°C or higher - Cu only; 40 Lb-In (4.52 N•m)
 - 6 AWG (16mm²) dual stranded (same size wire) – 75°C or higher Cu only; 45 Lb-In (5.08 N•m)

Loadside fork terminal

- Max. 30A suitable for use with #8-32UNC screw

Lockout/tagout

- 4mm shank lock

Local open fuse indication

- Light illumination requires closed circuit and minimum 90V operating voltage

Shipping weight

- 2.03 lbs per carton



Carton quantity

- 6 poles

Environmental data

Storage and operating temperature -20°C to 75°C**

** For fuse performance under or above 25°C, consult fuse performance derating charts.

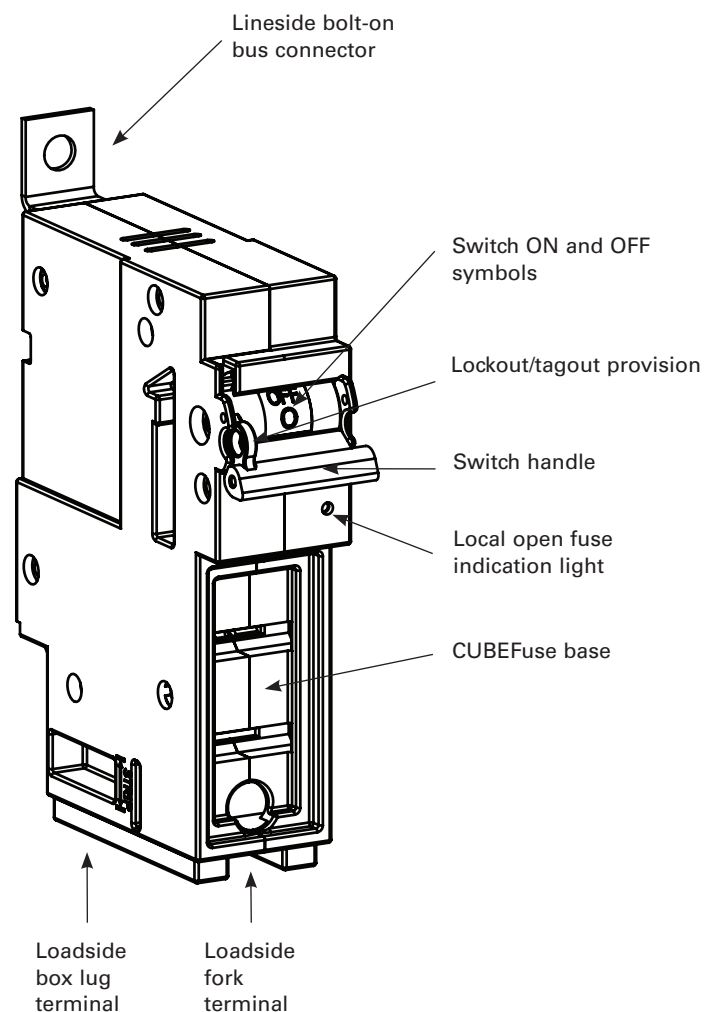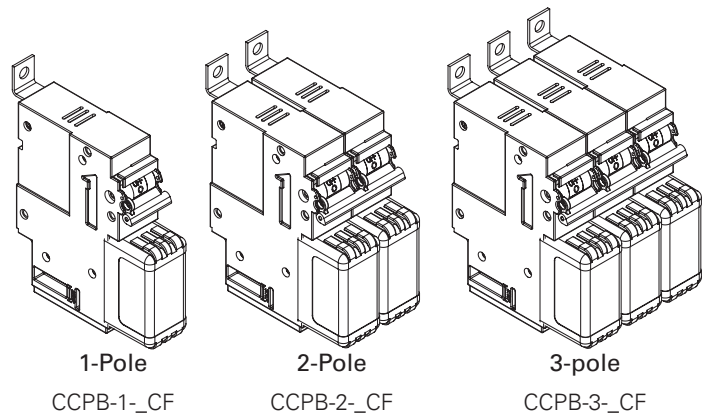

Catalog numbers:

CCPB part numbers	Poles	Voltage rating	Accepts CUBEFuse amp range	Typical installed fuse amp range			Max. fuse amps†	SCCR	Hp ratings (Vac)††
				Time-delay non-indicating	Time-delay indicating*	Fast-acting non-indicating**			
CCPB-1-15CF	1	600Vac, 125Vdc	1 to 15	TCF1RN, TCF3RN, TCF6RN, TCF10RN, TCF15RN	TCF6, TCF10, TCF15	FCF1RN, FCF3RN, FCF6RN, FCF10RN, FCF15RN	15A	200kA AC 100kA DC	0.5Hp@120V
CCPB-2-15CF	2								1.5Hp@240V
CCPB-3-15CF	3	600Vac							3Hp@240V 5Hp@480V 7.5Hp@600V
CCPB-1-20CF	1	600Vac, 125Vdc	1 to 20	TCF17-1/2RN, TCF20RN	TCF17-1/2, TCF20	FCF20RN	20A	200kA AC 100kA DC	0.75Hp@120V
CCPB-2-20CF	2								2Hp@240V
CCPB-3-20CF	3	600Vac							3Hp@240V 7.5Hp@480V 10Hp@600V
CCPB-1-30CF	1	600Vac, 125Vdc	1 to 30	TCF25RN, TCF30RN	TCF25, TCF30	FCF25RN, FCF30RN	30A	200kA AC 100kA DC	1.5Hp@120V
CCPB-2-30CF	2								3Hp@240V
CCPB-3-30CF	3	600Vac							5Hp@240V 15Hp@480V 10Hp@600V
CCPB-1-40CF	1	600Vac, 125Vdc	1 to 40	TCF35RN, TCF40RN	TCF35, TCF40	FCF35RN, FCF40RN	40A	200kA AC 100kA DC	2.0Hp@120V
CCPB-2-40CF	2								3Hp@240V
CCPB-3-40CF	3	600Vac							7.5Hp@240V 20Hp@480V 10Hp@600V
CCPB-1-50CF	1	600Vac, 125Vdc	1 to 50	TCF45RN, TCF50RN	TCF45, TCF50	FCF45RN, FCF50RN	50A	200kA AC 100kA DC	3.0Hp@120V
CCPB-2-50CF	2								5Hp@240V
CCPB-3-50CF	3	600Vac							7.5Hp@240V 20Hp@480V 10Hp@600V
CCPB-1-60CF	1	600Vac, 125Vdc	1 to 60	TCF60RN	TCF60	FCF60RN	60A	200kA AC 100kA DC	3.0Hp@120V
CCPB-2-60CF	2								7.5Hp@240V
CCPB-3-60CF	3	600Vac							7.5Hp@240V 20Hp@480V 10Hp@600V
CCPB-1-70CF	1	600Vac, 125Vdc	1 to 70	TCF70RN	TCF70	FCF70RN	70A	200kA AC 100kA DC	3.0Hp@120V
CCPB-2-70CF	2								7.5Hp@240V
CCPB-3-70CF	3	600Vac							15Hp@240V 30Hp@480V 40Hp@600V
CCPB-1-90CF	1	600Vac, 125Vdc	1 to 90	TCF90RN	TCF90	FCF80RN, FCF90RN	90A	200kA AC 100kA DC	5.0Hp@120V
CCPB-2-90CF	2								10Hp@240V
CCPB-3-90CF	3	600Vac							20Hp@240V 50Hp@480V 40Hp@600V
CCPB-1-100CF	1	600Vac, 125Vdc†††	1 to 100	TCF100RN	TCF100	FCF100RN	100A	200kA AC	5.0Hp@120V
CCPB-2-100CF	2								10Hp@240V
CCPB-3-100CF	3	600Vac							20Hp@240V 50Hp@480V 40Hp@600V

* 1A and 3A indicating CUBEFuse not available. Correct fit with CCPB disconnect requires indicating CUBEFuse with date code R38 or later.

** Do not use UPS/Critical Application fast-acting FCF with motors.


† Any fuse with an amp rating less than or equal to the max fuse rating may be used. E.g., TCF15 may be used with CCPB-1-20CF.

†† Indicating or non-indicating time-delay CUBEFuse only.


††† 125Vdc only applies up to 80A.

Dimensions — in (mm):

15-60A

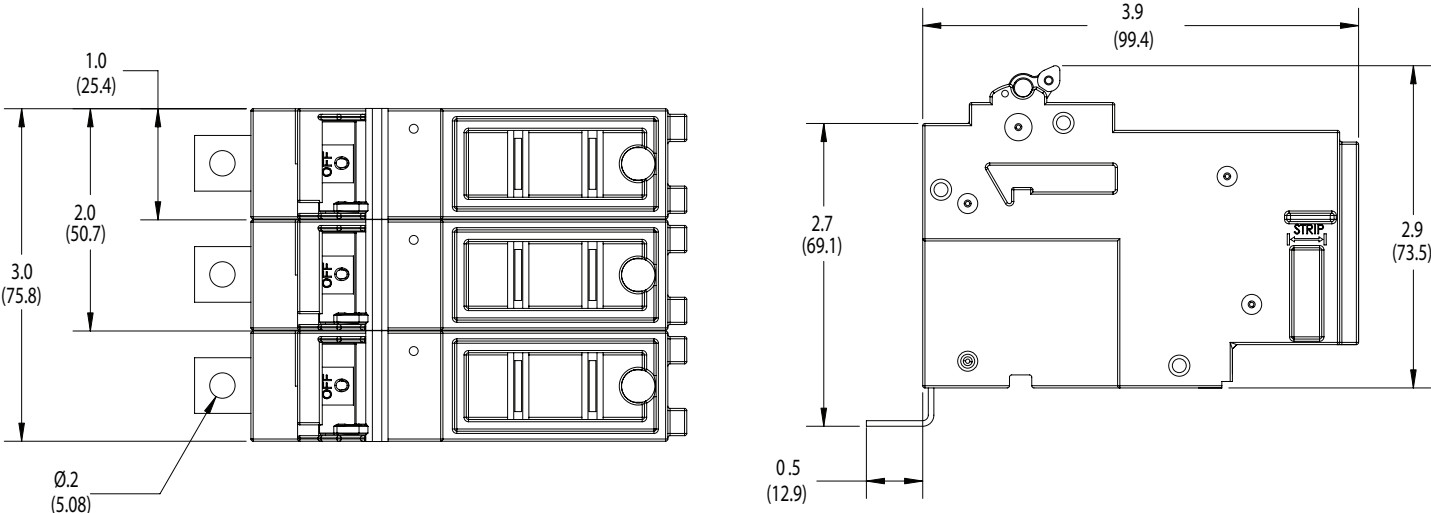

70-100A

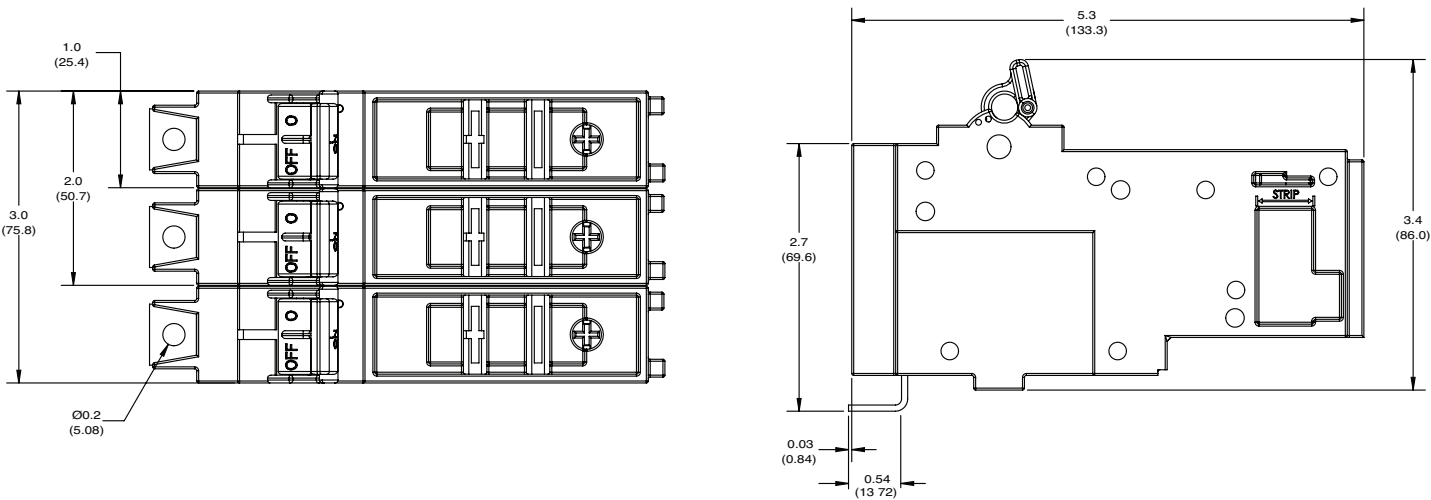

For details on the CCPB and its use in the Quik-Spec Coordination Panelboard, see data sheet 1160.

Motor sizing table:

Low-Peak™ TCF_ and TCT_RN time-delay Class CF fuses

Voltage	Motor size (Hp)	Motor FLA (amps)	Optimal protection (amps)	Code max (amps)	Heavy start (amps)
115Vac, 1-Phase	0.167	4.4	10	10	10
	0.25	5.8	10	15	15
	0.333	7.2	15	15	15
	0.5	9.8	15	20	20
	0.75	13.8	25	25	30
	1	16	25	30	35
	1.5	20	30	35	45
	2	24	40	45	50
	3	34	50	60	N/A
230Vac, 1-Phase	5**	56	90	100	N/A
	0.167	2.2	6	6	6
	0.25	2.9	6	6	6
	0.333	3.6	6	10	10
	0.5	4.9	10	10	10
	0.75	6.9	15	15	15
	1	8	15	15	17.5
	1.5	10	15	20	20
	2	12	20	25	25
	3	17	25	30	35
	5	28	45	50	60
200Vac, 3-Phase	7.5	40	60	N/A	N/A
	10**	50	80	90	N/A
	0.5	2.5	6	6	6
	0.75	3.7	6	10	10
	1	4.8	10	10	10
	1.5	6.9	15	15	15
	2	7.8	15	15	17.5
	3	11	17.5	20	20
	5	17.5	30	35	35
	7.5	25.3	40	45	50
	20**	62.1	100	N/A	N/A
208Vac, 3-Phase	0.5	2.4	6	6	6
	0.75	3.5	6	10	10
	1	4.6	10	10	10
	1.5	6.6	10	15	15
	2	7.5	15	15	15
	3	10.6	17.5	20	20
	5	16.7	25	30	35
	7.5	24.2	40	45	50
	20**	59.4	90	N/A	N/A

Voltage	Motor size (Hp)	Motor FLA (amps)	Optimal protection (amps)	Code max (amps)	Heavy start (amps)
230Vac, 3-Phase	0.5	2.2	6	6	6
	0.75	3.2	6	6	6
	1	4.2	10	10	10
	1.5	6	10	15	15
	2	6.8	15	15	15
	3	9.6	15	20	20
	5	15.2	25	30	30
	7.5	22	35	40	45
	20**	54	90	100	N/A
460Vac, 3-Phase	0.5	1.1	3	3	3
	0.75	1.6	3	3	3
	1	2.1	6	6	6
	1.5	3	6	6	6
	2	3.4	6	6	6
	3	4.8	10	10	10
	5	7.6	15	15	15
	7.5	11	17.5	20	20
	10	14	25	25	30
	15	21	35	40	45
	20	27	40	50	60
575Vac, 3-Phase	50**	65	100	N/A	N/A
	0.5	0.9	3	3	3
	0.75	1.3	3	3	3
	1	1.7	3	3	3
	1.5	2.4	6	6	6
	2	2.7	6	6	6
	3	3.9	6	10	10
	5	6.1	10	15	15
	7.5	9	15	20	20
	10	11	17.5	20	20
	40**	41	70	80	80

Note: Use Code Max column for low to moderate reverse/jog/plug applications. Heavy Start permitted only if Code Max does not allow motor start-up.

* Based on motor FLA from NEC® tables 430.248 and 430.250.

The only controlled copy of this Data Sheet is the electronic read-only version located on the Eaton Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton

1000 Eaton Boulevard
Cleveland, OH 44122
Eaton.com

Bussmann Division
114 Old State Road
Ellisville, MO 63021
United States
Eaton.com/bussmannseries

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 1161 - BU-SB15190
April 2017

Eaton, Bussmann, Quik-Spec and CUBEfuse are valuable trademarks of Eaton in the U.S. and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.
NEC is a registered trademark of the National Fire Protection Association, Inc.
NEMA is a registered trademark of the National Electrical Manufacturers Association.
UL is a registered trademark of the Underwriters Laboratories, Inc.

**For Eaton's Bussmann series
product information,
call 1-855-287-7626 or visit:
Eaton.com/bussmannseries**

Follow us on social media to get the
latest product and support information.

