


Fuse terminals

TS 35 / PA

KSKM 1

10 mm²

5 x 20

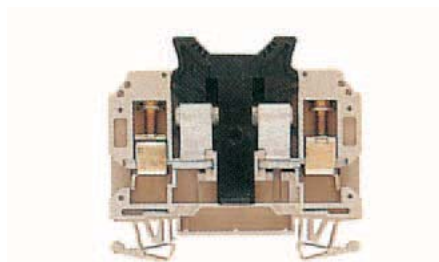

13 x 69 x 63

6.3 / 16


0.33 ... 16



KSKM 2

10 mm²

1 x 1/4

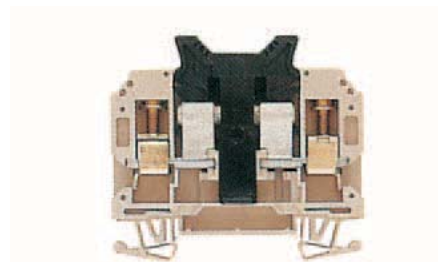

13 x 69 x 63

13 / 16

0.33 ... 16



When using ATEX certified components in hazardous area applications the installation instructions and the rated data for accessories in the technical appendix must be considered.

Width/Length/Height with TS35x7.5 mm
Max. current / max. cond. cross-section A/mm²
Max. clamping range mm²

Technical data

Rated data	
Rated voltage for adjacent terminal	V
Rated current	A
Rated cross-section	mm ²
Rated impulse voltage / Pollution severity	kV/-
Plug gauge IEC 60-947-1 / flammability class acc. UL 94	
Approvals	
Clampable conductors (H05V/H07V)	
Solid / stranded	mm ²
Flexible / flexible w. wire end ferrule	mm ²
Tightening torque range (clamping screw)	Nm
Stripping length / blade size	mm / -
2 clampable conductors of equal cross-section	
Solid / stranded	mm ²
Flexible / flexible w. wire end ferrule	mm ²
Information	

IEC	UL	CSA	EN 50019
250	600		
6.3	10		
10	AWG 22... 8		
B6 / V-0			
			
Rated connection		Additional connection	
0.5...16			
0.5...10			
1.2...2.4 (M 4)			
12 / 5.5 x 1.0			

IEC	UL	CSA	EN 50019
250	600		
13	15		
10	AWG 22... 8		
B6 / V-0			
			
Rated connection			
0.5...16			
0.5...10			
1.2...2.4 (M4)			
12 / 5.5 x 1.0			

Order data

Version	
without LED	
Information	

Type	Qty.	Order No.
KSKM 1/35 G20	20	9509600000
Information		

Type	Qty.	Order No.
KSKM 2/35 GZ 1X1/4	20	9509610000
Information		

Accessories

Cross-connection	
	2-pole 3-pole 4-pole 10-pole
(Q)	
Fuse cartridges	
Rated voltage 250V	
Fuse cartridges	
Rated voltage 440V	
Contact sleeve	
Marking systems	
Detailed information on all versions in chapter accessories.	

Type	Current [A]	Qty.	Order No.
G 20/0.1A/F		10	0430300000
G 20/0.2A/F		10	0430400000
G 20/0.25A/F		10	0430500000
G 20/0.5A/F		10	0430600000
G 20/0.63A/F		10	0439000000
G 20/1A/F		10	0430700000
G 20/1.6A/F		10	0430800000
G 20/2A/F		10	0430900000
G 20/2.5A/F		10	0431000000
G 20/3.15A/F		10	0431100000
G 20/4A/F		10	0431200000
G 20/5A/F		10	0431300000
Information			
SBL/1912 PLATED		10	0446100000
Information			
DEK 5			
Information			


Type	Current [A]	Qty.	Order No.
SBL/2111 PLATED		10	0446200000
Information			
DEK 5			
Fuse 1 x 1/4 aren't by Weidmüller available.			

Fuse terminals

KSKM 3

10 mm²

1 1/4 x 1/4

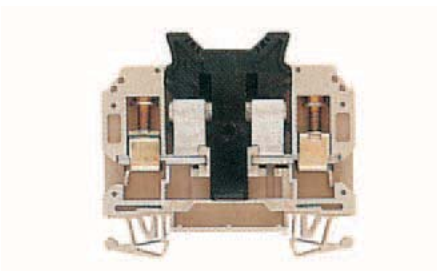

13 x 69 x 63.2
10 / 16

107 16
0.33 ... 16

A horizontal number line with open circles at both ends. A rectangular box is drawn around the number 16, which is positioned in the middle of the line.

IEC	UL	CSA	EN 50019
440	600		
10	15		
10	AWG 22... 8		
B6 / V-0			



0.5...16

0.5...10

12 24 (M4)

$$12 / 55 \times 10$$

12 / 3.0 x 1.0


Type	Qty.	Order No.
KSKM 3/35 GZ 1 1/4X1/4	20	9509620000

Type	Current [A]	Qty.	Order No.
------	-------------	------	-----------

GZ 1.0A/F	10	0525500000
GZ 2.0A	10	0294500000
GZ 3.0A	10	0295700000

SBL/2489 PLATED	10	0446300000
-----------------	----	------------

KDKS 1/35 4 mm²

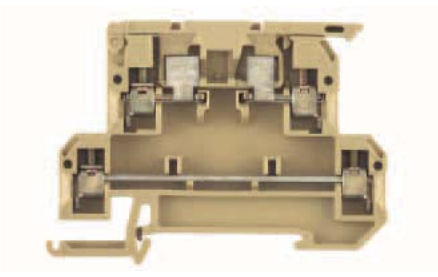4 mm²

8 x 73.5 x 55.6

6 2 / 4



0.33 ... 4



IEC 60947-7-3 / VDE 0611-6

IEC	UL	CSA	EN 50019
500	300		
6.3	10		
4	AWG 22... 12		
	6 / 3		
	A3 / V2		



0.5...4 / 1.5...4

0.5...4 / 0.5...4

0.6 0.8 (M.3)

$$8 / 35 \times 0.6$$

8 / 8.8 x 8.8

0.5...1.5 / 0.5...1.5

Type	Qty.	Order No.
KDKS 1/35	50	9503310000

Type	Current [A]	Qty.	Order No.
------	-------------	------	-----------

G 20/0.1A/F	10	0430300000
G 20/0.2A/F	10	0430400000
G 20/0.25A/F	10	0430500000
G 20/0.5A/F	10	0430600000
G 20/1A/F	10	0430700000
G 20/1.6A/F	10	0430800000
G 20/2A/F	10	0430900000
G 20/2.5A/F	10	0431000000
G 20/3.15A/F	10	0431100000
G 20/4.00A/F	10	0431200000
G 20/5.00A/F	10	0431300000
G 20/6.30A/F	10	0431400000

KOHUE ASK1	100	0553300000
------------	-----	------------