

EP7 Platform SMD




-  Push Pull Converter Transformer
-  Basic insulation for isolated power supply driver
-  4.0mm Creepage
-  4KVrms Isolation

Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C								
Part Number	Inductance (1-3) (mH ±45%)	Leakage Inductance (uH MAX)	Capacitance (pF MAX)	DCR (1-3) (Ω MAX)	DCR (4-6) (Ω MAX)	MAX (1-3) ¹ (V-μsec Max)	Turns Ratio (1:3) (6:4)	Isolated Voltage (Vrms)
PH9184.011NL	12.2	12.5	28.5	1.9	2.4	266	1CT : 1CT	4000
PH9184.021NL	15.0	15.0	26.5	2.1	1.4	296	2CT : 1CT	
PH9184.034NL	6.8	5.0	31.5	1.4	2.2	200	3CT : 4CT	

1. The maximum volt-use rating limits the peak flux density to 3600 gauss when used in bi-polar drive application with 200KHz. For unipolar drive applications or a bi-polar drive with 350kHz, a maximum volt-use could be 60% of the listed value. For Push-Pull topology, where the voltage is applied across half the primary winding turns, the maximum volts-use needs to be derated by 50%.
2. Optional Tape & Reel packing can be ordered by adding a “**T**” suffix to the part number (i.e. PH9184.011NL becomes PH9184.011NLT). Pulse complies to industry standard tape and reel specification EIA481.

-



Weight2.6grams
Tape & Reel150/reel
Tray80/tray


Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0.25}$

Application

PH9184NL is a series of high isolation power supply transformer drivers. Intended to operate in a fixed duty cycle Push Pull topology, it is a part of a low cost solution for delivering lower power (up to 3W) from a low voltage source. A typical implementation would be an isolated RS-485/RS-232 power supply driver circuit, the design is compatible with the MAXIM™ MAX253 IC.

A schematic diagram for the Push Pull converter topology is given below.

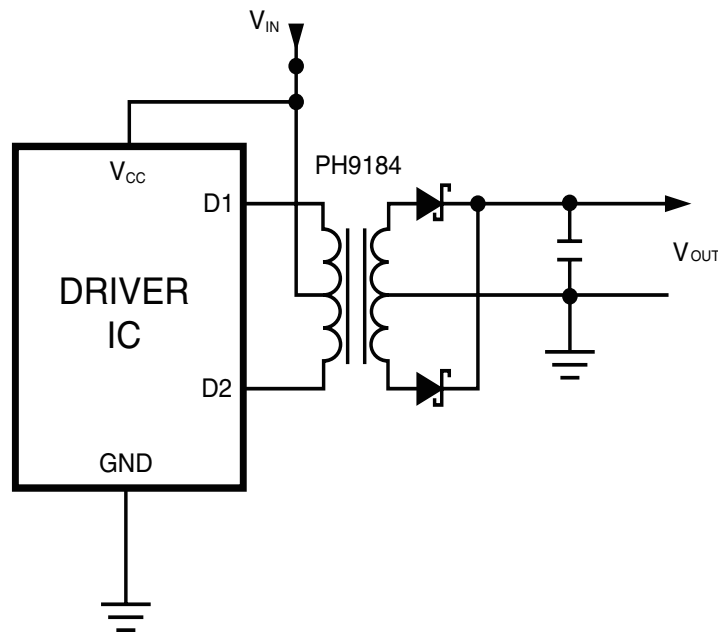

For a fixed 50% duty cycle mode of operation, the output voltage is simply determined by the input voltage and turns ratio. So, with the available turns ratios, a variety of output voltages can be selected.

This transformer design conforms to UL60950-1 2 edition with basic insulation for a working voltage up to 300Vac. 3.2mm creepage and 3000Vrms isolation voltage is guaranteed to meet this requirement. The actual isolation and creepage capability of the design exceeds these UL ratings.

MAXIM is a registered trademark of Maxim Integrated Products.

For More Information

Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100
San Diego, CA 92128
U.S.A.

Pulse Europe

Pulse Electronics GmbH
Am Rottland 12
58540 Meinerzhagen
Germany

Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD
D708, Shenzhen Academy of
Aerospace Technology,
The 10th Keji South Road,
Nanshan District, Shenzhen,
P.R. China 518057

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Pulse North Asia

1F., No.111 Xiyuan Rd
Zhongli City
Taoyuan City 32057
Taiwan (R.O.C)

Tel: 858 674 8100
Fax: 858 674 8262

Tel: 49 2354 777 100
Fax: 49 2354 777 168

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 21 62786973

Tel: 65 6287 8998
Fax: 65 6280 0080

Tel: 886 3 4356768
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2017. Pulse Electronics, Inc. All rights reserved.