


REVISIONS				DOC. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
564	A	RELEASED	HYO	3/24/00	JC	7/27/00	DJC	8/7/00	
1892	B	UPDATE TO ROHS COMPLIANT	EO	03/15/06	HO	3/15/06	HO	3/15/06	



RoHS
Compliant

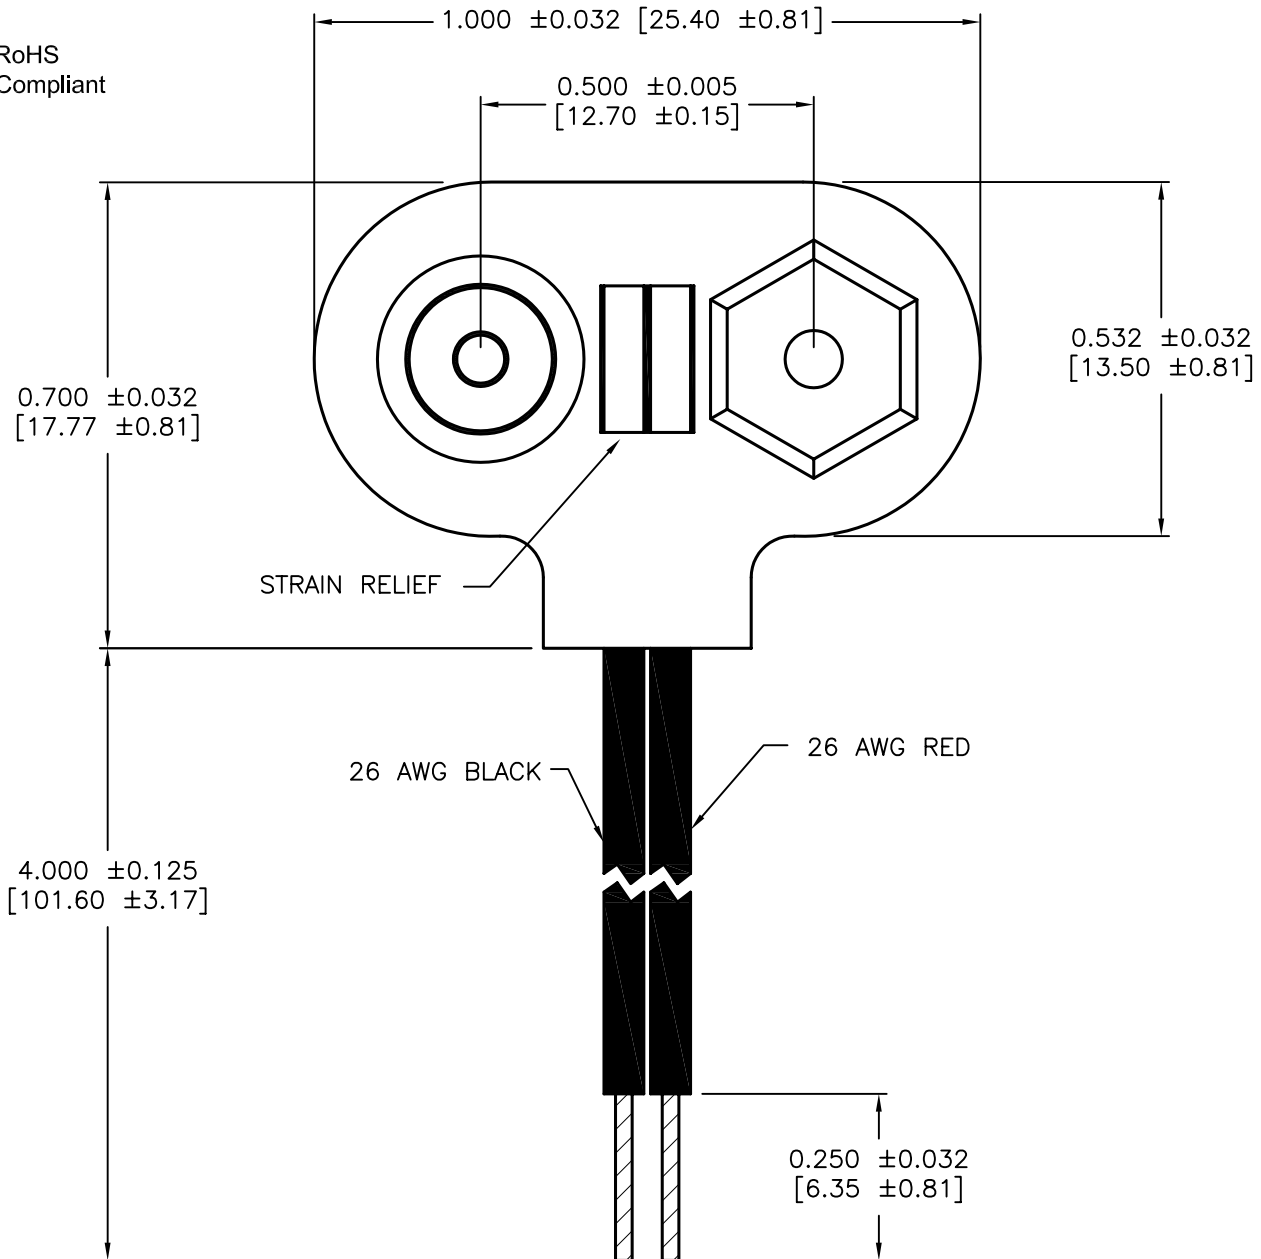

Specifications:

- 1- Wire: 26 AWG, 1007 UL/CSA approved
- 2- Contact: Brass, nickel plated, mounted on
0.012 [0.30] Min. thickness PVC
0.032 [0.81] thick fiber insulation
- 3- Red wire connected to female contact
- 4- Black wire connected to male contact.

SPC-F004.DWG

TOLERANCES: UNLESS OTHERWISE SPECIFIED DECIMAL .XXX ± 0.015 [0.38]	DRAWN BY:	DATE:	DRAWING TITLE:			
	HISHAM ODISH	3/24/00	ECONOMY 9 VOLT BATTERY STRAP			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	JOHN COLE	7/27/00	A	8459-0676	16N944.DWG	B
	APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: INCHES [mm]	SHEET: 1 OF 1
	DANIEL CAREY	8/7/00				

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.