


REVISIONS			DOC. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398						
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
564	A	RELEASED	HYO	3/24/00	JC	7/27/00	DJC	8/7/00	
1892	B	UPDATE TO ROHS COMPLIANT	EO	03/15/06	HO	3/15/06	HO	3/15/06	

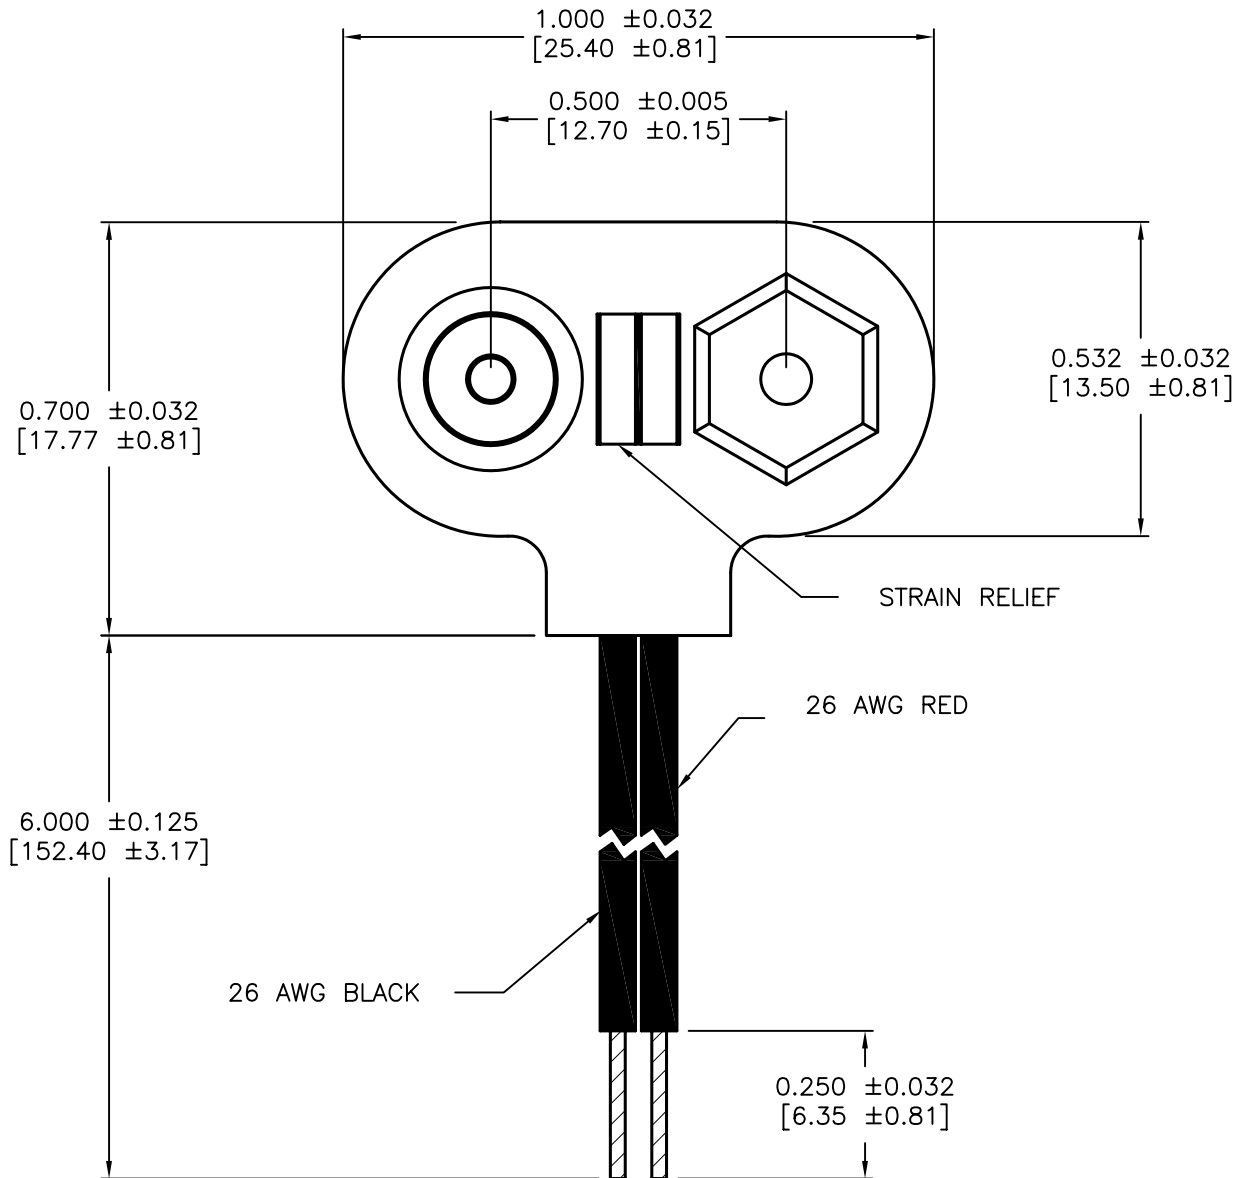

Specifications

- 1- Wire: 26 AWG, 1007 UL/CSA approved
- 2- Contact: Brass, nickel plated, mounted on .012 [0.30] Min. thickness PVC & .032 [0.81] thick fiber insulation
- 3- Red wire connected to female contact
- 4- black wire connected to male contact.

SPC-F004.DWG

TOLERANCES:		DRAWN BY:		DATE:		DRAWING TITLE:			
UNLESS OTHERWISE SPECIFIED DECIMAL .XXX ± 0.015 [0.38]		HISHAM ODISH		3/24/00		ECONOMY 9 VOLT BATTERY STRAP			
		CHECKED BY:		DATE:		SIZE	DWG. NO.	ELECTRONIC FILE	REV
		JOHN COLE		7/27/00		A	8459-0677	16N945.DWG	B
		APPROVED BY:		DATE:		SCALE: NTS		SHEET: 1 OF 1	
		DANIEL CAREY		8/7/00		U.O.M.: INCHES [mm]			

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.