

Darlington Transistor TO-3

multicompPRO



Description

Designed for use as output devices in complementary general purpose amplifier applications.

Features:

- High gain darlington performance
- High DC current gain $h_{FE} = 1,000$ (Minimum) at $I_C = 20A$
- Monolithic construction with built-in base-emitter shunt resistor

Maximum Ratings

Characteristic	Symbol	MJ11016	Unit
Collector-Emitter Voltage	V_{CEO}	120	
Collector-Base Voltage	V_{CBO}	120	V
Emitter-Base Voltage	V_{EBO}	5	
Collector Current -Continuous -Peak	I_C I_{CM}	30 50	A
Base Current	I_B	1	
Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	200 1.15	W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200	$^\circ C$

Thermal Characteristics

Characteristic	Symbol	Maximum	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	0.87	$^\circ C/W$

Darlington Transistor

TO-3

multicompPRO

Electrical Characteristics (TC = 25°C unless otherwise noted)

Characteristic	Symbol	Minimum	Maximum	Unit
Off Characteristics				
Collector-Emitter Sustaining Voltage (1) ($I_C = 100\text{mA}$, $I_B = 0$) MJ11016	$V_{EO(sus)}$	120	-	V
Collector Cutoff Current ($V_{CE} = 50\text{V}$, $I_B = 0$)	I_{CEO}	-	1	mA
Collector-Emitter Leakage Current ($V_{CE} = 120\text{V}$, $R_{BE} = 1\text{k}\Omega$) MJ11016 ($V_{CE} = 120\text{V}$, $R_{BE} = 1\text{k}\Omega$, $T_C = 125^\circ\text{C}$) MJ11016	I_{CER}	-	1 5	
Emitter Cutoff Current ($V_{EB} = 5\text{V}$, $I_C = 0$)	I_{EBO}	-	5	

On Characteristics (1)

DC Current Gain ($I_C = 20\text{A}$, $V_{CE} = 5\text{V}$) ($I_C = 30\text{A}$, $V_{CE} = 5\text{V}$)	h_{FE}	1,000 200	-	-
Collector-Emitter Saturation Voltage ($I_C = 20\text{A}$, $I_B = 200\text{mA}$) ($I_C = 30\text{A}$, $I_B = 300\text{mA}$)	$V_{CE(sat)}$	-	3 4	V
Base-Emitter Saturation Voltage ($I_C = 20\text{A}$, $I_B = 200\text{mA}$) ($I_C = 30\text{A}$, $I_B = 300\text{mA}$)	$V_{BE(sat)}$	-	3.5 5	

Dynamic Characteristics


Small-Signal Current Gain ($I_C = 10\text{A}$, $V_{CE} = 3\text{V}$, $f = 1\text{MHz}$)	$ h_{fe} $	4	-	-
--	------------	---	---	---

(1) Pulse Test : Pulse Width = 300 μs , Duty Cycle 2%.

(2) $f_T = |h_{fe}| \cdot f_{test}$.

Internal Schematic Diagram

NPN
MJ11016

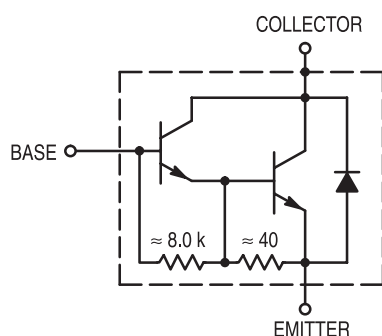


Darlington Transistor


T0-3

multicomp^{PRO}

Power Derating

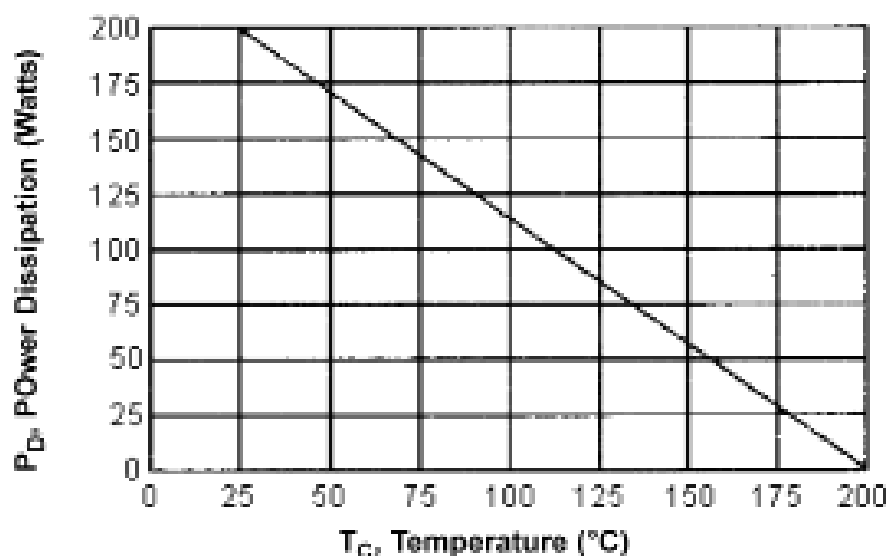

DC Current Gain

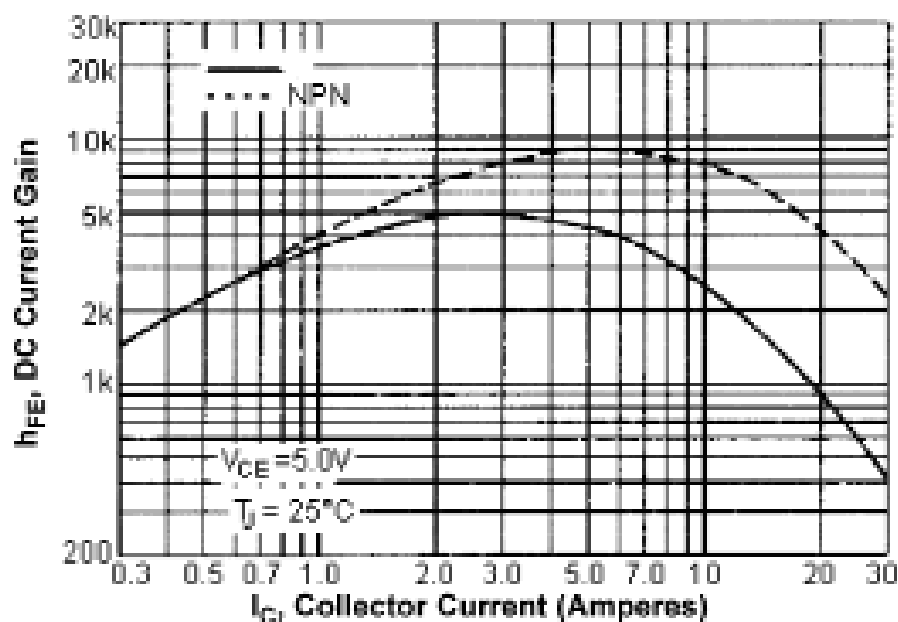


Darlington Transistor


T0-3

multicompPRO

Small-Signal Current Gain

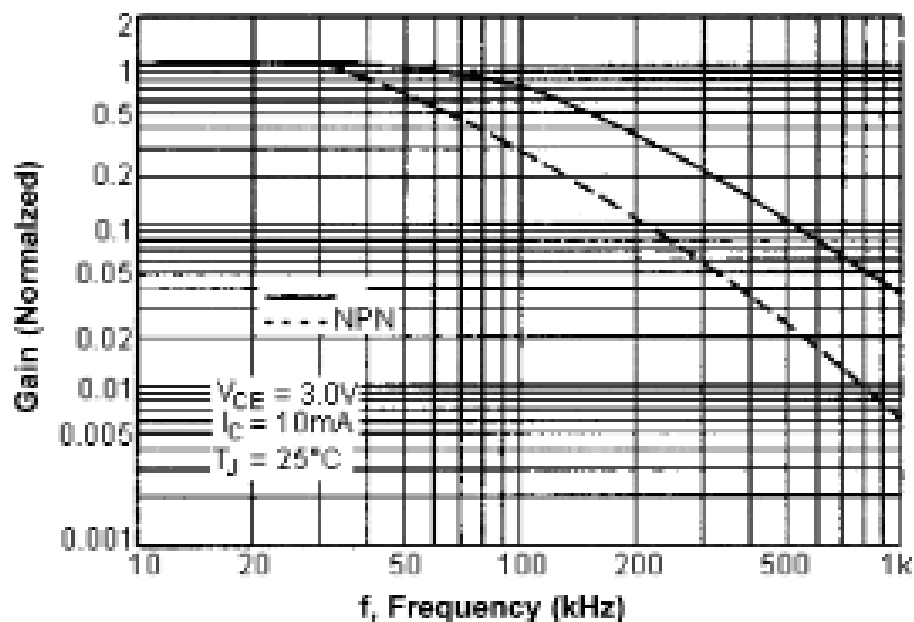

"ON" Voltages


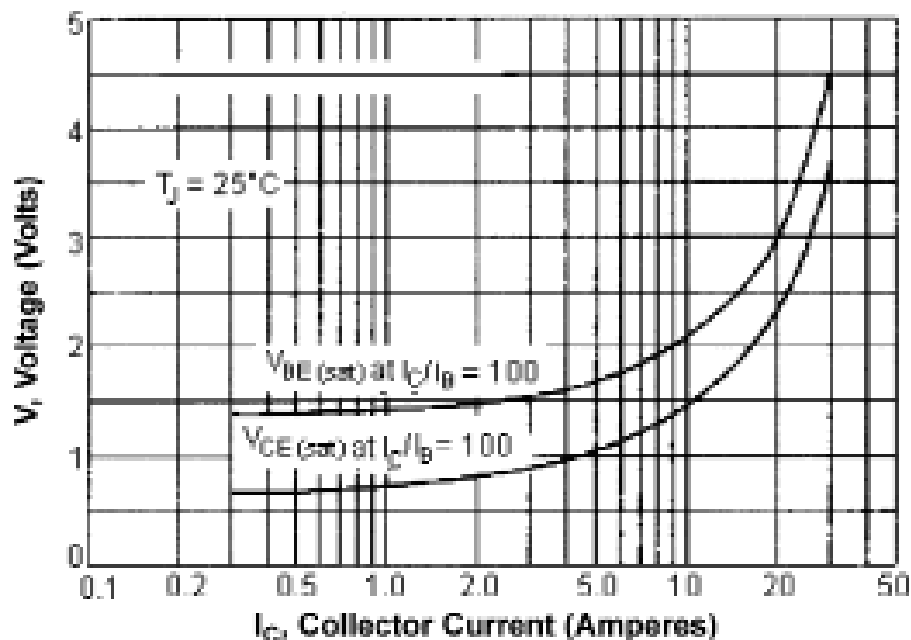


multicompPRO

Darlington Transistor

T0-3

multicompPRO

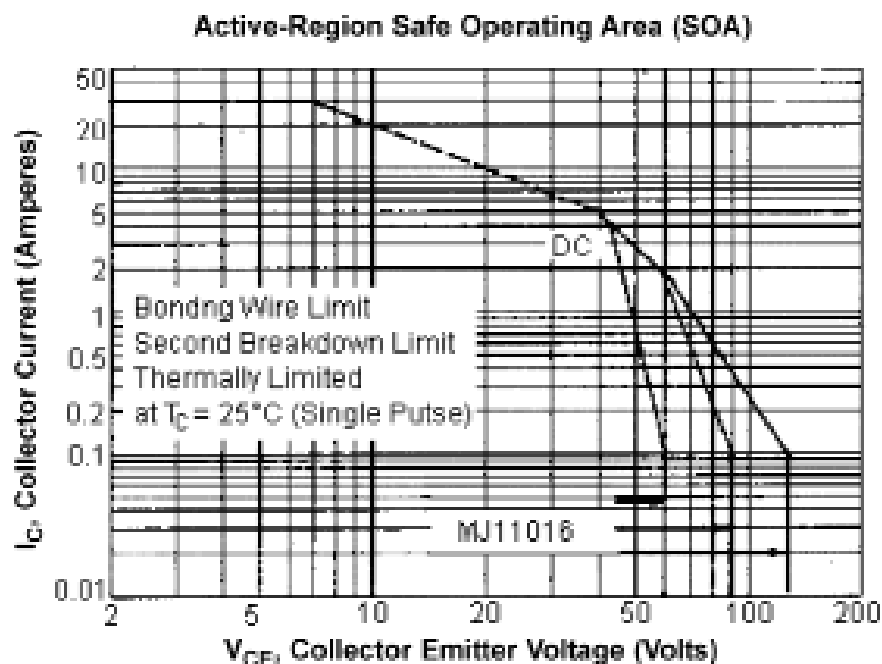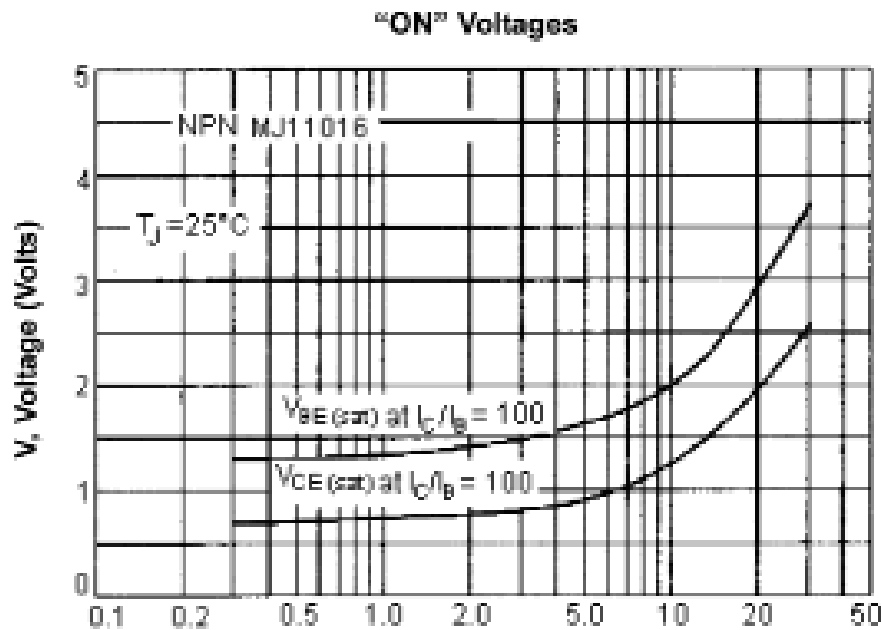


There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on $T_{J(PK)} = 200^\circ\text{C}$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 200^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

Darlington Transistor TO-3

multicompPRO

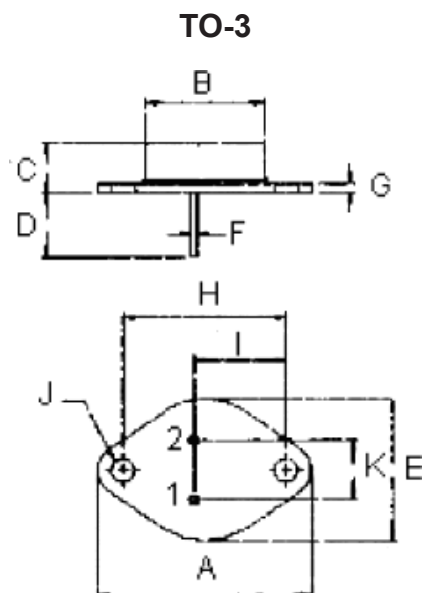

Dimensions	Minimum	Maximum
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.2	26.67
F	0.92	1.09
G	1.38	1.62
H	29.9	30.4
I	16.64	17.3
J	3.88	4.36
K	10.67	11.18

- Pin 1. Base
2. Emitter
3. Collector (Case)

Part Number Table

Description	Part Number
Darlington Transistor, TO-3	MJ11016

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO