




Features

- High DC current gain - $h_{FE} = 1,000$ (minimum) at $I_C = 20A$ DC
- Monolithic construction with built-in base emitter shunt resistor
- Junction temperature to $+200^{\circ}C$



(TO-3)
Case 1-07
Style 1

Absolute Maximum Ratings

Parameter	Symbol	Values	Unit
Collector-Emitter Voltage	V_{CEO}	120	V
Collector - Base Voltage	V_{CB}		
Emitter-Base Voltage	V_{EB}		
Collector Current	I_C	30	A DC
Base Current	I_B	1	
Total Power Dissipation at $T_C = 25^{\circ}C$ Derate above $25^{\circ}C$ at $T_C = 100^{\circ}C$	P_D	200 1.15	W W / $^{\circ}C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200	$^{\circ}C$

Thermal Characteristics

Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.17	$^{\circ}C / W$
Maximum Lead Temperature for Soldering Purposes for ≤ 10 Seconds	T_L	275	$^{\circ}C$

Stresses exceeding maximum ratings may damage the device. Maximum ratings are stress ratings only. Functional operation above the recommended operating conditions is not implied. Extended exposure to stresses above the recommended operating conditions may affect device reliability.






Electrical Characteristics ($T_C = 25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Minimum	Maximum	Unit
Off Characteristics				
Collector-Emitter Sustaining Voltage (1) (I _C = 100mA DC, I _B = 0)	V _{CEO} (SUS)	120	-	V DC
Collector - Emitter Leakage Current (V _{CE} = 120V DC, R _{BE} = 1kΩ) (V _{CE} = 120V DC, R _{BE} = 1kΩ, T _C = 150°C)	I _{CER}	-	1 5	mA DC
Emitter Cut off Current (V _{BE} = 5V DC, I _C = 0)	I _{EBO}	-	5	
Emitter-Base Cut off Current (V _{EB} = 8V, I _C = 0)	I _{CEO}	-	1	
On Characteristics (1)				
DC Current Gain (I _C = 20A DC, V _{CE} = 5V DC (I _C = 30A DC, V _{CE} = 5V DC)	h _{FE}	1,000 200	- -	-
Collector-Emitter Saturation Voltage (I _C = 20A DC, I _B = 200mA DC) (I _C = 30A DC, I _B = 300mA DC)	V _{CE} (sat)	-	3 4	V DC

Parameter	Symbol	Minimum	Maximum	Unit
Base - Emitter Saturation Voltage ($I_C = 20A$ DC, $I_B = 200mA$ DC) ($I_C = 30A$ DC, $I_B = 300mA$ DC)	$V_{BE} (sat)$	-	3.5 5	V DC
Dynamic Characteristics				
Current Gain-Bandwidth Product (2) ($I_C = 10A$, $V_{CE} = 3V$ DC, $f = 1MHz$)	h_{fe}	4	-	MHz

(1) Pulse Test : Pulse Width = 300 μs , Duty Cycle $\leq 2\%$


Darlington Circuit Schematic

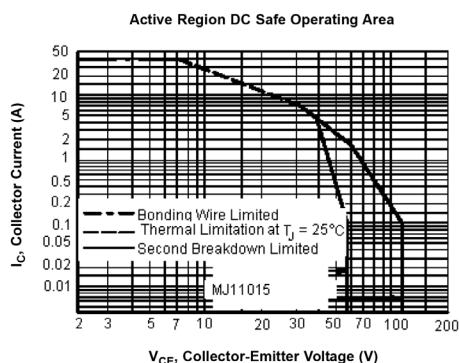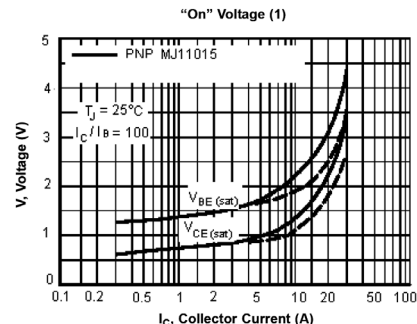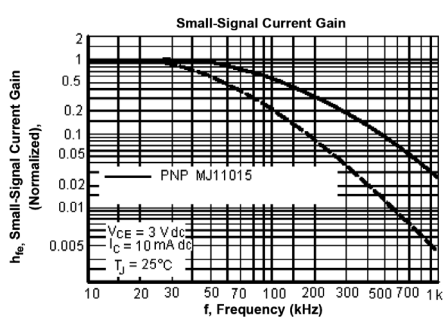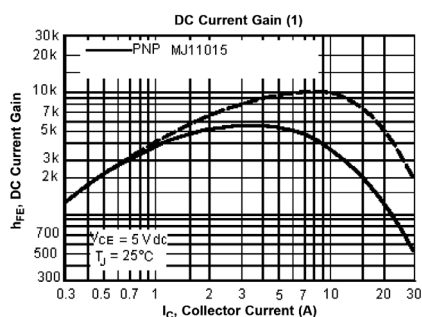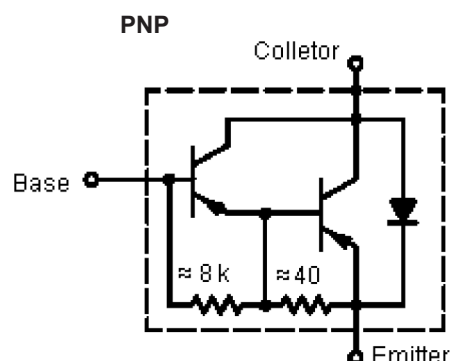

There are two limitations on the power handling ability of a transistor average junction temperature and secondary breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operations e.g., the transistor must not be subjected to greater dissipation than the curves indicate.

At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by secondary breakdown

Diagram

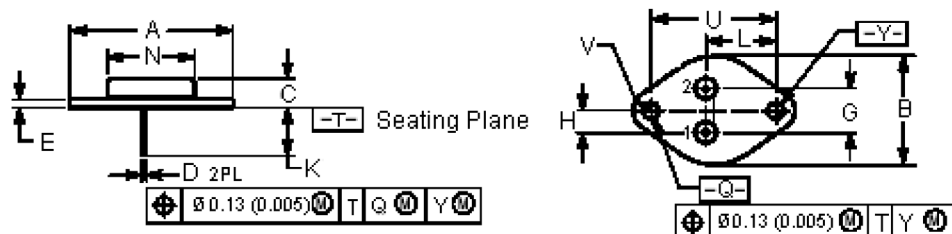

Dimensions	Minimum	Maximum
A	1.55 (39.37)	Reference
B	-	1.05 (26.67)
C	0.25 (6.35)	0.335 (8.51)
D	0.038 (0.97)	0.043 (1.09)
E	0.055 (1.4)	0.07 (1.77)
G	0.43 (10.92)	BSC
H	0.215 (5.46)	BSC
K	0.44 (11.18)	0.48 (12.19)
L	0.665 (16.89)	BSC
N	-	0.83 (21.08)
Q	0.151 (3.84)	0.165 (4.19)
U	1.187 (30.15)	BSC
V	0.131 (3.33)	0.188 (4.77)

Dimensions : Inches (Millimetres)

Style 1:
Pin 1. Base
2. Emitter
Collector (Case)

Part Number Table

Description	Part Number
Darlington Transistor, TO-3	MJ11015

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.