

G3VM-81HR/101HR

MOS FET Relays SOP 6-pin, High-current and Low-ON-resistance Type

MOS FET Relays in SOP 6-pin packages that achieve the low ON resistance and high switching capacitance of a mechanical relay

- Load voltage: 80 V/100 V
- 80-V Relay: Continuous load current of 1.25 A (2.5 A) max. *
- 100-V Relay: Continuous load current of 3 A (6 A) max. *

* Values in parentheses are for connection C.

Note: The actual product is marked differently from the image shown here.

RoHS Compliant


Application Examples

- Semiconductor test equipment
- Security equipment
- Amusement equipment
- Communication equipment
- Industrial equipment
- Test & Measurement equipment
- Power circuit

Package

(Unit : mm, Average)

SOP 6-pin



Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load Voltage

8 : 80 V

10 : 100 V

2. Contact form

1 : 1a (SPST-NO)

3. Package

H : SOP 6-pin

4. Additional functions

R: Low ON resistance

5. Other informations

When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *		Stick packaging		Tape packaging	
				Connection A, B	Connection C	Model	Minimum package quantity	Model	Minimum package quantity
SOP6	1a (SPST-NO)	Surface-mounting Terminals	80 V	1.25 A	2.5 A	G3VM-81HR	75	G3VM-81HR(TR)	2,500
			100 V	1.4 A	2.8 A	G3VM-101HR		G3VM-101HR(TR)	
			100 V	2 A	4 A	G3VM-101HR1		G3VM-101HR1(TR05)	500
			100 V	3 A	6 A	G3VM-101HR2		G3VM-101HR2(TR05)	

* The AC peak and DC value are given for the load voltage and continuous load current.


Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)", "(TR05)" to the end of the model number.

Absolute Maximum Ratings (Ta = 25°C)

Item			Symbol	G3VM-81HR	G3VM-101HR	G3VM-101HR1	G3VM-101HR2	Unit	Measurement conditions
Input	LED forward current		IF	50	30			mA	
	LED forward current reduction rate		ΔIF/°C	-0.5	-0.3			mA/°C	Ta ≥ 25°C
	LED reverse voltage		VR	5			6	V	
	Connection temperature		TJ	125				°C	
Output	Load voltage (AC peak/DC)		VOFF	80	100			V	
	Continuous load current	Connection A	Io	1.25	1.4	2	3	A	Connection A: AC peak/DC Connection B and C: DC
		Connection B							
		Connection C		2.5	2.8	4	6		
	ON current reduction rate	Connection A	ΔIo/°C	-12.5	-18.7	-20	-30	mA/°C	G3VM-101HR : Ta ≥ 50°C Others : Ta ≥25°C
		Connection B							
		Connection C		-25.0	-37.3	-40	-60		
	Pulse ON current		Iop	3.75	4	6	9	A	t=100 ms, Duty=1/10
	Connection temperature		TJ	125				°C	
Dielectric strength between I/O *		VI-o	1,500				Vrms	AC for 1 min	
Ambient operating temperature		Ta	-20 to +85	-40 to +85		-40 to +110	°C	With no icing or condensation	
Ambient storage temperature		Tstg	-40 to +125	-55 to +125			°C		
Soldering temperature		—	260				°C	10 s	

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

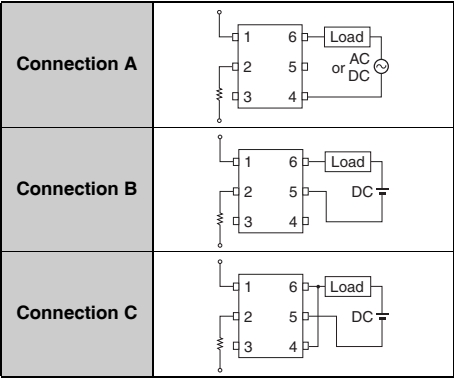


SOP

G3VM-81HR/101HR

■Electrical Characteristics (Ta = 25°C)

Item			Symbol		G3VM-81HR	G3VM-101HR	G3VM-101HR1	G3VM-101HR2	Unit	Measurement conditions
Input	LED forward voltage		V _F	Minimum	1.0	1.18		1.5	V	I _F =10 mA
				Typical	1.15	1.33		1.65		
				Maximum	1.3	1.48		1.8		
	Reverse current		I _R	Maximum	10				μA	V _R =5 V
	Capacitance between terminals		C _T	Typical	15	70			pF	V=0, f=1 MHz
	Trigger LED forward current		I _{FT}	Typical	2	0.4		0.35	mA	G3VM-81HR : I _o =1250 mA Others : I _o =100 mA
				Maximum	5	3				
Release LED forward current		I _{FC}	Minimum	0.2	0.1			mA	I _{OFF} =10 μA	
Output	Maximum resistance with output ON	Connection A	R _{ON}	Typical	0.11	0.1	0.045	0.05	Ω	G3VM-81HR : I _F =5 mA, I _o = Continuous load current ratings Others : I _F =5 mA, I _o = Continuous load current ratings, t < 1 s
		Connection B			0.06	0.05	0.022	0.025		
		Connection C			0.03	0.025	0.011	0.013		
		Connection A	Maximum	0.15	0.2	0.07	0.065			
		Connection B		0.08	0.1	0.035	0.033			
		Connection C		0.04	—	0.018	0.016			
	Current leakage when the relay is open		I _{LEAK}	Typical	1.2	—	—	—	nA	G3VM-81HR : V _{OFF} =20 V, T _a =50°C Others : V _{OFF} = Load voltage ratings
				Maximum	1.5	10	1,000			
	Capacitance between terminals		C _{OFF}	Typical	460	1,000	500	460	pF	G3VM-81HR : V=0, f=100 MHz Others : V=0, f=1 MHz
				Maximum	1,000	—	—	—		
Capacitance between I/O terminals		C _{I-O}	Typical	0.8				pF	f=1 MHz, V _S =0 V	
Insulation resistance between I/O terminals		R _{I-O}	Minimum	1,000				MΩ	V _{I-O} =500 VDC, R _{oH} ≤60%	
			Typical	10 ⁸						
Turn-ON time		t _{ON}	Typical	2.0	1.0	1.1	0.45	ms	I _F =5 mA, R _L =200 Ω, V _{DD} =20 V *	
			Maximum	3.0	5.0		2			
Turn-OFF time		t _{OFF}	Typical	0.7	0.15	0.1				
			Maximum	1.0			0.5			

* Turn-ON and Turn-OFF Times



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-81HR	G3VM-101HR	G3VM-101HR1	G3VM-101HR2	Unit
Load voltage (AC peak/DC)	VDD	Maximum	64	100	80		V
Operating LED forward current	IF	Minimum	5				mA
		Typical	—	7.5	10		
		Maximum	30	20	25		
Continuous load current (AC peak/DC)	Io	Maximum	1.25	1.1	2	3	A
Ambient operating temperature	Ta	Minimum	25	-20			°C
		Maximum	60	65	85		

■Spacing and Insulation


Item	Minimum	Unit
Creepage distances	4.0	mm
Clearance distances	4.0	
Internal isolation thickness	0.1	

Engineering Data


LED forward current vs. Ambient temperature G3VM-81HR/101HR/101HR1

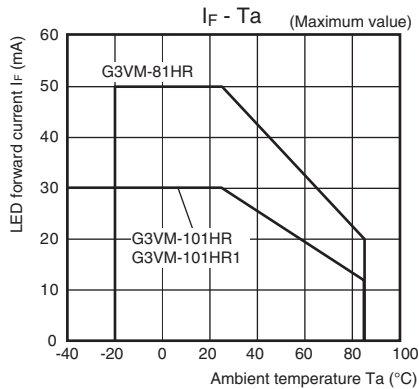


G3VM-101HR2

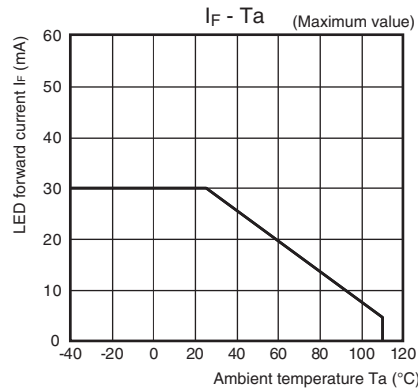


Continuous load current vs. Ambient temperature G3VM-101HR/101HR1

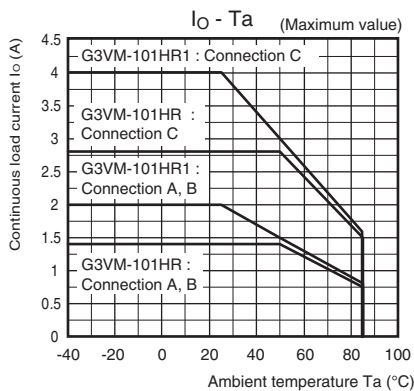


G3VM-81HR

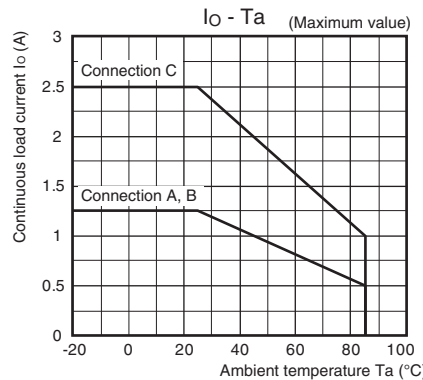


G3VM-101HR2

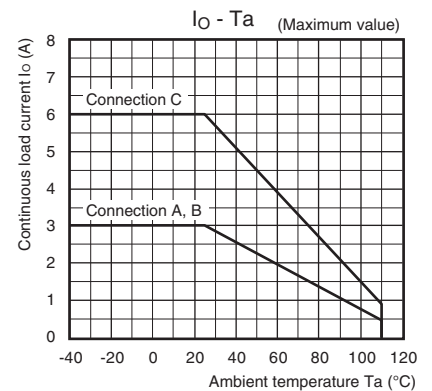


LED forward current vs. LED forward voltage G3VM-81HR/101HR/101HR1

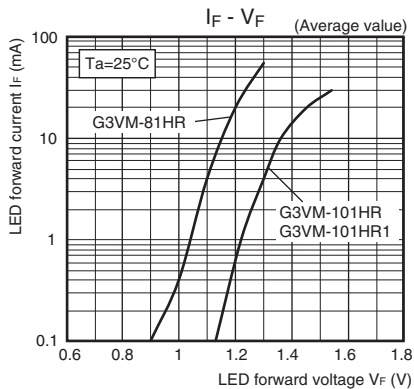


G3VM-101HR2

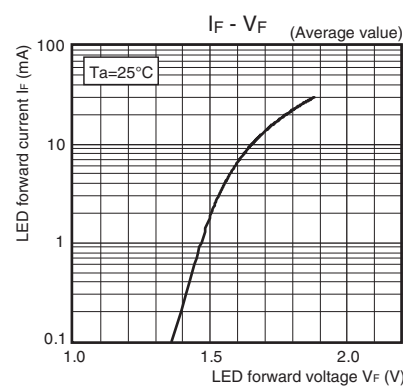


Continuous load current vs. On-state voltage G3VM-81HR/101HR/101HR1

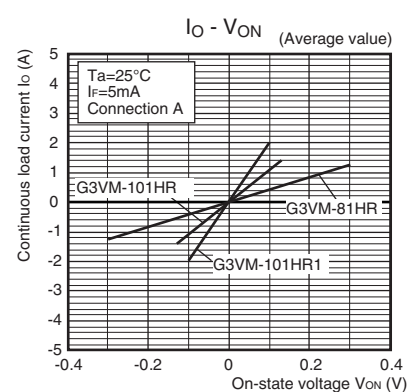

G3VM-101HR2

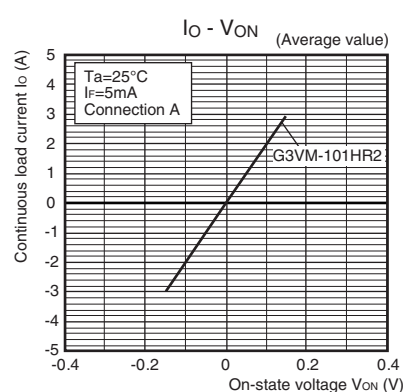


On-state resistance vs. Ambient temperature

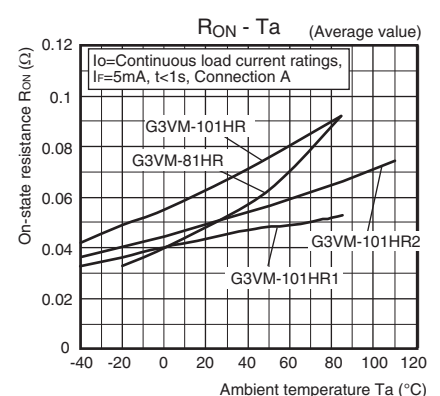


Engineering Data


● Trigger LED forward current vs. Ambient temperature G3VM-101HR/101HR1/101HR2

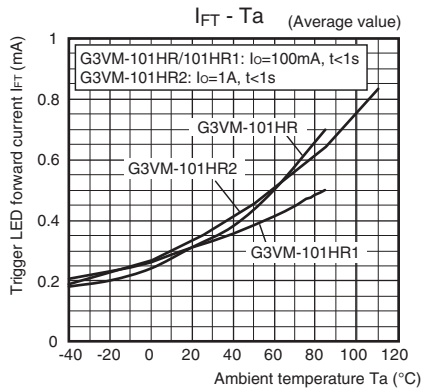


G3VM-81HR

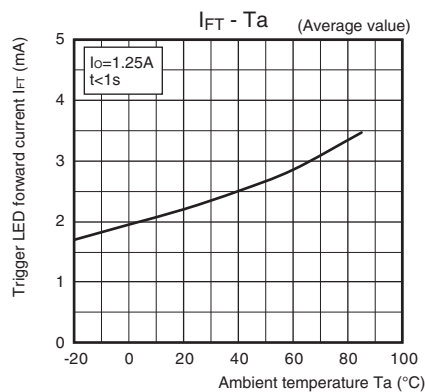


● Turn ON, Turn OFF time vs. LED forward current G3VM-81HR/101HR/101HR1

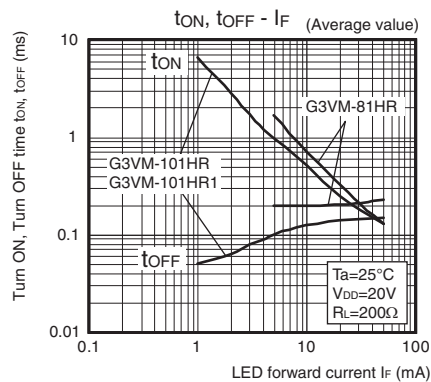


G3VM-101HR2

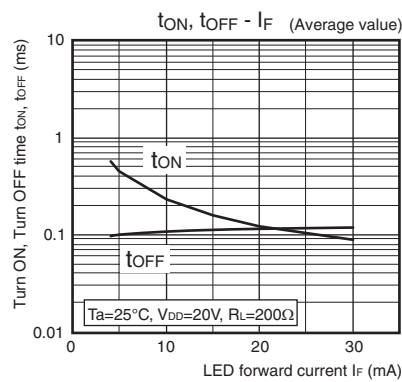


● Turn ON, Turn OFF time vs. Ambient temperature G3VM-81HR/101HR/101HR1

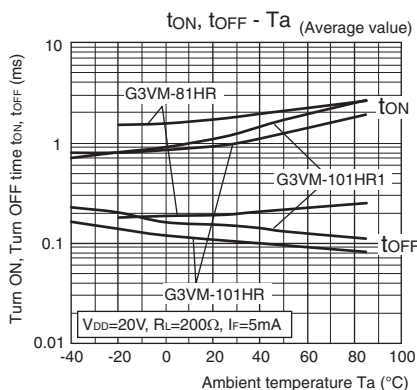


G3VM-101HR2

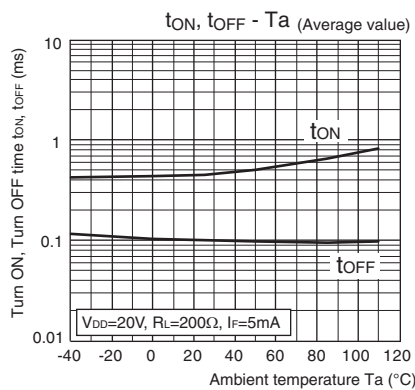


● Current leakage vs. Load voltage G3VM-101HR

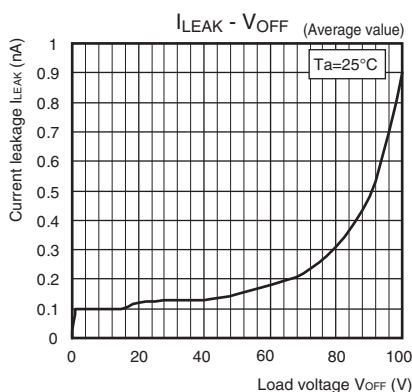


G3VM-101HR2

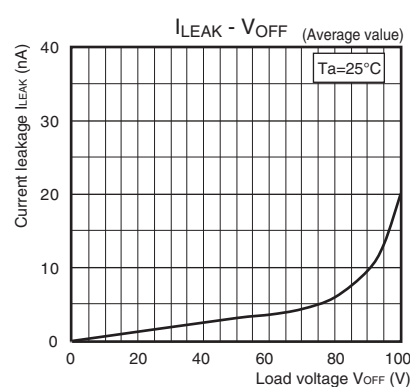


● Current leakage vs. Ambient temperature G3VM-81HR/101HR1

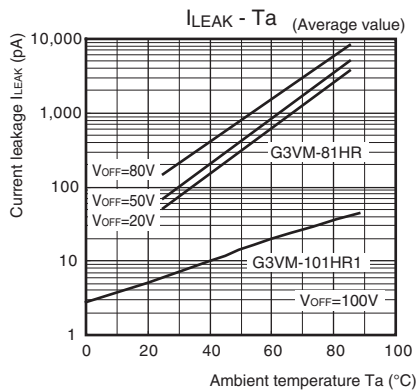

G3VM-101HR2

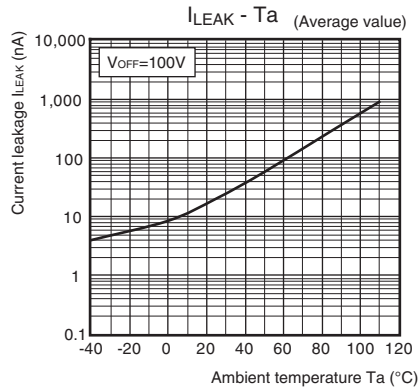

● Output terminal capacitance vs. Load voltage G3VM-101HR/101HR2

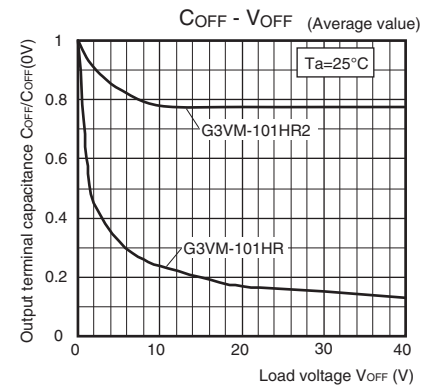


■ Appearance / Terminal Arrangement / Internal Connections

● Appearance


SOP (Small Outline Package)

SOP 6-pin

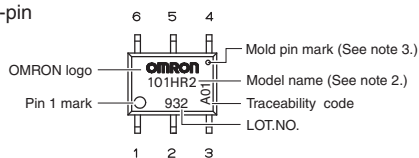


- Note:** 1. The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

● Terminal Arrangement/Internal Connections (Top View)




■ Dimensions (Unit: mm)




Surface-mounting Terminals

Weight: 0.13 g

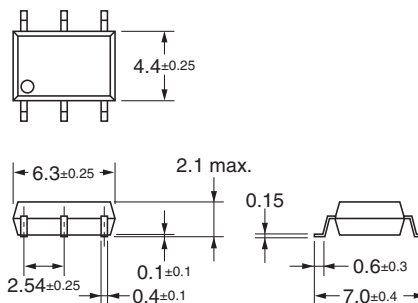

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■ Approved Standards

UL recognized



Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

Note: Applying G3VM-101HR2 for UL recognition

■ Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

S
O
P

G
3
V
M
-
8
1
H
R
/
1
0
1
H
R
□

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Electronic and Mechanical Components Company

Regional Contact	
Americas https://www.components.omron.com/	Europe http://components.omron.eu/
Asia-Pacific https://ecb.omron.com.sg/	China https://www.ecb.omron.com.cn/
Korea https://www.omron-ecb.co.kr/	Japan https://www.omron.co.jp/ecb/