

Switchmode Power Supplies

MPP Series

with exchangeable primary adapters

All products conform to IEC 60950

Applications

- Weighing technology
- WLAN modems
- Bluetooth
- Communication accessories
- Measurement technology
- LED applications
- Laser technology
- IT accessories
- Safety technology

Characteristics

- Universal input 100 to 240 V AC
- Constant voltage, current limited
- Exchangeable primary adapters
- Low standby power ≤ 0.3 Watts
- Continuously short circuit proof
- High efficiency

Technical data

Input voltage

Input current

Frequency

Efficiency

EMC

100 to 240 V AC ($\pm 10\%$)

150 mA (MPP 6),

400 mA (MPP 15),

700 mA (MPP 30)

50 to 60 Hz

80 % typ. at full load, resp. 75 % (MPP 6)

Conforms to

EN 55011, EN 55022/B,

FCC 47 part 15, EN 61000-3-2,

EN 61000-4-2, EN 61000-4-3,

EN 61000-4-4, EN 61000-4-5,

EN 61000-4-6, EN 61000-4-11

$\pm 5\%$

Output voltage tolerance

Environmental specification

Operating temperature

Storage temperature

Humidity

Input transient susceptibility

0 to 40° C at maximum load

-40 to 70° C

5 % to 95 % non condensing

Complies with IEC 61000 requirements

Safety specification

Standards

Fulfils Class II SELV for the following applications: EN 60950/IEC 60950, UL 60950, CSA 950 (cUL), VDE, CE label

Reliability specification

MTBF calculation

200,000 hours at maximum load and an ambient temperature of 25° C (in accordance with MIL-HDBK-217)

Mechanical specification

Weight approx.

Plug connector

100 g (MPP 6), 160 g (MPP 15), 255 g (MPP 30)

AC input:

FRIWO exchangeable mains plug system:

EURO, UK, USA/Japan, Australia, IEC

DC output:

Universal output plug system (page 30)

For primary adapters see page 30

MPP 6 FW 7650




MPP 15 FW 7555



MPP 30 FW 7530




6 Watts

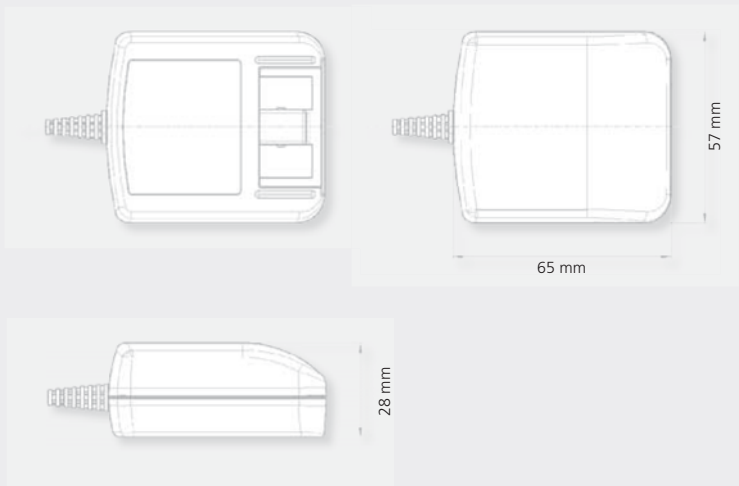


Output data			Worldwide
Voltage	Current	Ripple Voltage	Order No.
5 V	1000 mA	200 mV pp	1814926
6 V	850 mA	180 mV pp	1814927
7.5 V	650 mA	150 mV pp	1814928
9 V	550 mA	150 mV pp	1814929
12 V	450 mA	150 mV pp	1814930
15 V	360 mA	150 mV pp	1814931
18 V	300 mA	150 mV pp	1814932
24 V	220 mA	150 mV pp	1814933

15 Watts

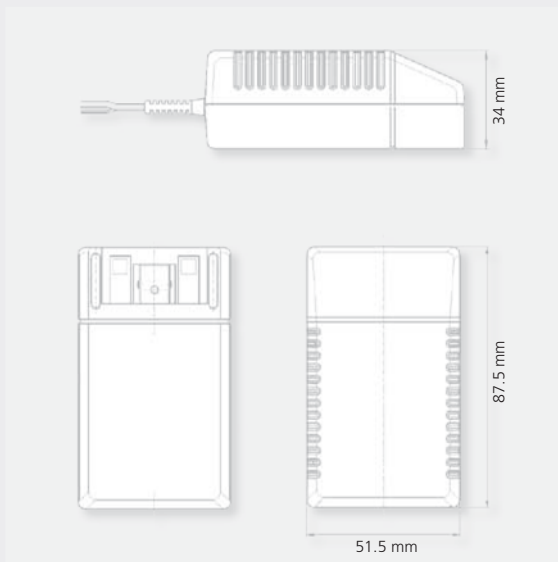

Output data			Worldwide
Voltage	Current	Ripple Voltage	Order No.
5 V	3000 mA	75 mV pp	1894100
6 V	2500 mA	75 mV pp	1894101
7.5 V	2000 mA	75 mV pp	1894102
9 V	1500 mA	90 mV pp	1811970
12 V	1250 mA	120 mV pp	1811971
15 V	1000 mA	150 mV pp	1812039
18 V	840 mA	180 mV pp	1812040
24 V	625 mA	240 mV pp	1812041

30 Watts

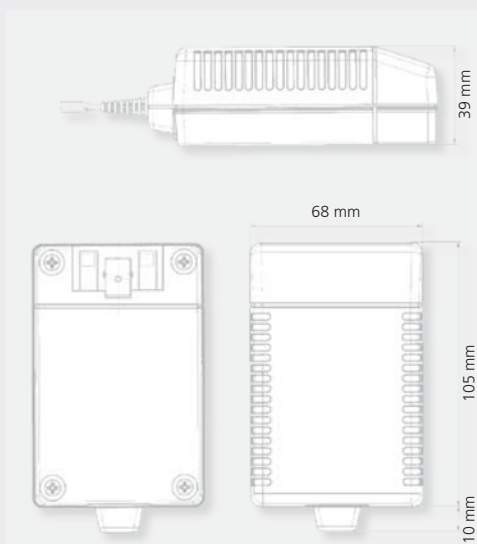

Output data			Worldwide
Voltage	Current	Ripple Voltage	Order No.
5 V	5000 mA	50 mV pp	1894090
6 V	4200 mA	60 mV pp	1894091
7.5 V	3600 mA	75 mV pp	1894092
9 V	3000 mA	90 mV pp	1894093
12 V	2500 mA	120 mV pp	1894094
15 V	2000 mA	150 mV pp	1894095
18 V	1650 mA	180 mV pp	1894096
24 V	1250 mA	240 mV pp	1894097