

Encapsulated PSU


KAM10 Series




Features:

- AC / DC power module
- Universal input 85 to 265 V ac
- High efficiency up to 78%
- Short circuit protection
- Internal input filter
- 2 years warranty

Block Diagram for KAM10 Series with Single Output

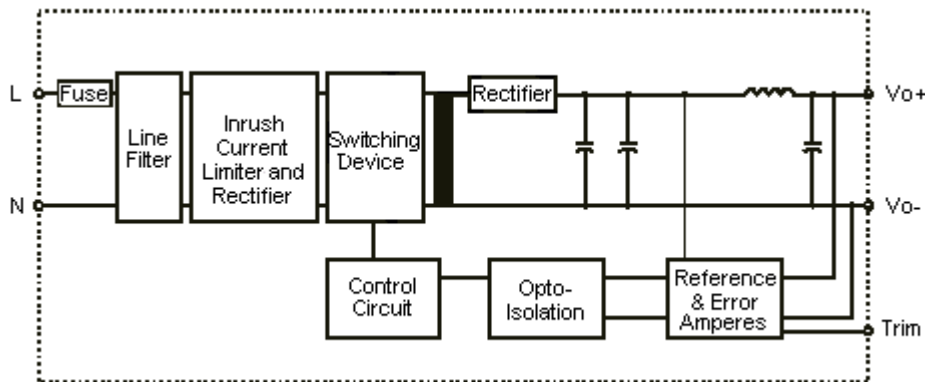

Block Diagram for KAM10 Series with Dual Output

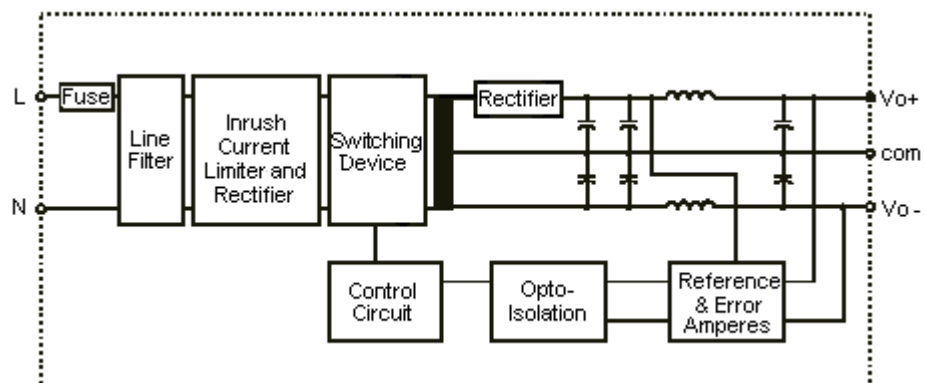

Encapsulated PSU

KAM10 Series



Specifications:

All specifications typical at nominal line, full load, 25°C unless otherwise noticed

Characteristics	Conditions	Minimum	Typical	Maximum	Unit
Switching frequency	Vi nominal, Io nominal	-	100	-	KHz
Isolation voltage	Input / output	3,000	-	-	V ac
Isolation resistance	Input / output, at 500 V dc	100	-	-	MΩ
Ambient temperature	Operating at Vi nominal, Io nominal	-20	-	+71	°C
Case temperature		-	-	+80	-
Derating	Vi nominal, Io nominal +51 to +71°C	-	-	2	% / °C
Storage temperature	Non-operational	-40	-	+100	°C
MTBF	According to MIL-HDBK-217F, GF40	-	255,000	-	Hrs
Relative humidity	Vi nominal, Io nominal	-	-	95	% RH
Dimension	(L) 76.2 × (W) 50.8 × (H) 22.6	-	-	-	mm
Cooling	Free air convection	-	-	-	-
Case material	Plastic	-	-	-	-

Input Specifications

Characteristics	Conditions		Minimum	Typical	Maximum	Unit
Rated input voltage	Io nominal		85	-	265	V ac
Input voltage range	Io nominal	AC in		-		
		DC in	120	-	370	V dc
Line frequency	Vi nominal, Io nominal		47	-	63	Hz
Inrush current	Io nominal	Vi : 115 V ac	-	-	10	A
		Vi : 230 V ac	-	-	18	

Output Specifications

Characteristics	Conditions		Minimum	Typical	Maximum	Unit
Output voltage accuracy	Vi nominal, Io nominal		-	-	±2	%
Minimum load	Vi nominal	single output models	0	-	-	
		dual output models (each output)	20	-	-	
Line regulation	Io nominal, Vi minimum to Vi maximum		-	-	±1	
	Vi nominal	single output models	-	-	±2	
Load regulation	Io minimum to Io nominal	dual output models	-	-		
Transient recovery time	Vi nominal, Io nominal = I ⇔ 0.5 Io nominal		-	1,000	-	µS
Temperature coefficient	Vi nominal, Io nominal		-	-	±0.02	%/°C
Ripple and noise	Vi nominal, Io nominal, BW = 20 MHz	3.3 V models	-	-	-100	mV
		5 V to 24 V models	Vout x 1% p-p maximum			
External trim ADJ Range I) (for single output only)	Io = 5% to 100%	3.3 V models	-5	-	+5	%
		5 V to 24 V models	-10	-	+10	
Efficiency	Vi nominal, Io nominal, Po / Pi		Up to 78%			

Encapsulated PSU




KAM10 Series

Control Protection

Input fuse	T2A / 250 V ac internal
Output short circuit	By current limited

Mechanism and Pin Configuration

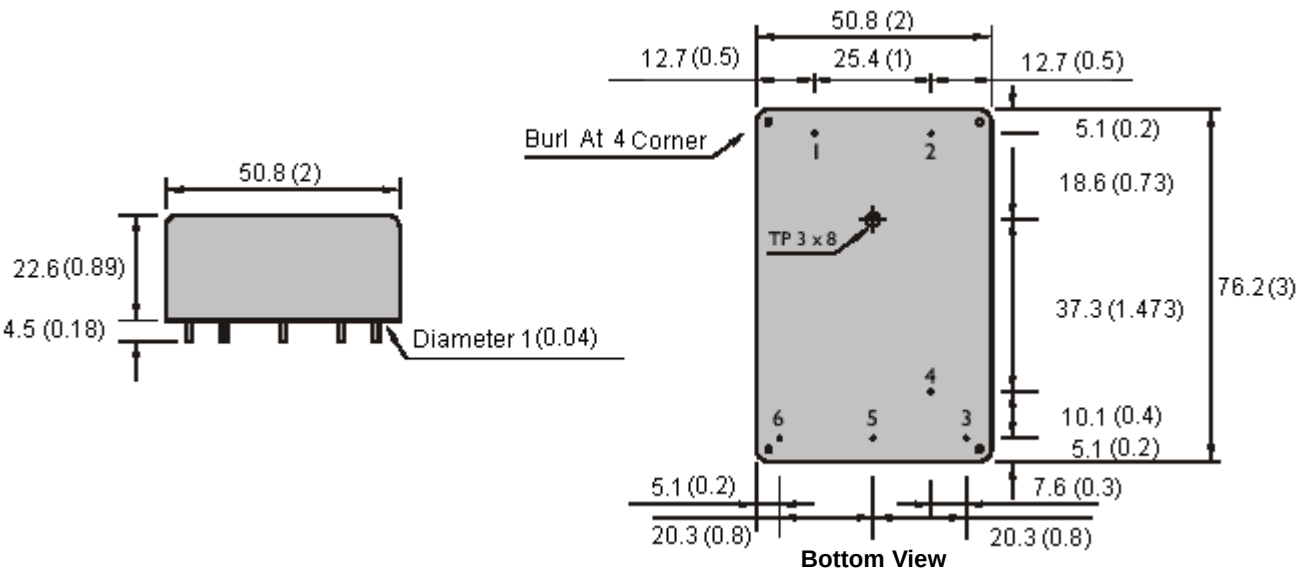




Physical Characteristics

Case size	76.2 × 50.8 × 22.6 mm (3 × 2 × 0.89 inches)
Case material	Plastic
Weight	160 g

General Pin Assignment

Pin Number	1	2	3	4	5	6
Single	AC IN	AC IN	Vo-	Trim	No Pin	Vo+
Dual	AC IN	AC IN	Vo- or +3.3V	No Pin	com	Vo+ or +5V

Derating

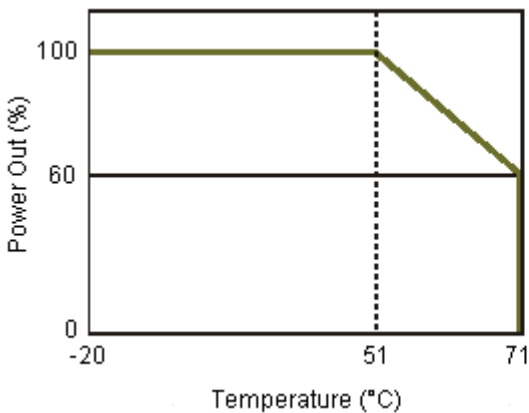

Encapsulated PSU

KAM10 Series



Typical Resistor Values for Various Output Voltage Adjustment Settings

Type	Rext 1		Rext 2	
	Uo Nominal -5% (K Ω)	Uo Nominal -10% (K Ω)	Uo Nominal +5% (K Ω)	Uo Nominal +10% (K Ω)
KAM 1005	39	15	9.1	2.2
KAM 1012	51	20	10	2
KAM 1024	130	56	12	2

Specification Table

Description	Type	Input Voltage (V ac)	Output Wattage (Watts)	Output Voltage (V dc)	Output Current (mA)	EFF (Typical) (%)	EFF (Minimum) (%)	Part Number
PSU, Encapsulated	Single output	85 to 265	10	+5	2,000	72	70	KAM1005
				+12	840	77	75	KAM1012
	Dual output			+12	±420			KAM1012D
				+15	±335		74	KAM1015D
	Single output			+24	420	78	76	KAM1024

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.