



SIRIUS soft starter 200-600 V 143 A, 24 V AC/DC spring-type terminals Analog output

|   |  |
|---|--|
| <b>product brand name</b>                               | SIRIUS   |
| <b>product category</b>                                 | Hybrid switching devices   |
| <b>product designation</b>                              | Soft starter   |
| <b>product type designation</b>                         | 3RW52  |
| <b>manufacturer's article number</b>                    | <ul style="list-style-type: none"> <li>• of standard HMI module usable <a href="#">3RW5980-0HS00</a></li> <li>• of high feature HMI module usable <a href="#">3RW5980-0HF00</a></li> <li>• of communication module PROFINET standard usable <a href="#">3RW5980-0CS00</a></li> <li>• of communication module PROFIBUS usable <a href="#">3RW5980-0CP00</a></li> <li>• of communication module Modbus TCP usable <a href="#">3RW5980-0CT00</a></li> <li>• of communication module Modbus RTU usable <a href="#">3RW5980-0CR00</a></li> <li>• of communication module Ethernet/IP <a href="#">3RW5980-0CE00</a></li> <li>• of circuit breaker usable at 400 V <a href="#">3VA2220-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of circuit breaker usable at 400 V at inside-delta circuit <a href="#">3VA2325-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10</a></li> <li>• of the gG fuse usable up to 690 V <a href="#">3NA3244-6; Type of coordination 1, Iq = 65 kA</a></li> <li>• of the gG fuse usable at inside-delta circuit up to 500 V <a href="#">3NA3244-6; Type of coordination 1, Iq = 65 kA</a></li> <li>• of full range R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE1227-0; Type of coordination 2, Iq = 65 kA</a></li> <li>• of back-up R fuse link for semiconductor protection usable up to 690 V <a href="#">3NE3334-0B; Type of coordination 2, Iq = 65 kA</a></li> </ul> |
| <b>General technical data</b>                           |  |
| <b>starting voltage [%]</b>                             | 30 ... 100 %   |
| <b>stopping voltage [%]</b>                             | 50 %; non-adjustable   |
| <b>start-up ramp time of soft starter</b>               | 0 ... 20 s   |
| <b>current limiting value [%] adjustable</b>            | 130 ... 700 %  |
| <b>certificate of suitability</b>                       |  |
| • CE marking  | Yes  |
| • UL approval   | Yes  |
| • CSA approval  | Yes  |
| <b>product component</b>                                |  |
| • HMI-High Feature                                      | No   |
| • is supported HMI-Standard                             | Yes  |
| • is supported HMI-High Feature                         | Yes  |
| <b>product feature integrated bypass contact system</b> | Yes  |
| <b>number of controlled phases</b>                      | 3  |
| <b>buffering time in the event of power failure</b>     |  |
| • for main current circuit                              | 100 ms   |

|  |   |
|--|---|
| • for control circuit  | 100 ms  |
| <b>insulation voltage rated value</b>                          | 600 V   |
| <b>degree of pollution</b>                                     | 3, acc. to IEC 60947-4-2  |
| <b>impulse voltage rated value</b>                             | 6 kV  |
| <b>blocking voltage of the thyristor maximum</b>               | 1 800 V   |
| <b>service factor</b>  | 1   |
| <b>surge voltage resistance rated value</b>                    | 6 kV  |
| <b>maximum permissible voltage for protective separation</b>   |   |
| • between main and auxiliary circuit                           | 600 V   |
| <b>shock resistance</b>  | 15 g / 11 ms, from 12 g / 11 ms with potential contact lifting  |
| <b>vibration resistance</b>                                    | 15 mm to 6 Hz; 2 g to 500 Hz  |
| utilization category according to IEC 60947-4-2                | AC 53a  |
| <b>reference code according to IEC 81346-2</b>                 | Q   |
| <b>Substance Prohibitance (day/month/year)</b>                 | 02/15/2018  |
| <b>SVHC substance name</b>                                     | Lead CAS-No. 7439-92-1<br>Lead monoxide (lead oxide) CAS-No. 1317-36-8<br>2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol CAS-No. 79-94-7<br>2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5<br>Melamine CAS-No. 108-78-1<br>6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol CAS-No. 119-47-1<br>Dibutylbis(pentane-2,4-dionato-O,O')tin CAS-No. 22673-19-4 |
| <b>Net Weight</b>  | 6.6 kg  |
| <b>product function</b>  |   |
| • ramp-up (soft starting)                                      | Yes   |
| • soft stopping  | Yes   |
| • Soft Torque  | Yes   |
| • adjustable current limitation                                | Yes   |
| • pump stop  | Yes   |
| • intrinsic device protection                                  | Yes   |
| • motor overload protection                                    | Yes; Electronic motor overload protection   |
| • evaluation of thermistor motor protection                    | No  |
| • inside-delta circuit   | Yes   |
| • auto-RESET   | Yes   |
| • manual RESET   | Yes   |
| • remote reset   | Yes; By turning off the control supply voltage  |
| • communication function                                       | Yes   |
| • operating measured value display                             | Yes; Only in conjunction with special accessories   |
| • error logbook  | Yes; Only in conjunction with special accessories   |
| • via software parameterizable                                 | No  |
| • via software configurable                                    | Yes   |
| • <b>PROFenergy</b>  | Yes; in connection with the PROFINET Standard communication module  |
| • <b>firmware update</b>                                       | Yes   |
| • <b>removable terminal for control circuit</b>                | Yes   |
| • torque control   | No  |
| • analog output  | Yes; 4 ... 20 mA (default) / 0 ... 10 V (parameterizable with High Feature HMI)   |
| <b>Power Electronics</b>                                       |   |
| <b>operational current</b>                                     |   |
| • at 40 °C rated value   | 143 A   |
| • at 50 °C rated value   | 128 A   |
| • at 60 °C rated value   | 118 A   |
| <b>operational current at inside-delta circuit</b>             |   |
| • at 40 °C rated value   | 248 A   |
| • at 50 °C rated value   | 222 A   |
| • at 60 °C rated value   | 204 A   |
| <b>operating voltage</b>                                       |   |
| • rated value  | 200 ... 600 V   |
| • at inside-delta circuit rated value                          | 200 ... 600 V   |
| <b>relative negative tolerance of the operating voltage</b>    | -15 %   |
| <b>relative positive tolerance of the operating voltage</b>    | 10 %  |
| <b>relative negative tolerance of the operating voltage at</b> | -15 %   |

|   |        |
|---|--------|
| <b>inside-delta circuit</b>   |        |
| <b>relative positive tolerance of the operating voltage at inside-delta circuit</b> | 10 %   |
| <b>operating power for 3-phase motors</b>   |        |
| • at 230 V at 40 °C rated value   | 37 kW  |
| • at 230 V at inside-delta circuit at 40 °C rated value                             | 75 kW  |
| • at 400 V at 40 °C rated value   | 75 kW  |
| • at 400 V at inside-delta circuit at 40 °C rated value                             | 132 kW |
| • at 500 V at 40 °C rated value   | 90 kW  |
| • at 500 V at inside-delta circuit at 40 °C rated value                             | 160 kW |
| <b>Operating frequency 1 rated value</b>  | 50 Hz  |
| <b>Operating frequency 2 rated value</b>  | 60 Hz  |
| <b>relative negative tolerance of the operating frequency</b>                       | -10 %  |
| <b>relative positive tolerance of the operating frequency</b>                       | 10 %   |
| <b>adjustable motor current</b>   |        |
| • at rotary coding switch on switch position 1                                      | 68 A   |
| • at rotary coding switch on switch position 2                                      | 73 A   |
| • at rotary coding switch on switch position 3                                      | 78 A   |
| • at rotary coding switch on switch position 4                                      | 83 A   |
| • at rotary coding switch on switch position 5                                      | 88 A   |
| • at rotary coding switch on switch position 6                                      | 93 A   |
| • at rotary coding switch on switch position 7                                      | 98 A   |
| • at rotary coding switch on switch position 8                                      | 103 A  |
| • at rotary coding switch on switch position 9                                      | 108 A  |
| • at rotary coding switch on switch position 10                                     | 113 A  |
| • at rotary coding switch on switch position 11                                     | 118 A  |
| • at rotary coding switch on switch position 12                                     | 123 A  |
| • at rotary coding switch on switch position 13                                     | 128 A  |
| • at rotary coding switch on switch position 14                                     | 133 A  |
| • at rotary coding switch on switch position 15                                     | 138 A  |
| • at rotary coding switch on switch position 16                                     | 143 A  |
| • minimum   | 68 A   |
| <b>adjustable motor current</b>   |        |
| • for inside-delta circuit at rotary coding switch on switch position 1             | 118 A  |
| • for inside-delta circuit at rotary coding switch on switch position 2             | 126 A  |
| • for inside-delta circuit at rotary coding switch on switch position 3             | 135 A  |
| • for inside-delta circuit at rotary coding switch on switch position 4             | 144 A  |
| • for inside-delta circuit at rotary coding switch on switch position 5             | 152 A  |
| • for inside-delta circuit at rotary coding switch on switch position 6             | 161 A  |
| • for inside-delta circuit at rotary coding switch on switch position 7             | 170 A  |
| • for inside-delta circuit at rotary coding switch on switch position 8             | 178 A  |
| • for inside-delta circuit at rotary coding switch on switch position 9             | 187 A  |
| • for inside-delta circuit at rotary coding switch on switch position 10            | 196 A  |
| • for inside-delta circuit at rotary coding switch on switch position 11            | 204 A  |
| • for inside-delta circuit at rotary coding switch on switch position 12            | 213 A  |
| • for inside-delta circuit at rotary coding switch on switch position 13            | 222 A  |
| • for inside-delta circuit at rotary coding switch on switch position 14            | 230 A  |
| • for inside-delta circuit at rotary coding switch on switch position 15            | 239 A  |
| • for inside-delta circuit at rotary coding switch on switch position 16            | 248 A  |

|   |  |
|---|--|
| position 16   |  |
| • at inside-delta circuit minimum   | 118 A  |
| <b>minimum load [%]</b>   | 15 %; Relative to smallest settable I <sub>e</sub>   |
| <b>power loss [W] for rated value of the current at AC</b>                      |  |
| • at 40 °C after startup  | 55 W   |
| • at 50 °C after startup  | 50 W   |
| • at 60 °C after startup  | 47 W   |
| <b>power loss [W] at AC at current limitation 350 %</b>                         |  |
| • at 40 °C during startup   | 2 127 W  |
| • at 50 °C during startup   | 1 807 W  |
| • at 60 °C during startup   | 1 605 W  |
| <b>Control circuit/ Control</b>   |  |
| <b>type of voltage of the control supply voltage</b>                            | AC/DC  |
| <b>control supply voltage at AC</b>   |  |
| • at 50 Hz rated value  | 24 V   |
| • at 60 Hz rated value  | 24 V   |
| <b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b> | -20 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b> | 20 %   |
| <b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b> | -20 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b> | 20 %   |
| <b>control supply voltage frequency</b>   | 50 ... 60 Hz   |
| <b>relative negative tolerance of the control supply voltage frequency</b>      | -10 %  |
| <b>relative positive tolerance of the control supply voltage frequency</b>      | 10 %   |
| <b>control supply voltage at DC rated value</b>                                 | 24 V   |
| <b>relative negative tolerance of the control supply voltage at DC</b>          | -20 %  |
| <b>relative positive tolerance of the control supply voltage at DC</b>          | 20 %   |
| <b>control supply current in standby mode rated value</b>                       | 160 mA   |
| <b>holding current in bypass operation rated value</b>                          | 380 mA   |
| <b>inrush current by closing the bypass contacts maximum</b>                    | 7.6 A  |
| inrush current peak at application of control supply voltage maximum            | 3.3 A  |
| duration of inrush current peak at application of control supply voltage        | 12.1 ms  |
| <b>design of the overvoltage protection</b>                                     | Varistor   |
| <b>design of short-circuit protection for control circuit</b>                   | 4 A gG fuse (I <sub>cu</sub> =1 kA), 6 A quick-acting fuse (I <sub>cu</sub> =1 kA), C1 miniature circuit breaker (I <sub>cu</sub> = 600 A), C6 miniature circuit breaker (I <sub>cu</sub> = 300 A); Is not part of scope of supply |
| <b>Inputs/ Outputs</b>  |  |
| <b>number of digital inputs</b>   | 1  |
| <b>number of digital outputs</b>  | 3  |
| • not parameterizable   | 2  |
| <b>digital output version</b>   | 2 normally-open contacts (NO) / 1 changeover contact (CO)  |
| <b>number of analog outputs</b>   | 1  |
| <b>switching capacity current of the relay outputs</b>                          |  |
| • at AC-15 at 250 V rated value   | 3 A  |
| • at DC-13 at 24 V rated value  | 1 A  |
| <b>Installation/ mounting/ dimensions</b>                                       |  |
| <b>mounting position</b>  | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back   |
| <b>fastening method</b>   | screw fixing   |
| <b>height</b>   | 306 mm   |
| <b>width</b>  | 185 mm   |
| <b>depth</b>  | 203 mm   |
| required spacing with side-by-side mounting                                     |  |
| • forwards  | 10 mm  |

|   |   |
|---|---|
| <ul style="list-style-type: none"> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul>  | <p>0 mm</p> <p>100 mm</p> <p>75 mm</p> <p>5 mm</p>  |
| <b>weight without packaging</b>   | 6.6 kg  |
| <b>Connections/ Terminals</b>   |   |
| <b>type of electrical connection</b>  |   |
| <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for control circuit</li> </ul>   | <p>busbar connection</p> <p>spring-loaded terminals</p>   |
| <b>width of connection bar maximum</b>  | 25 mm   |
| <b>type of connectable conductor cross-sections</b>   |   |
| <ul style="list-style-type: none"> <li>for DIN cable lug for main contacts stranded</li> <li>for DIN cable lug for main contacts finely stranded</li> </ul>   | <p>2x (16 ... 95 mm<sup>2</sup>)</p> <p>2x (25 ... 120 mm<sup>2</sup>)</p>  |
| <b>type of connectable conductor cross-sections</b>   |   |
| <ul style="list-style-type: none"> <li>for control circuit solid</li> <li>for control circuit finely stranded with core end processing</li> <li>for AWG cables for control circuit solid</li> <li>for AWG cables for control circuit finely stranded with core end processing</li> </ul>  | <p>2x (0.25 ... 1.5 mm<sup>2</sup>)</p> <p>2x (0.25 ... 1.5 mm<sup>2</sup>)</p> <p>2x (24 ... 16)</p> <p>2x (24 ... 16)</p>   |
| <b>wire length</b>  |   |
| <ul style="list-style-type: none"> <li>between soft starter and motor maximum</li> <li>at the digital inputs at AC maximum</li> <li>at the digital inputs at DC maximum</li> </ul>  | <p>800 m</p> <p>100 m</p> <p>1 000 m</p>  |
| <b>tightening torque</b>  |   |
| <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>   | <p>10 ... 14 N·m</p> <p>0.8 ... 1.2 N·m</p>   |
| <b>tightening torque [lbf·in]</b>   |   |
| <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>   | <p>89 ... 124 lbf·in</p> <p>7 ... 10.3 lbf·in</p>   |
| <b>Ambient conditions</b>   |   |
| installation altitude at height above sea level maximum   | 5 000 m   |
| <b>ambient temperature</b>  |   |
| <ul style="list-style-type: none"> <li>during operation</li> <li>during storage and transport</li> </ul>  | <p>-25 ... +60 °C; Please observe derating at temperatures of 40 °C or above</p> <p>-40 ... +80 °C</p>  |
| <b>environmental category</b>   |   |
| <ul style="list-style-type: none"> <li>during operation according to IEC 60721</li> <li>during storage according to IEC 60721</li> <li>during transport according to IEC 60721</li> </ul>   | <p>3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6</p> <p>1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4</p> <p>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)</p>  |
| <b>Electromagnetic compatibility</b>  |   |
| <b>EMC emitted interference</b>   | acc. to IEC 60947-4-2: Class A  |
| <b>Communication/ Protocol</b>  |   |
| <b>communication module is supported</b>  |   |
| <ul style="list-style-type: none"> <li>PROFINET standard</li> <li>EtherNet/IP</li> <li>Modbus RTU</li> <li>Modbus TCP</li> <li>PROFIBUS</li> </ul>  | <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p> <p>Yes</p>  |
| <b>UL/CSA ratings</b>   |   |
| <b>manufacturer's article number</b>  |   |
| <ul style="list-style-type: none"> <li>of circuit breaker usable for Standard Faults <ul style="list-style-type: none"> <li>at 460/480 V according to UL</li> <li>60/480 V according to UL</li> <li>at 460/480 V at inside-delta circuit according to UL</li> <li>60/480 V at inside-delta circuit according to UL</li> <li>at 575/600 V according to UL</li> <li>at 575/600 V at inside-delta circuit according to UL</li> </ul> </li> </ul> | <p>Siemens type: 3VA52, max. 250 A; I<sub>q</sub> = 10 kA</p> <p>Siemens type: 3VA52, max. 250 A; I<sub>q</sub> max = 65 kA</p> <p>Siemens type: 3VA52, max. 250 A; I<sub>q</sub> = 10 kA</p> <p>Siemens type: 3VA52, max. 250 A; I<sub>q</sub> max = 65 kA</p> <p>Siemens type: 3VA52, max. 250 A; I<sub>q</sub> = 10 kA</p> <p>Siemens type: 3VA52, max. 250 A; I<sub>q</sub> = 10 kA</p> |

• of the fuse

- usable for Standard Faults up to 575/600 V according to UL
- usable for High Faults up to 575/600 V according to UL
- usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL
- usable for High Faults at inside-delta circuit up to 575/600 V according to UL

Type: Class RK5 / K5, max. 350 A; Iq = 10 kA  
 Type: Class J / L, max. 350 A; Iq = 100 kA  
 Type: Class RK5 / K5, max. 350 A; Iq = 10 kA  
 Type: Class J / L, max. 350 A; Iq = 100 kA

**operating power [hp] for 3-phase motors**

- at 200/208 V at 50 °C rated value 40 hp
- at 220/230 V at 50 °C rated value 40 hp
- at 460/480 V at 50 °C rated value 100 hp
- at 575/600 V at 50 °C rated value 125 hp
- at 200/208 V at inside-delta circuit at 50 °C rated value 75 hp
- at 220/230 V at inside-delta circuit at 50 °C rated value 75 hp
- at 460/480 V at inside-delta circuit at 50 °C rated value 150 hp
- at 575/600 V at inside-delta circuit at 50 °C rated value 200 hp

**contact rating of auxiliary contacts according to UL** R300-B300

Electrical Safety

**protection class IP on the front according to IEC 60529** IP00; IP20 with cover

**touch protection on the front according to IEC 60529** finger-safe, for vertical contact from the front with cover

**Approvals Certificates**

Environmental Product Declaration

- global warming potential [CO2 eq] / during manufacturing 67.7 kg
- global warming potential [CO2 eq] / during sales 1.84 kg
- global warming potential [CO2 eq] / during operation 242 kg
- global warming potential [CO2 eq] / after end of life -15.7 kg
- global warming potential [CO2 eq] / total 296 kg

Environment

General Product Approval

[Environmental Confirmations](#)



General Product Approval

EMV

Test Certificates

Maritime application



[Type Test Certificates/Test Report](#)



Maritime application

other



[Confirmation](#)

[Confirmation](#)

other



**Further information**

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5235-2AC05>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5235-2AC05>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5235-2AC05&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5235-2AC05&lang=en)

Cax online generator

<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5235-2AC05>

Characteristic curves

[https://curves.simaris.siemens.com/curves/<mmp\\_prod\\_noCOMP="HAUPT"></mmp\\_prod\\_no>](https://curves.simaris.siemens.com/curves/<mmp_prod_noCOMP=)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RW5235-2AC05/char>

Characteristic: Installation altitude

[https://www.automation.siemens.com/bilddb/index.aspx?gridview=view2&objkey=G\\_NSB0\\_XX\\_01704&showdetail=true&view=Search](https://www.automation.siemens.com/bilddb/index.aspx?gridview=view2&objkey=G_NSB0_XX_01704&showdetail=true&view=Search)

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

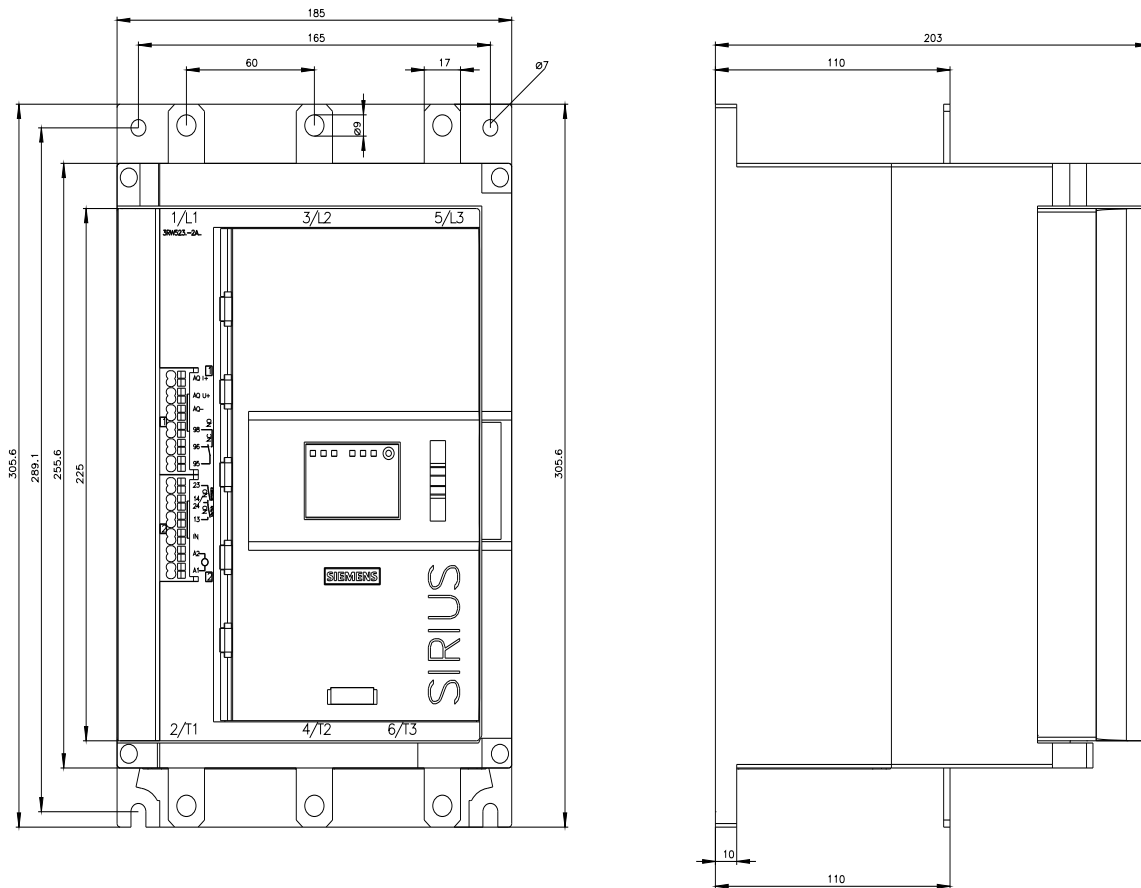



last modified:

4/4/2026 

