


Unshielded Power Inductors - Radial Leaded

multicompPRO

**RoHS
Compliant**



Configurations & Dimensions

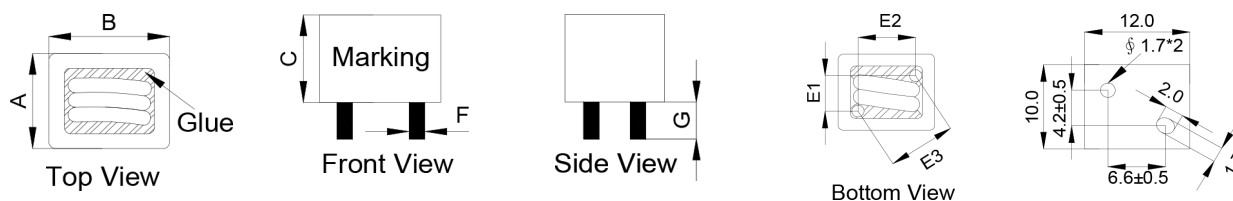

Part Number	A	B	C	E1	E2	E3	F	G
MP005775	9.7	11.7	8.7	4.2	6.6	7.8	Φ1.4	3.5
MP005776	9	11	8.3					
MP005777	9.7	11.7	8.5					
MP005778			8.7					
MP005779	9	11	8.3	4.2	6.6	7.8	Φ1.4	

Electrical Characteristics

Part Number	L (nH) ± Tol	DCR (mΩ)	Isat (A)	Irms (A)	Op. Temp
MP005775	360 ±15%	0.65 ±7%	50	43	-55°C to +130°C
MP005776	300 ±15%	0.7 ±8%		40	
MP005777		0.65 ±7%		43	
MP005778	680 ±20%	1.9 ±10%	40	40	
MP005779	360 ±15%	0.65 ±7%	50	43	

Notes:


1. L is measured at: 100KHz, 1.0V @ 25°C.
2. Isat: DC current that causes inductance to drop by approximately 20% from L
3. Irms: DC current that causes an approximate temperature rise (ΔT) of 40°C.

Unshielded Power Inductors - Radial Leaded


multicompPRO

Electrical Characteristics Curve


MP005775

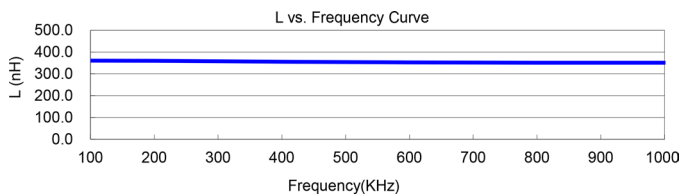


Frequency(KHz)	100	200	300	400	500	600	700	800	900	1000
L (nH)	360.48	360.25	357.8	355.62	353.65	352.56	351.85	351.35	351.02	350.83

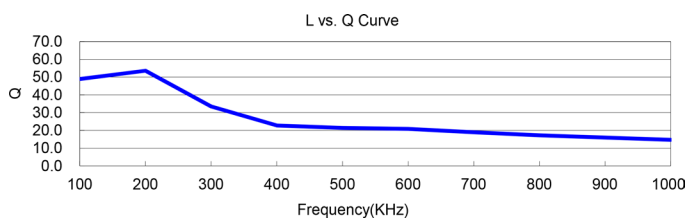

Frequency(KHz)	100	200	300	400	500	600	700	800	900	1000
Q	48.95	53.56	33.42	22.81	21.39	20.82	18.98	17.22	16	14.73

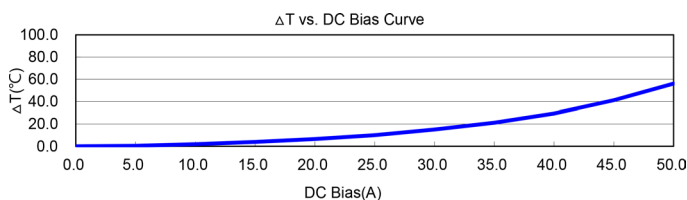

DC Bias(A)	0	5	10	15	20	25	30	35	40	45	50
$\Delta T(^{\circ}C)$	0	0.6	1.9	4	6.5	10.0	15.1	21.2	29.5	41.2	56.2

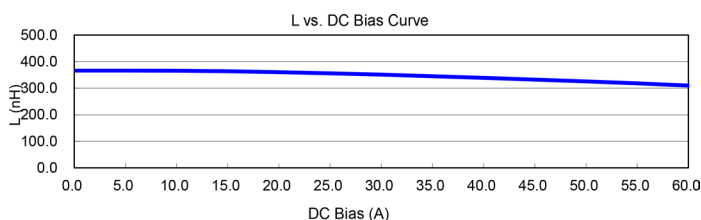

DC Bias(A)	0	5	10	15	20	25	30	35	40	45	50	55	60
L (nH)	366.25	366.05	365.6	363.95	360.2	355.85	350.9	345.2	338.55	332.2	325.5	318.15	309.8


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO


Unshielded Power Inductors - Radial Leaded

multicompPRO


MP005776

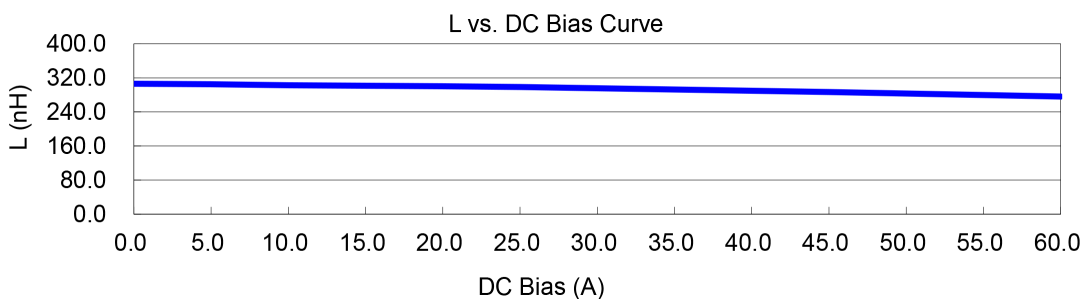

DC Bias(A)	0.0	5	10	15	20	25	30	35	40	45	50	55	60
L (nH)	306.52	305.25	303.02	301.9	300.4	298.32	295.8	292.86	290	286.78	283.42	279.88	276.16

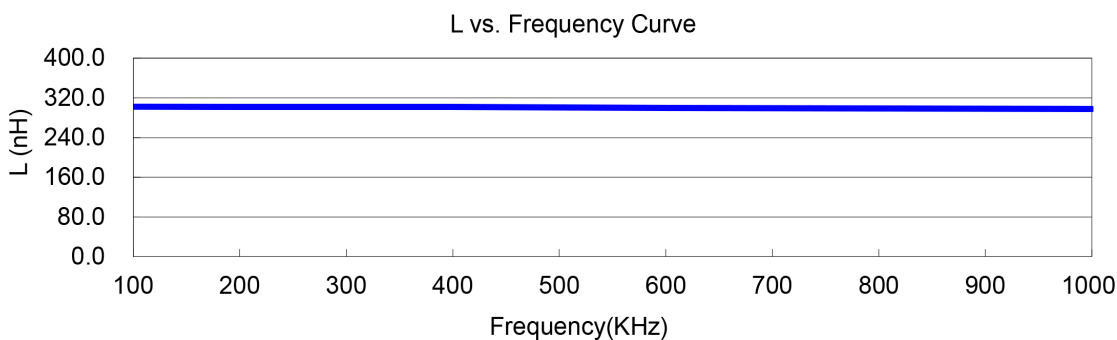

Frequency(KHz)	100	200	300	400	500	600	700	800	900	1000
L (nH)	302.04	301.88	301.56	301.25	300.26	299.56	299.01	298.55	298.01	297.7

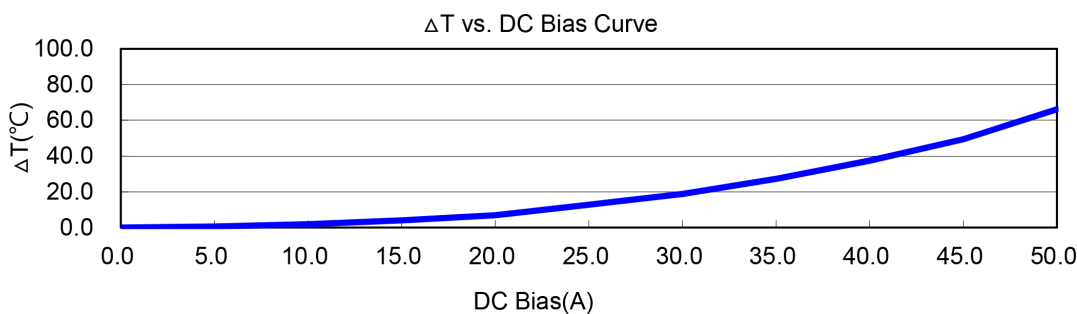

DC Bias(A)	0	5	10	15	20	25	30	35	40	45	50
$\Delta T(^{\circ}C)$	0	0.6	1.9	4.1	7	12.8	18.8	27.3	37.5	49.5	66.2


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO


Unshielded Power Inductors - Radial Leaded

multicompPRO


MP005777

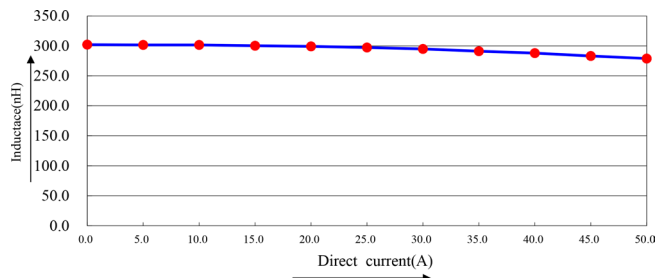


Direct current(A)	0.0	5	10	15	20	25	30	35	40	45	50
Inductance(nH)	302.05	301.7	301.6	300.4	299.25	297.45	294.85	291.1	287.85	283.25	278.95

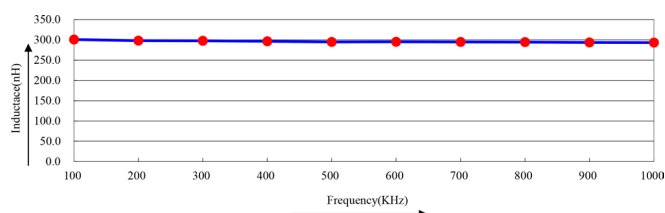

Frequency(KHz)	100	200	300	400	500	600	700	800	900	1000
Inductance(nH)	300.92	298.2	297.9	296.68	294.94	295.45	295.15	294.45	293.85	293.45

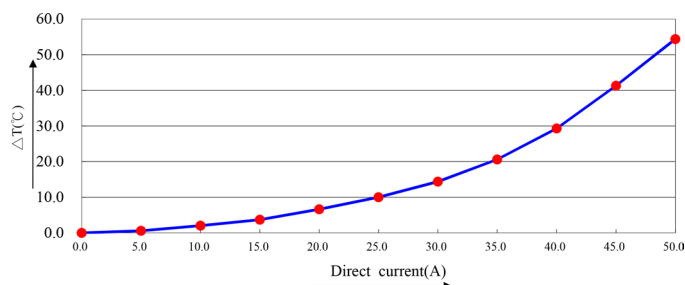

Direct current(A)	0	5	10	15	20	25	30	35	40	45	50
ΔT(°C)	0	0.6	2	3.7	6.6	10	14.4	20.6	29.3	41.3	54.4

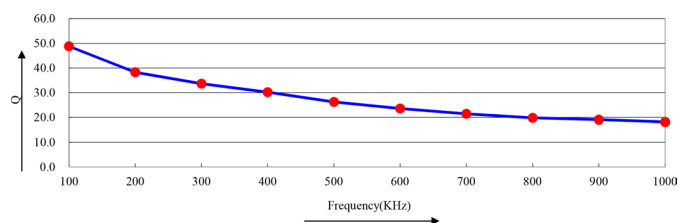

Frequency(KHz)	100	200	300	400	500	600	700	800	900	1000
Q	48.8	38.26	33.67	30.19	26.27	23.56	21.4	19.78	19.06	18.16


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO


Unshielded Power Inductors - Radial Leaded

multicompPRO


MP005778

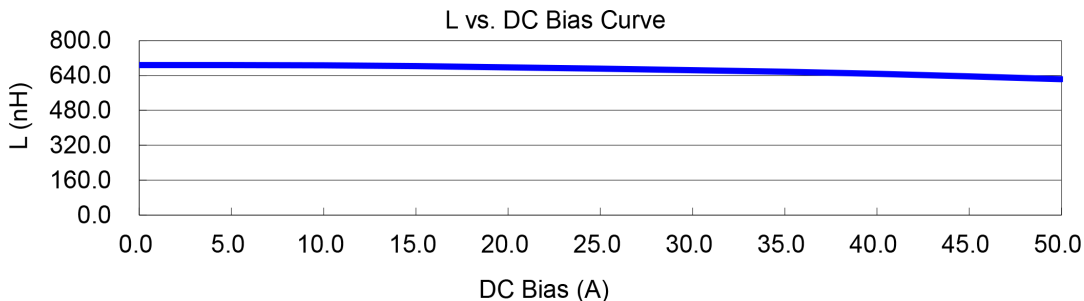

DC Bias(A)	0	5	10	15	20	25	30	35	40	45	50
L (nH)	688.3	687.35	686.6	682.45	677.6	671.9	664.9	656.85	647.3	636.15	623.4

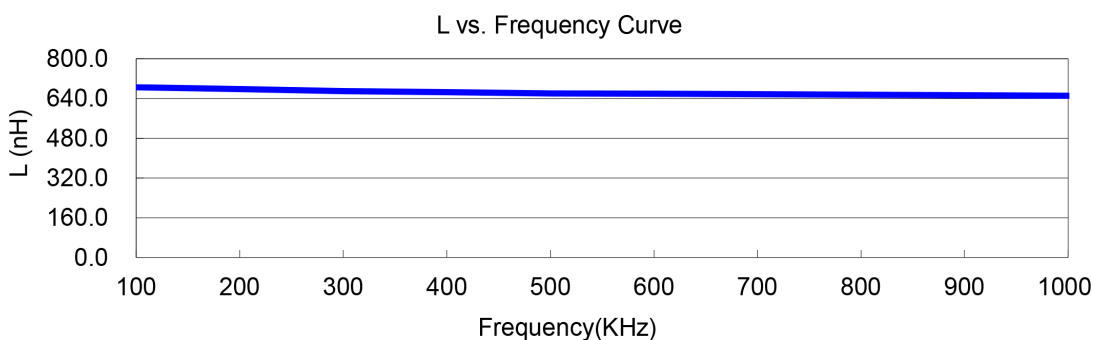

Frequency(KHz)	100	200	300	400	500	600	700	800	900	1000
L (nH)	685	677.5	669.5	665.15	660.45	659.5	657.4	655.2	653.7	650.5

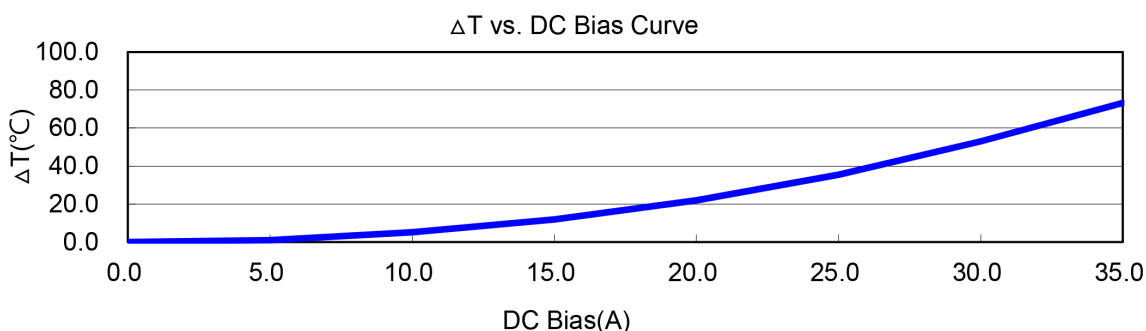


DC Bias(A)	0	5	10	15	20	25	30	35
$\Delta T(^{\circ}C)$	0	1	5.2	11.9	22	35.4	53	73.2


Unshielded Power Inductors - Radial Leaded

multicompPRO


MP005779

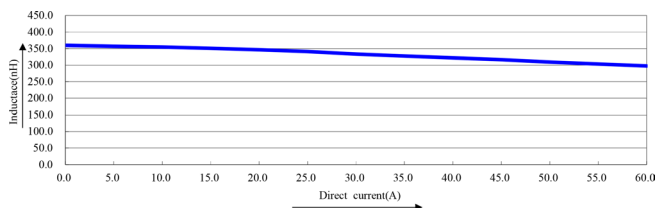


Direct current(A)	0	5	10	15	20	25	30	35	40	45	50	55	60
Inductance (nH)	359.8	356.95	354.55	350.95	346.4	341	333.15	327.55	322.05	316.25	308.85	303.4	297.36

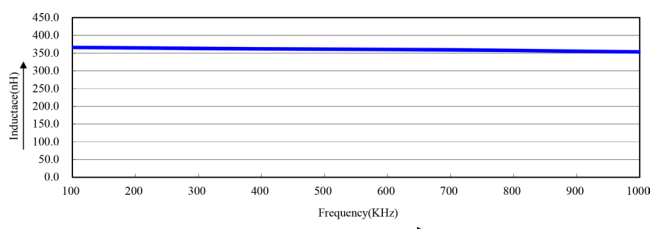

Frequency(KHz)	100	200	300	400	500	600	700	800	900	1000
Inductance(nH)	365.96	364.7	363.11	362.06	361.27	360.25	359.3	357.36	355.27	353.6

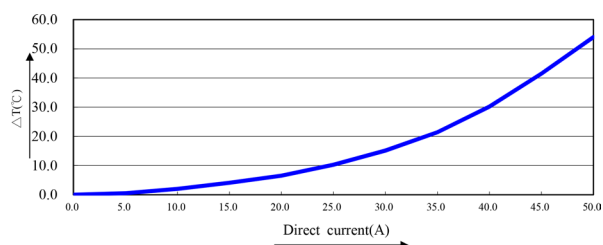

Direct current(A)	0	5	10	15	20	25	30	35	40	45	50
ΔT(°C)	0	0.5	2	4.1	6.5	10.3	15.1	21.4	30.2	41.5	54

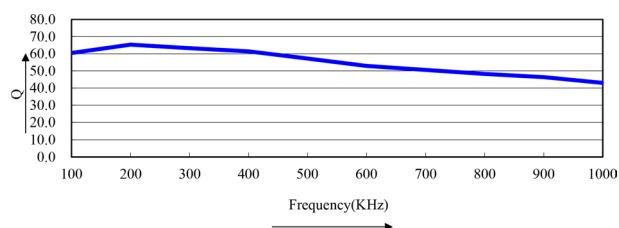

Frequency(KHz)	100	200	300	400	500	600	700	800	900	1000
Q	60.48	65.32	63.28	61.36	57.22	52.86	50.55	48.27	46.38	43

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro


multicompPRO

Unshielded Power Inductors - Radial Leaded

multicompPRO

Recommended Soldering Technologies

Wave Soldering Profile

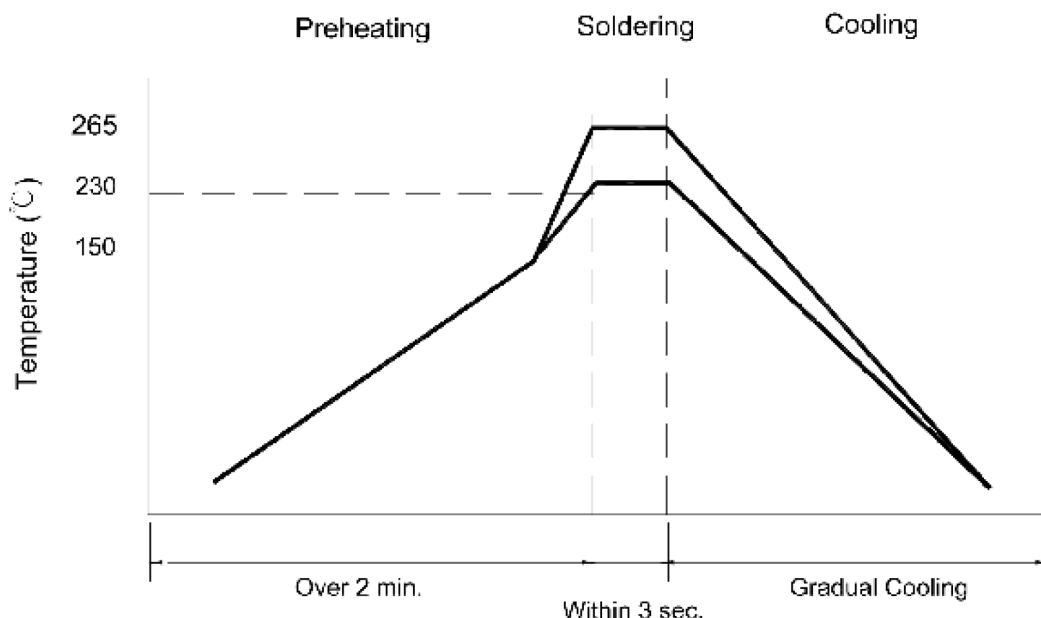

Note:

The reflow profile in the above table is only for qualification and is not meant to specify board assembly profiles. Actual board assembly profiles must be based on the customer's specific board design, solder paste and process, and should not exceed the parameters as the Reflow profile shows.

Part Number Table

Description	Part Number
Power Inductor, Unshielded, 360nH, 15%, Radial Leaded	MP005775
Power Inductor, Unshielded, 300nH, 15%, Radial Leaded	MP005776
Power Inductor, Unshielded, 300nH, 15%, Radial Leaded	MP005777
Power Inductor, Unshielded, 680nH, 20%, Radial Leaded	MP005778
Power Inductor, Unshielded, 360nH, 15%, Radial Leaded	MP005779

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO