




#### PRIMARY VOLTAGE

| Protection | Reference | Secondary voltage<br>V | Secondary Current<br>mA | No-load voltage<br>V | Ambient Temperature<br>°C | Rating<br>VA |
|------------|-----------|------------------------|-------------------------|----------------------|---------------------------|--------------|
|            | 44085     | 6                      | 250                     | 9,7                  | T 70 B                    | 1,5          |
|            | 44086     | 9                      | 167                     | 14,5                 | T 70 B                    | 1,5          |
|            | 44087     | 12                     | 125                     | 19,3                 | T 70 B                    | 1,5          |
|            | 44088     | 15                     | 100                     | 24,2                 | T 70 B                    | 1,5          |
|            | 44089     | 18                     | 83                      | 29,8                 | T 70 B                    | 1,5          |
|            | 44090     | 24                     | 63                      | 38,6                 | T 70 B                    | 1,5          |
|            | 44091     | 2 x 6                  | 2 x 125                 | 2 x 9,7              | T 70 B                    | 1,5          |
|            | 44092     | 2 x 9                  | 2 x 83                  | 2 x 15               | T 70 B                    | 1,5          |
|            | 44093     | 2 x 12                 | 2 x 63                  | 2 x 19,3             | T 70 B                    | 1,5          |
|            | 44094     | 2 x 15                 | 2 x 50                  | 2 x 24,2             | T 70 B                    | 1,5          |
|            | 44095*    | 2 x 18                 | 2 x 42                  | 2 x 29               | T 70 B                    | 1,5          |
|            | 44096*    | 2 x 24                 | 2 x 31                  | 2 x 38,6             | T 70 B                    | 1,5          |



\* **to be noted** : 2 x 18 V and 2 x 24 non safety transformer approved, conform to EN 61558-2-6 (Isolating transformer).

- Vacuum filling
- Two compartments bobbins
- Self-extinguishing plastics UL 94 VO
- Degree of protection IP 00
- 80 grams weight
- Resin class B CEI 85 (20 000 h testing to CEI 126)
- Inherently short-circuits proof transformer
- 30 V model is VDE EN 61558-2-6 certified (production on request)
- Insulation voltage 4 KV (6 KV MYRRA test)
- 100% tested production
- Certification : CCA procedure on request



1 Secondary winding



2 Secondary windings



Recommended layout for transformers with 1 secondary winding (Allows the use of a transformer with 2 secondary winding)

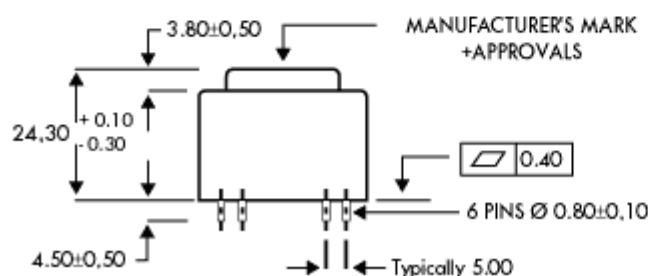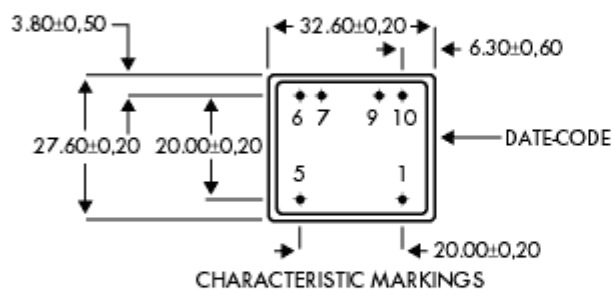

\*\* RECOMMENDED DRILL-HOLE DIAMETER FOR 1,3 mm PINS