

Permanent light element 641

(provisional technical data sheet)

WERMA Signaltechnik
 GmbH + Co.
 Dürbheimer Straße 15
 D-78604 Rietheim-Weilheim
 Phone 0049/7424/9557-0
 Fax 0049/7424/9557-44

Electrical specifications:

Operating voltage: $U_{enn} = \text{max. } 250\text{V}$

Bulb: max. 7W

Working life: depending on the
bulb used

Order-No.:

641 X00 00 Permanent light element

X 1=red 2=green 3=yellow 4=clear 5=blue

Mechanical specifications:

Material: Polycarbonate

Socket: B15d (Bayonet)

Seal: premounted with each
element

Further specifications:


Mass: ca. 55g

Temperature: $t_a -20^\circ\text{C}$ bis $+60^\circ\text{C}$

Protection rating: IP 65 when mounted or
with cap

Regulations: Conform to current EC- regu-
lations.
UL-listed.

All specifications refer to U_{enn} and room temperature!

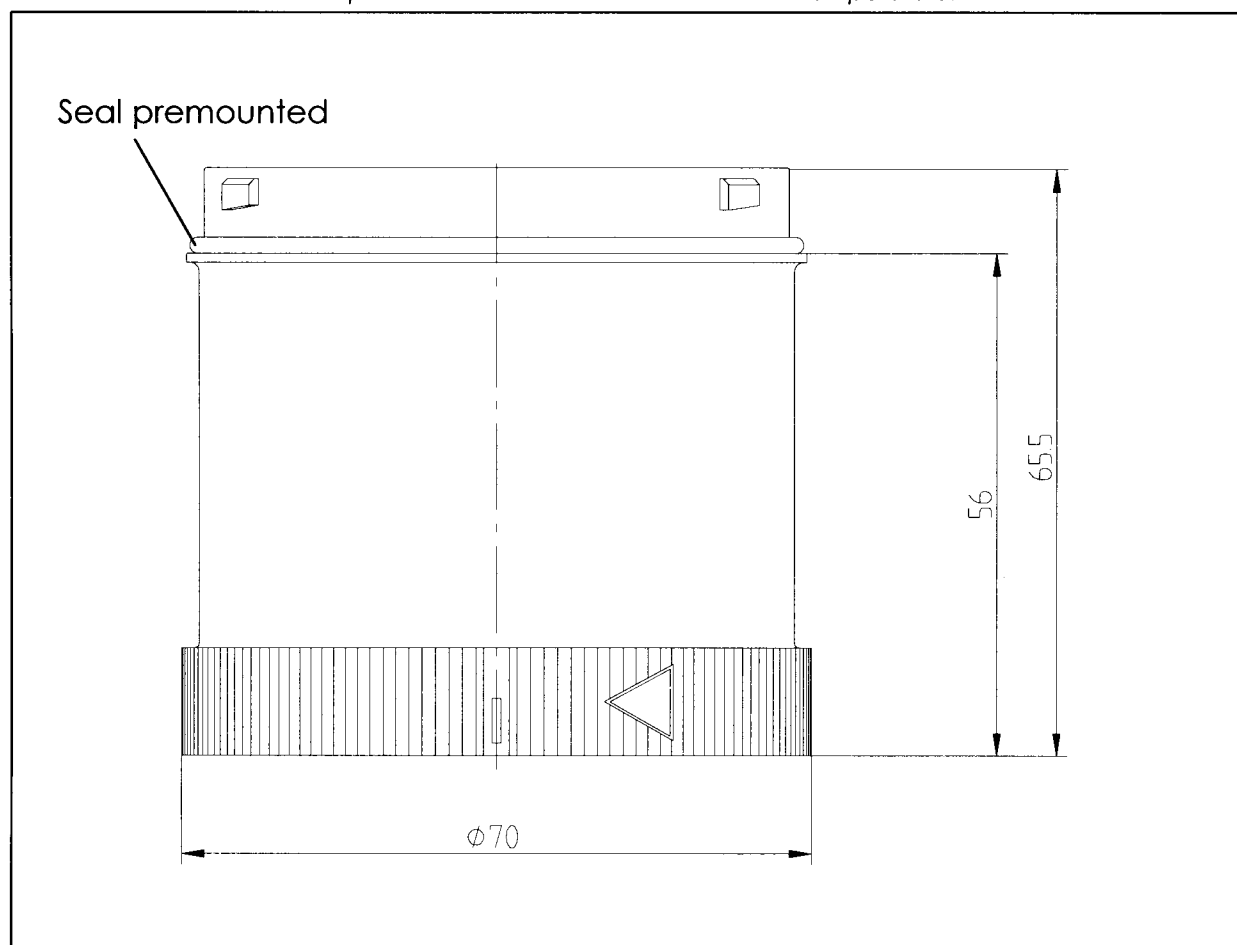

	Drawn up	proved	released	Data-sheet-No.
Name	E. Rudischhauser	<i>ru</i>	<i>RC</i>	000 641 501
Date	2001-11-06	2001-11-06	2001-11-09	Page 1 of 1