

Schottky Barrier Rectifier **multicomp**PRO

General Discription

This Device optimized for ultra-low forward voltage drop to maximize efficiency in Power Supply applications

**RoHS
Compliant**



Feature

- Multi layer Metal -Silicon Potential Structure.
- Low Leakage Current.
- High Current Capability, High Efficiency.
- High Junction Temperature Capability.

Application

- Low Voltage High Frequency Switching Power Supply.
- Low Voltage High Frequency Inverse Circuit.
- Low Voltage Continued Circuit and Protection Circuit.

Absolute Maximum Ratings (Ta = 25°C Unless otherwise specified)

Parameter	Symbol	Value	Unit
Maximal Inverted Repetitive Peak Voltage	V _{RRM}	150	V
Average Rectified Forward Current (Rated VR-20Khz Square Wave) - 50% duty cycle	I _{FAV}	10	A
Forward Peak Surge Current(Rated Load 8.3 Half Sine Wave According to JEDEC Method	I _{FSM}	290 × 1	
Operating Junction Temperature	T _J	150	°C
Storage Temperature	T _{STG}	-40 to +150	
Typical Thermal Resistance(per leg)	R _{θJC}	2	°C/W

Electrical Characteristics at (Ta = 25°C Unless otherwise specified)

Parameter	Symbol	Test Condition		Value			Unit
				MIN	TYP	MAX	
BreakdownVoltage	V _B	I _R =1mA	T _J =25°C	150	-	-	V
Maximum instantaneous reverse current at rated blocking voltage	I _R	V _R =150V	T _J =25°C	-	0.01	10	mA
			T _J =125°C				
Maximum instantaneous forward voltage	V _F	I _F =10A (I _{FAV} =10A × 1)	T _J =25°C	-	0.82	0.9	V
			T _J =125°C		-	0.78	

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

Schottky Barrier Rectifier **multicomp**PRO

Typical Characteristic Curves

Fig 1: The forward voltage and forward current curve

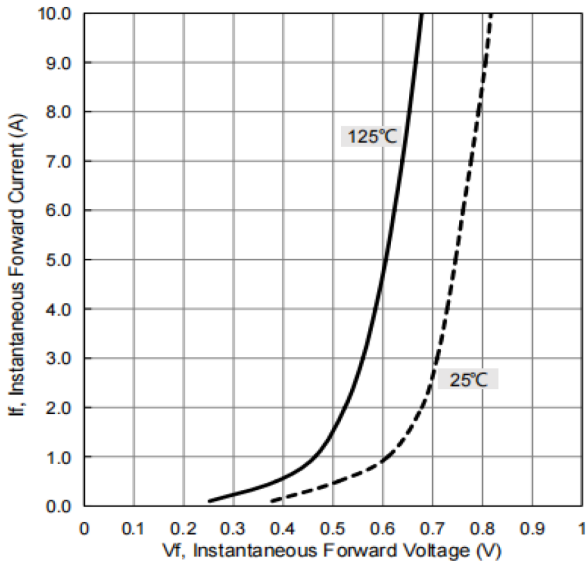


Fig 2: Current derating curve, per element


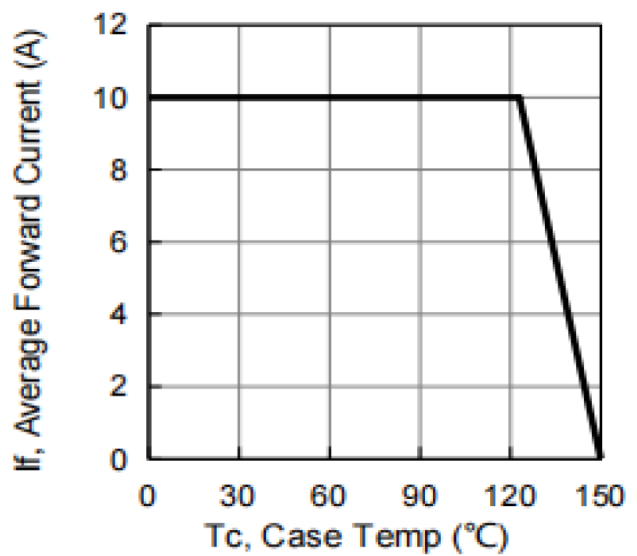



Fig 3: The reverse leak current and the reverse voltage (single-device) curve.

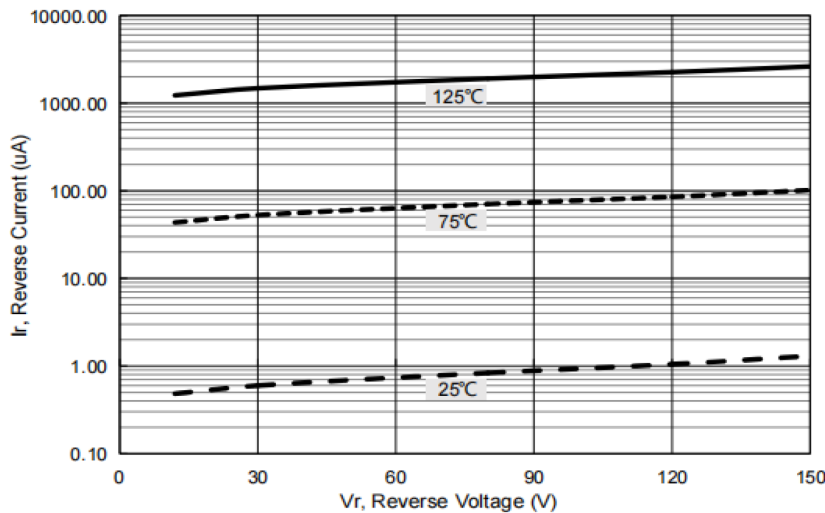

CHANGZHOU GUANGDA ELECTRONICS CO.,LTD

Schottky Barrier Rectifier **multicomp**PRO

Product Dimensions

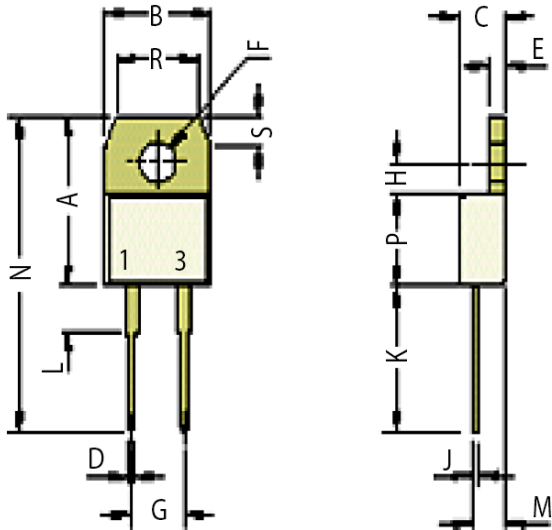

DIM	Min	Max
A	13.4	14.2
B	9.91	10.41
C	4.4	4.7
D	0.68	0.94
E	1.14	1.39
F	3.74	3.91
G	4.95	5.2
H	3.43	3.68
J	0.35	0.58
K	13.48	14.22
L	3.55	4.05
M	2.54	2.79
N	28.4	29.16
P	8.38	8.89
R	-	10.54
S	2.82	2.87

Dimensions : Millimetres

Part Number Table

Description	Part Number
Schottky Rectifier, 150V, 10A, Single, TO-220AC	MP008483

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicompPRO