

## Fuse disconnect terminal block with pivoting fuse holder; for miniature fuses 5 x 20 mm; without blown fuse indication

Item No.: 281-611



Fuse disconnect terminal block with pivoting fuse holder; for miniature fuses 5 x 20 mm; without blown fuse indication

### Marking

RoHS ✓  
Compliant

### Business data

|                      |               |
|----------------------|---------------|
| Supplier             | WAGO          |
| Item no.             | 281-611       |
| GTIN / EAN           | 4045454614591 |
| Content              | 1             |
| Order amount         | 50            |
| Customer item number |               |

### Notes


### Technical data



#### Miscellaneous


|                                   |                                |
|-----------------------------------|--------------------------------|
| Total number of connection points | 2                              |
| Total number of potentials        | 2                              |
| Color                             | gray                           |
| Pollution degree (1)              | 3                              |
| Rated voltage EN (1) [V]          | 800 [V]                        |
| Rated surge voltage (1) [kV]      | 8 [kV]                         |
| Nominal current [A]               | 10 [A]                         |
| Connection technology (1)         | CAGE CLAMP®                    |
| Solid sizes 1                     | 0.08 ... 4 mm² / 28 ... 12 AWG |

| Technical data                                 |                                                  |
|------------------------------------------------|--------------------------------------------------|
| <i>Fine-stranded wires 1</i>                   | <i>0.08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG</i> |
| <i>Strip length 1</i>                          | <i>9 ... 10 mm / 0.35 ... 0.39 in</i>            |
| <i>Type of wiring</i>                          | <i>Front-entry wiring</i>                        |
| <i>Design</i>                                  | <i>angled</i>                                    |
| <i>Marking level</i>                           | <i>Center marking</i>                            |
| <i>Insulating material</i>                     | <i>Polyamide 66 (PA 66)</i>                      |
| <i>Fire load [MJ]</i>                          | <i>0.327 [MJ]</i>                                |
| <i>Weight [g]</i>                              | <i>17.32 [g]</i>                                 |
| <i>Width</i>                                   | <i>8 mm / 0.315 in</i>                           |
| <i>Height from upper-edge of DIN-rail [mm]</i> | <i>60 [mm]</i>                                   |
| <i>Height from upper-edge of DIN-rail</i>      | <i>60 mm / 2.362 in</i>                          |
| <i>Length</i>                                  | <i>60 mm / 2.362 in</i>                          |
| <i>Type of mounting</i>                        | <i>DIN 35 rail</i>                               |
| <i>Safety information 1</i>                    | <i>Electrical ratings are given by the fuse.</i> |

#### Images & drawings

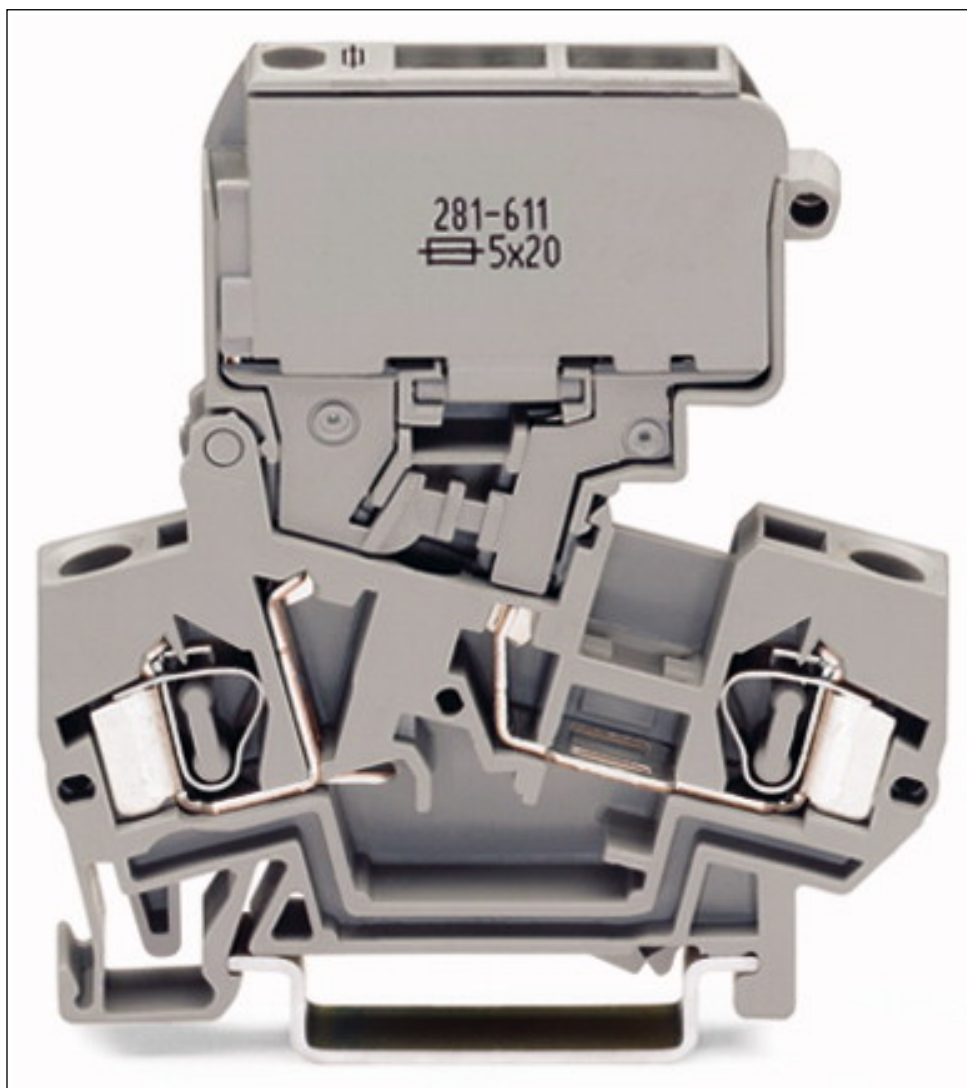

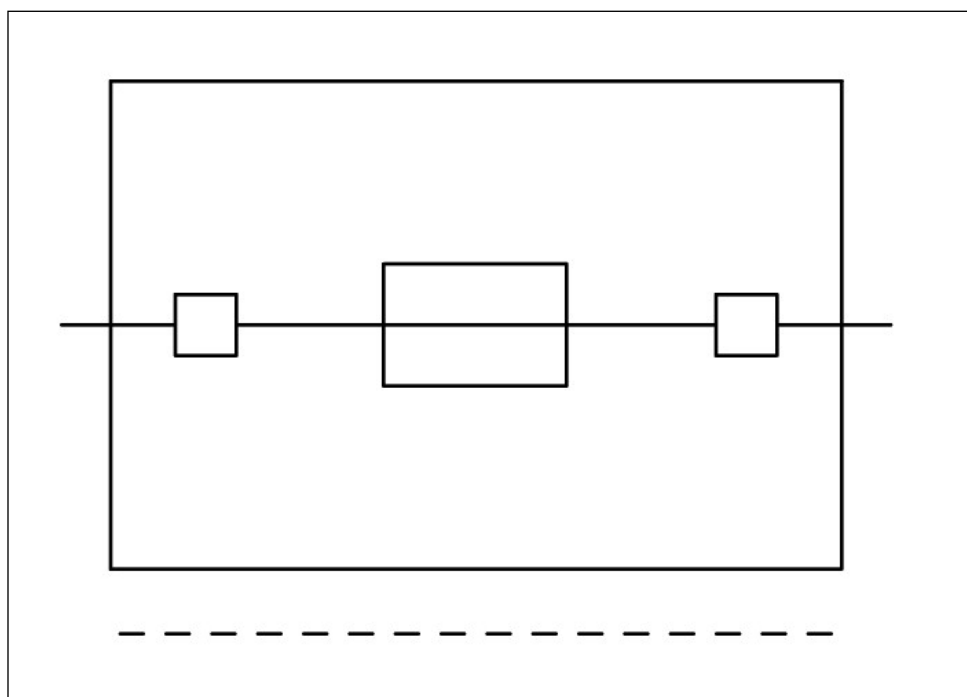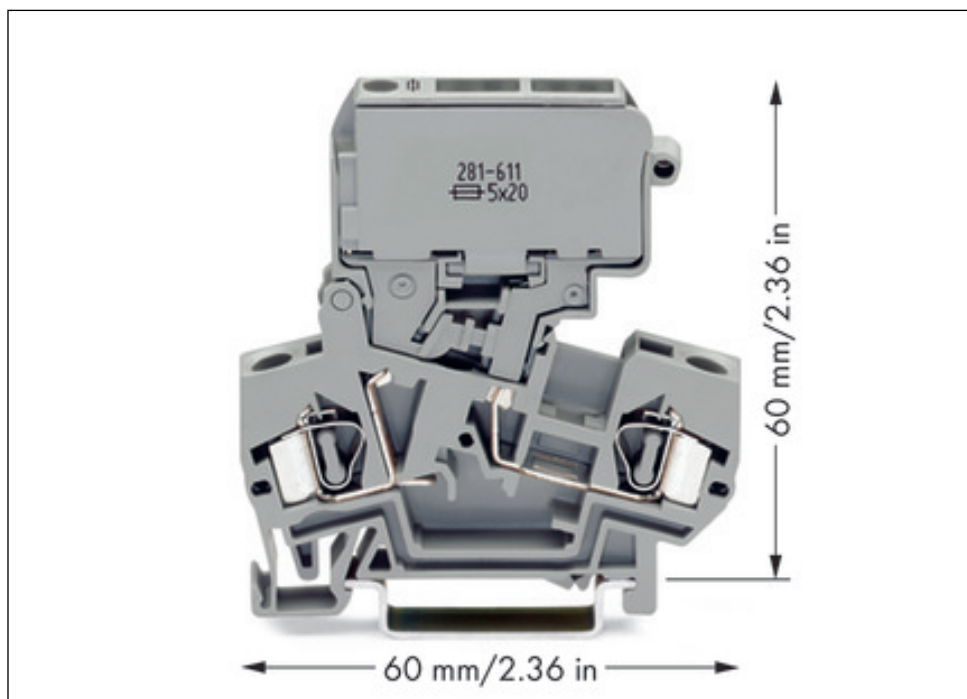

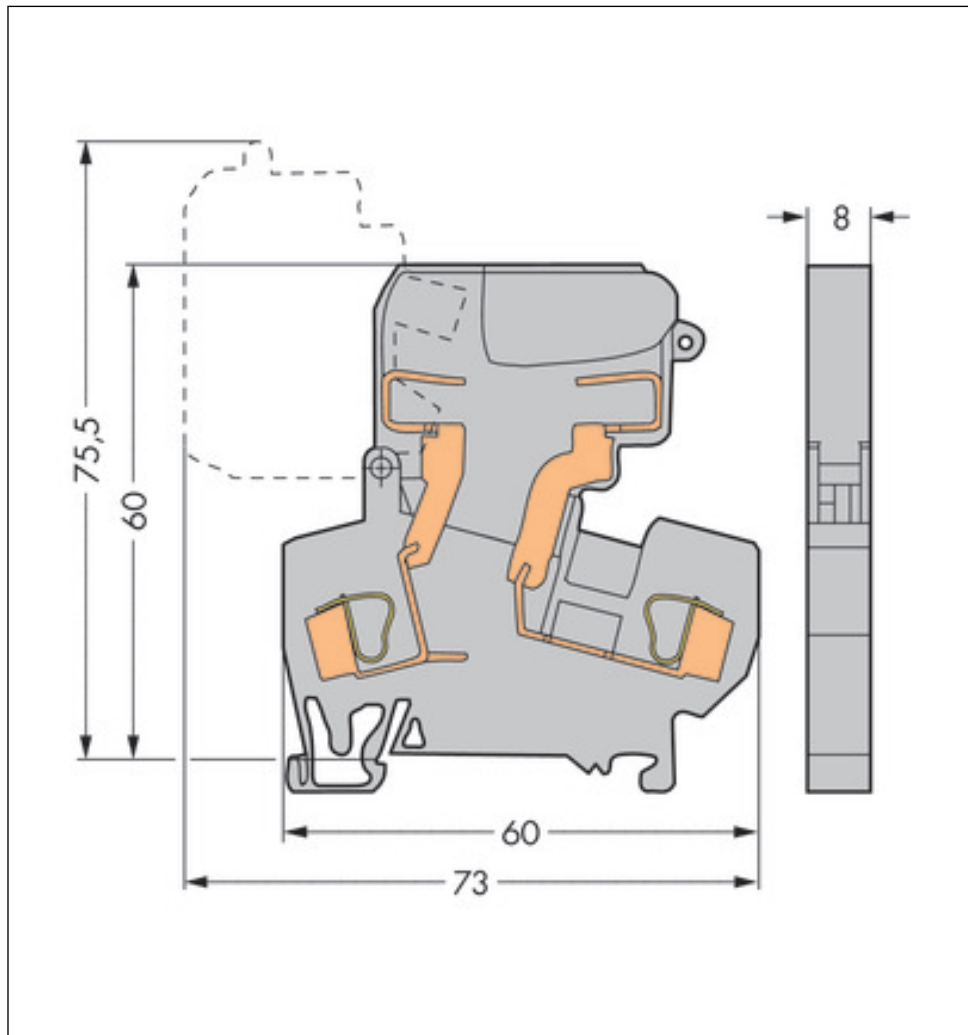

#### Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.