



# Current-compensated Chokes

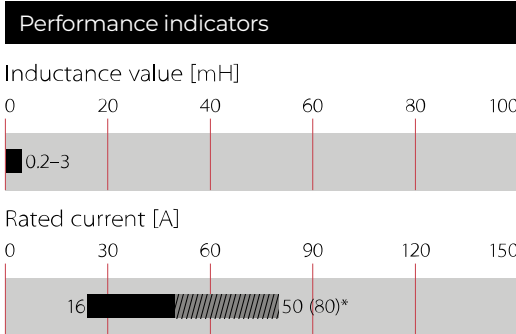

- Rated currents from 16 to 50 A
- Up to 600 VAC or 1000 VDC
- 2- and 3-wire configurations
- Horizontal and vertical PCB mounting types
- Ruggedized saturation and thermal behavior
- Open construction for forced and convection cooling
- Straightforward pin-out for easy PCB design



## Technical Specifications

|                                           |                                              |
|-------------------------------------------|----------------------------------------------|
| Maximum continuous operating voltage      | 600 VAC/1000 VDC                             |
| Operating frequency                       | DC to 400 Hz                                 |
| High potential test voltage               |                                              |
| Temperature range (operation and storage) | -40°C to +125°C (40/125/21) acc. IEC 60068-1 |
| Flammability corresponding to             | UL 94 V-0                                    |
| Cooling                                   | convection/forced cooling                    |
| MTBF @ 40°C/230 V (Mil-HB-217F)           | >5,000,000 hours                             |
| Rated currents                            | 16 to 50 A @ 60°C max. convection cooling    |
| Rated inductance                          | 0.2 to 3 MILLIHENRY                          |

## Approvals & Compliances

### RoHS

RB common-mode chokes are mainly used to filter EMI noise on AC power lines up to 600 VAC but they are as well applicable in DC power lines of photovoltaic installations or similar applications up to 1000 VDC. EMI noise of electronic equipment can go to the power lines and disturb the proper function of other devices like TV sets or radios. Thus noise generated by the equipment from switched power electronics or by high slew rates of controllers needs to be filtered. RB common-mode chokes are used to suppress EMI noise in PCB integrated filter designs with line bypass capacitors or in combination with single phase filters for extra low leakage filter designs.


### Features and Benefits

- Cost-effective PCB designs for up to 80 A with forced cooling \*
- Compact size and light weight
- Low magnetic leakage flux
- Excellent winding insulation
- Standardized foot print
- Broad range of inductance ratings
- Custom-specific versions on request
- Evaluation Board and PCB footprints available

## Typical Applications

- AC and DC filtering for midsize power range drives, photovoltaic inverters, fast chargers, charging stations, UPS and switch mode power supplies
- Filter with low leakage current noise or improved immunity against grid disturbances
- Electronic devices, automation
- Converters

## Typical electrical schematic

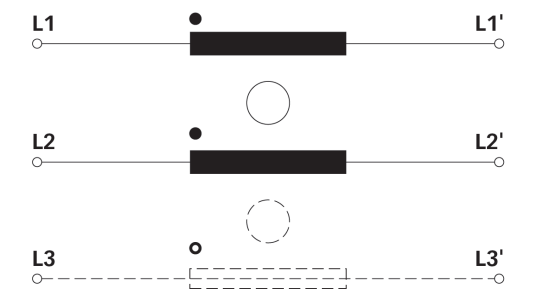

RB Series

| Selection table | Buy                                                                                 | convection<br>cooling nominal<br>current @ 60°C | *forced cooling<br>3 m/s nominal<br>current @ 60°C | Inductance<br>Ln @ 25°C | Inductance<br>Ls @ 25°C | Resistance<br>R @ 25°C | **Choke | Ø Pin     | Length<br>Pin | Weight | Eval.<br>Board |
|-----------------|-------------------------------------------------------------------------------------|-------------------------------------------------|----------------------------------------------------|-------------------------|-------------------------|------------------------|---------|-----------|---------------|--------|----------------|
|                 |                                                                                     | [A]                                             | [A]                                                | [mH/path]               | [µH/path]               | [mΩ/path]              | [size]  | D [mm]    | L [mm]        | [g]    | No.            |
| RB6122-16-1M0   |    | 16                                              | 25                                                 | 1.00                    | 6.3                     | 4.8                    | 1       | 2.0 ±0.1  | 4.5 +0.5/-0   | 130    | 1              |
| RB6122-25-0M6   |    | 25                                              | 39                                                 | 0.64                    | 4.0                     | 2.7                    | 1       | 2.4 ±0.1  | 4.5 +0.5/-0   | 135    | 1              |
| RB6122-36-0M5   |    | 36                                              | 53                                                 | 0.45                    | 3.6                     | 1.5                    | 2       | 2.2 ±0.1  | 4.5 +0.5/-0   | 180    | 1              |
| RB6122-50-0M3   |    | 50                                              | 80                                                 | 0.25                    | 1.8                     | 0.9                    | 2       | 2.5 ±0.1  | 5.0 +0.5/-0   | 172    | 1              |
| RB6522-16-1M0   |    | 16                                              | 25                                                 | 1.00                    | 6.2                     | 4.6                    | 3       | 2.0 ±0.1  | 4.5 +0.5/-0   | 132    | 2              |
| RB6522-25-0M6   |    | 25                                              | 39                                                 | 0.64                    | 3.9                     | 2.6                    | 3       | 2.4 ±0.1  | 4.5 +0.5/-0   | 126    | 2              |
| RB6522-36-0M5   |    | 36                                              | 53                                                 | 0.45                    | 3.6                     | 1.5                    | 4       | 2.2 ±0.1  | 4.5 +0.5/-0   | 180    | 2              |
| RB6522-50-0M3   |    | 50                                              | 80                                                 | 0.25                    | 2.0                     | 0.9                    | 4       | 2.5 ±0.1  | 5.0 +0.5/-0   | 175    | 2              |
| RB8522-16-3M0   |    | 16                                              | 25                                                 | 3.00                    | 22.2                    | 8.4                    | 4       | 2.0 ±0.1  | 4.5 +0.5/-0   | 172    | 3              |
| RB8522-25-2M0   |    | 25                                              | 39                                                 | 2.00                    | 13.6                    | 4.2                    | 5       | 2.65 ±0.1 | 5.0 +0.5/-0   | 268    | 3              |
| RB8522-36-1M5   |    | 36                                              | 53                                                 | 1.50                    | 12.8                    | 3.0                    | 6       | 2.2 ±0.1  | 4.5 +0.5/-0   | 440    | 3              |
| RB8522-50-0M8   |    | 50                                              | 83                                                 | 0.75                    | 6.5                     | 1.7                    | 6       | 2.5 ±0.1  | 5.0 +0.5/-0   | 430    | 3              |
| RB6132-16-0M8   |    | 16                                              | 26.5                                               | 0.80                    | 5.8                     | 4.6                    | 7       | 2.0 ±0.1  | 4.5 +0.5/-0   | 162    | 4              |
| RB6132-25-0M5   |    | 25                                              | 41                                                 | 0.47                    | 3.3                     | 2.4                    | 7       | 2.5 ±0.1  | 5.0 +0.5/-0   | 175    | 4              |
| RB6132-36-0M4   |  | 36                                              | 60                                                 | 0.42                    | 2.9                     | 1.4                    | 8       | 2.2 ±0.1  | 4.5 +0.5/-0   | 278    | 5              |
| RB6132-50-0M2   |  | 50                                              | 80                                                 | 0.18                    | 1.9                     | 0.9                    | 8       | 2.5 ±0.1  | 5.0 +0.5/-0   | 765    | 5              |
| RB6532-16-0M8   |  | 16                                              | 26.5                                               | 0.80                    | 6.9                     | 4.7                    | 9       | 2.0 ±0.1  | 4.5 +0.5/-0   | 165    | 6              |
| RB6532-25-0M5   |  | 25                                              | 41                                                 | 0.47                    | 3.6                     | 2.4                    | 9       | 2.5 ±0.1  | 5.0 +0.5/-0   | 180    | 6              |
| RB6532-36-0M4   |  | 36                                              | 60                                                 | 0.42                    | 4.2                     | 1.5                    | 10      | 2.2 ±0.1  | 4.5 +0.5/-0   | 280    | 6              |
| RB6532-50-0M2   |  | 50                                              | 81                                                 | 0.18                    | 1.5                     | 0.8                    | 10      | 2.5 ±0.1  | 5.0 +0.5/-0   | 168    | 6              |
| RB8532-16-1M3   |  | 16                                              | 27                                                 | 1.30                    | 9.1                     | 5.7                    | 9       | 2.0 ±0.1  | 4.5 +0.5/-0   | 167    | 7              |
| RB8532-25-0M9   |  | 25                                              | 41                                                 | 0.94                    | 6.7                     | 3.0                    | 11      | 2.65 ±0.1 | 5.0 +0.5/-0   | 282    | 7              |
| RB8532-36-0M8   |  | 36                                              | 58                                                 | 0.83                    | 7.3                     | 2.3                    | 12      | 2.2 ±0.1  | 4.5 +0.5/-0   | 478    | 7              |
| RB8532-50-0M3   |  | 50                                              | 82                                                 | 0.33                    | 3.1                     | 1.2                    | 12      | 2.5 ±0.1  | 5.0 +0.5/-0   | 442    | 7              |

Test conditions:  
Measuring frequency: 1 kHz; 500 µA >0.16 mH <1.6 mH; 50 µA >1.6 mH <160 mH  
Inductance tolerance: +50%, -30%  
Resistance tolerance: ±15% @ 25°C  
Electrical characteristics @ 25°C: ±2°C


\* typical current for forced cooling with 3 m/s. Due to the possible turbulences and degradation of the air stream within an equipment please consider thermal validation.

\*\* Due to manufacturing processes and to cover current ampacity of chokes with high current rating, the number of parallel wires does vary between different sizes.


Typical Choke Attenuation/Resonance Frequency Characteristics

Per CISPR 17; 50 Ω/50 Ω asym


RB 6122, RB 6522

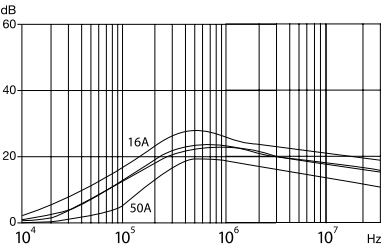


RB 6132, RB 6532

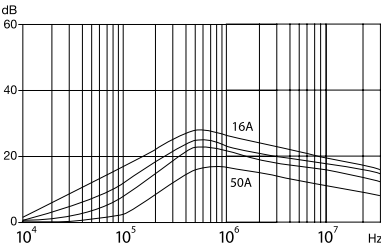

RB 8522

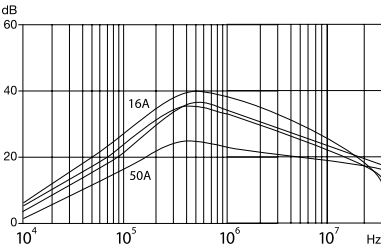


RB 8532

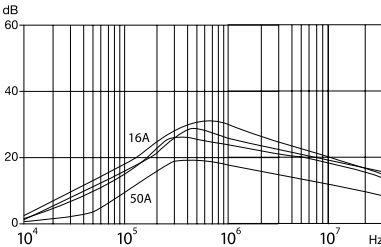

Product selector


Thermal Derating

RB xxxx-xx-xmx

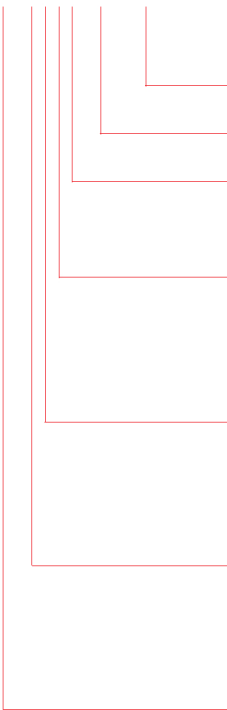

- Inductance value (e.g. 9M6 = 9.6 mH)
- Nominal input current [A] (convection cooling)
- Terminal type ( 2 for PCB pin)
- 2 = 2-wire choke
- 3 = 3-wire choke
- 1 = Horizontal
- 5 = Vertical
- 8 = high inductance series
- 6 = low inductance series
- Schaffner standard ring-core choke series RB

If higher ambient temperatures than the specified apply, the nominal current needs to be reduced according to the graph below.


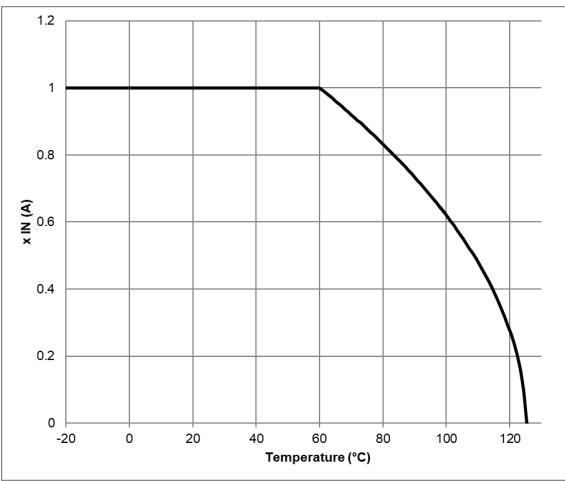


Examples:


- RB 8532-16-1M3: Vertical 3-wire high inductance choke with PCB pins, for 16 A, with 1.3 mH
- RB 6122-50-0M3: Horizontal 2-wire low inductance choke with PCB pins, for 50 A, with 0.3 mH

Mechanical Data: 1-phase / DC Chokes


All dimensions in mm; 1 inch = 25.4 mm  
Tolerances according: ISO 2768-m/EN 22768-m  
Windings of chokes are within max. component dimensions. Windings are illustrated simplified.

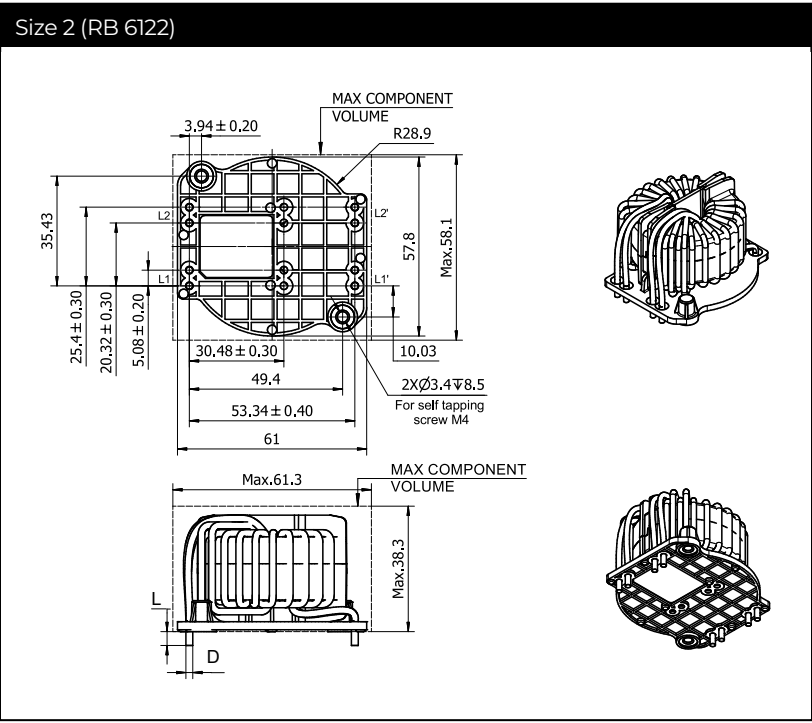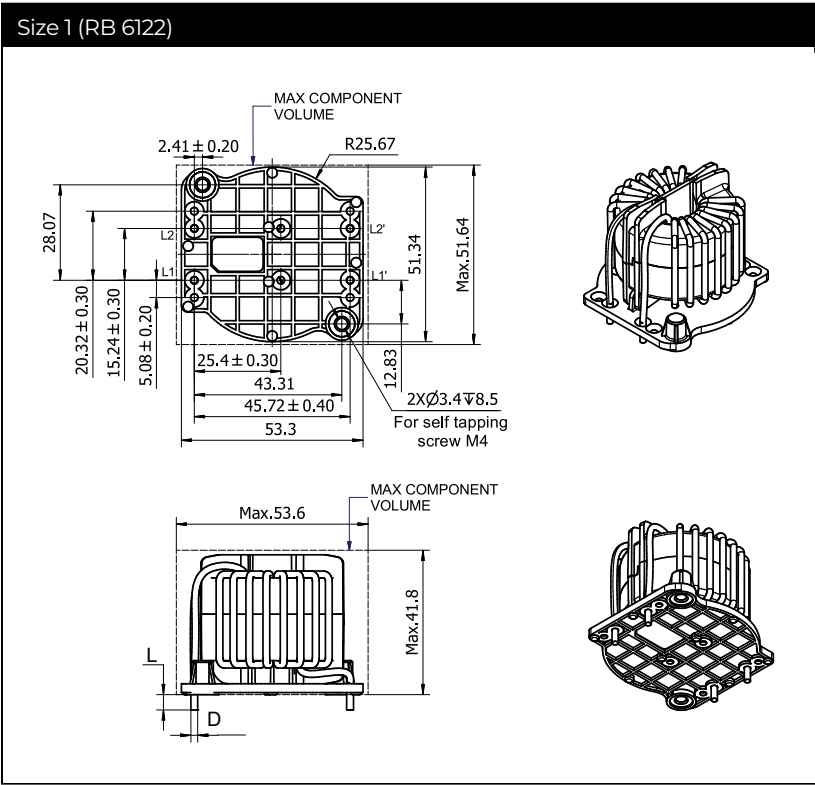


## Size 3 (RB 6522)

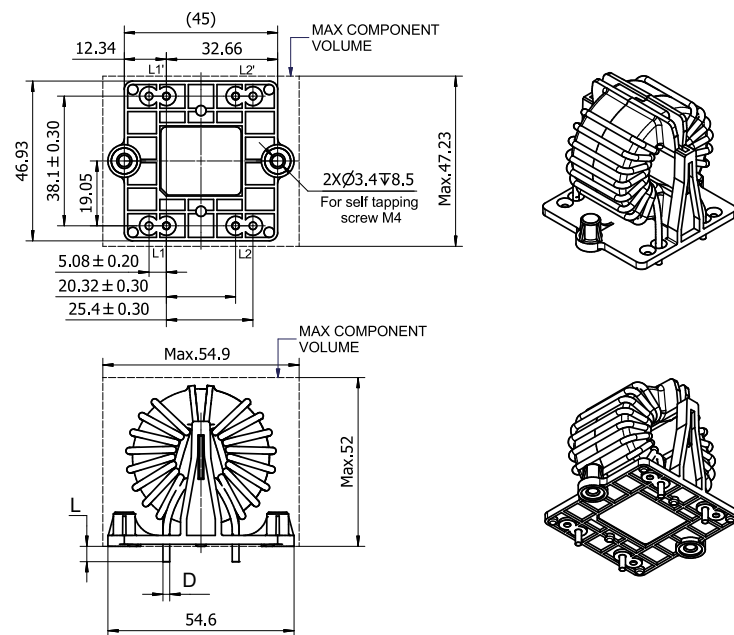


## Size 4 (RB 6522/RB 8522)\*

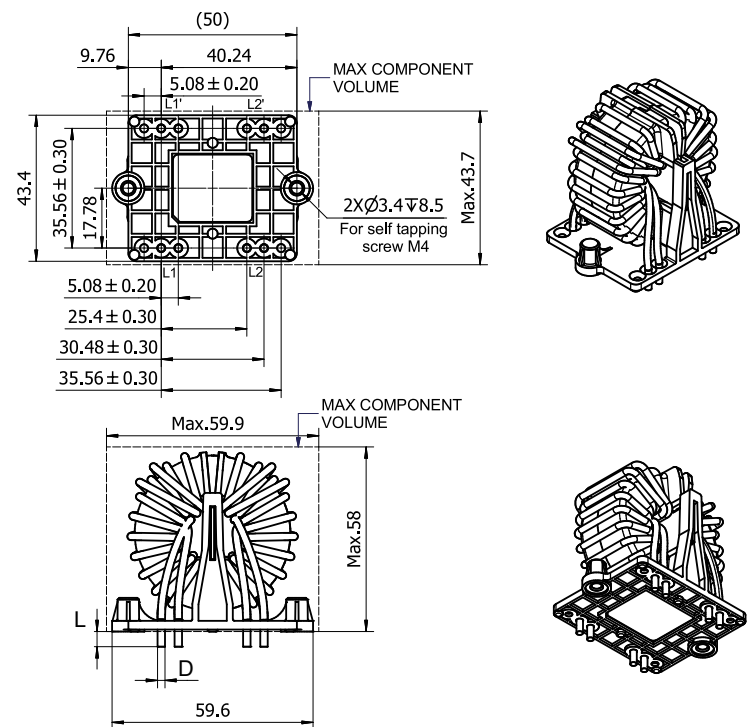

## Size 5 (RB 8522)

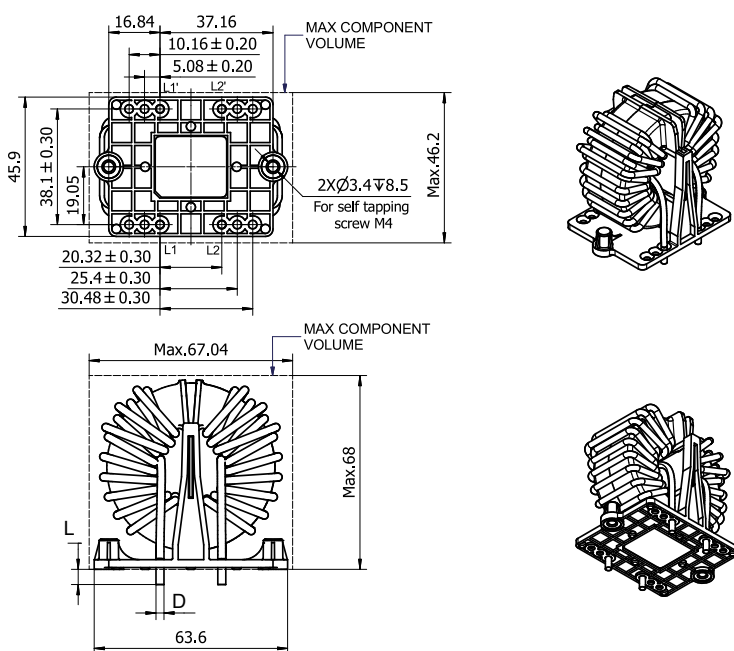





## Size 6 (RB 8522)\*

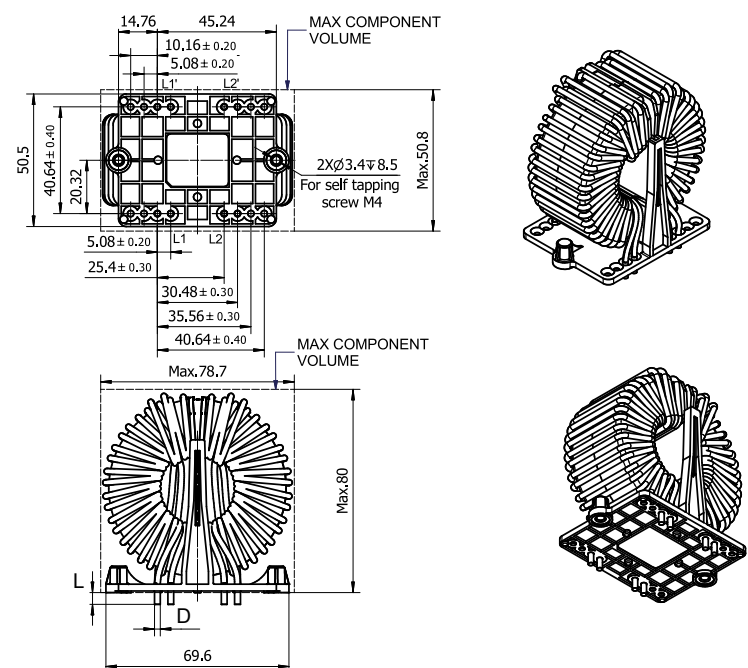



\* These choke sizes do have two parallel wires. Due to manufacturing processes and to cover current ampacity of chokes with high current rating, the number of parallel wires does vary between different sizes.

Mechanical Data: 3-phase Chokes

All dimensions in mm; 1 inch = 25.4 mm  
Tolerances according: ISO 2768-m/EN 22768-m  
Windings of chokes are within max. component dimensions. Windings are illustrated simplified.

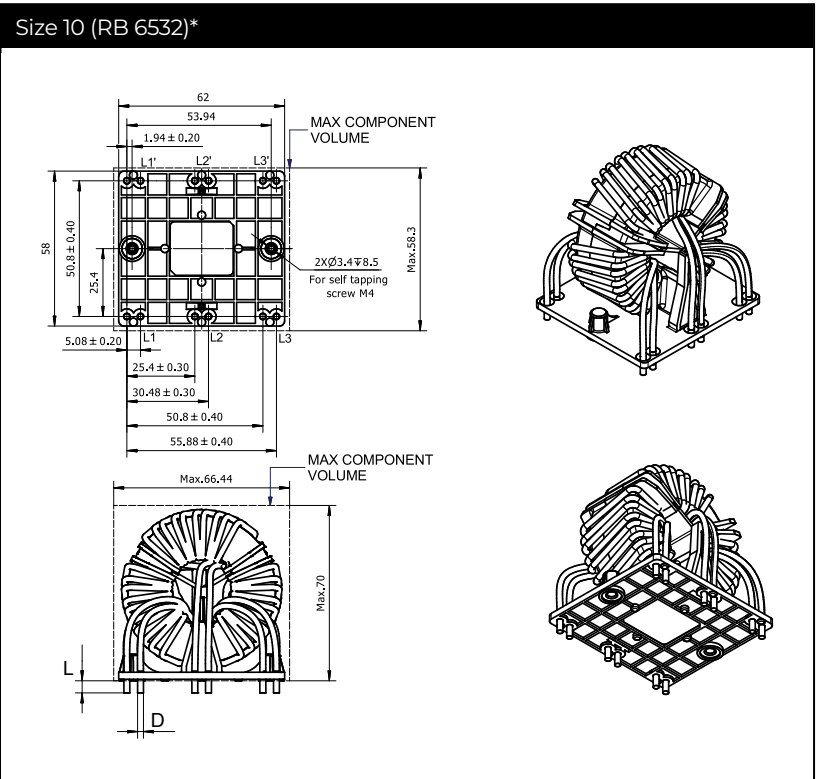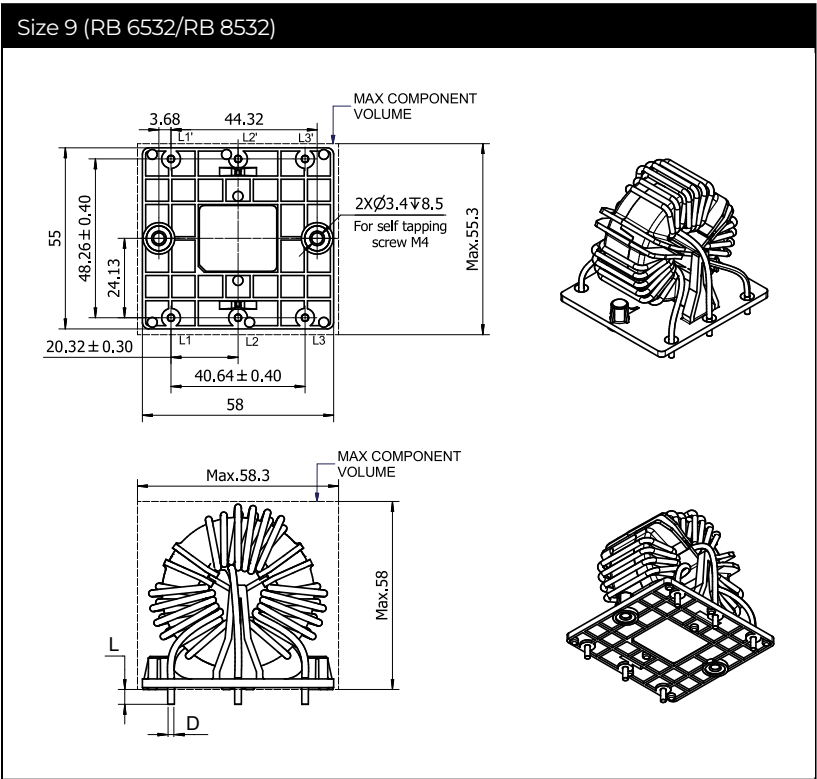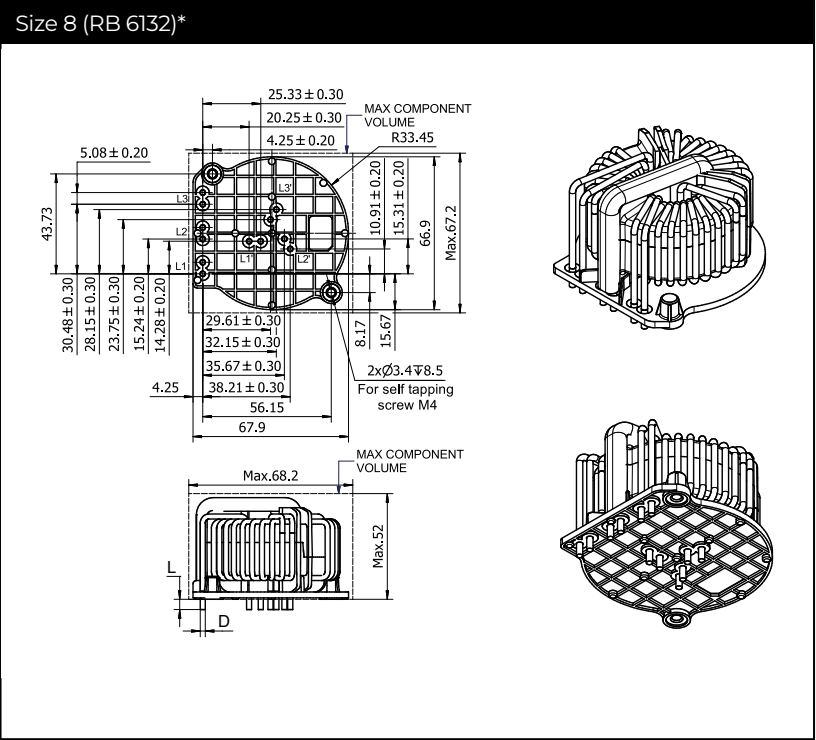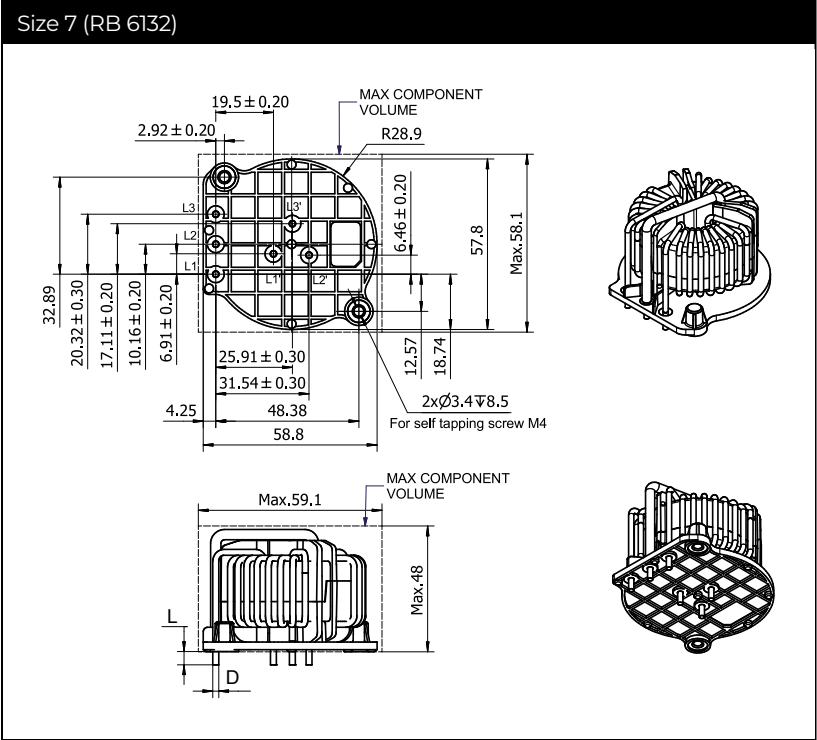

## Size 12 (RB 8532)\*

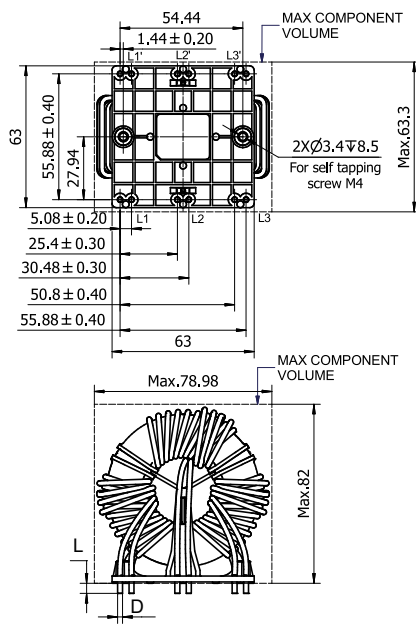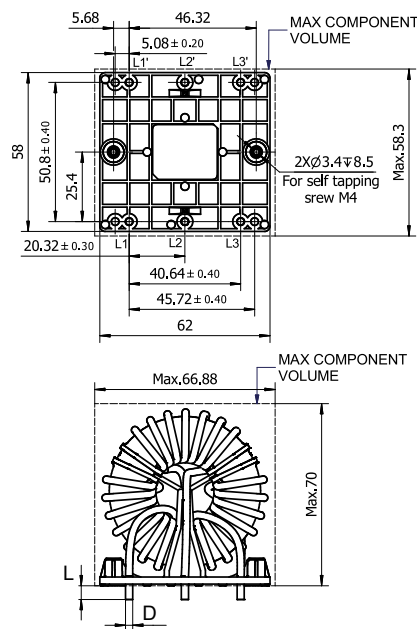

## Available Supporting Material

For all RB choke types an evaluation board is available (not including capacitors and RB chokes)

All boards feature voltage ratings according to the chokes usable on the board - up to 600VAC/1000VDC.


The capacitors used need to be selected according to application and safety level. Recommended are Y1 and X1 capacitors with a voltage rating of at least 600VAC and 1000VDC.

The pitch for Y-capacitors (between phase and PE) is 15 or 22.5 mm. With a max outer dimension of 12 x 26 mm (w x l).


The pitch for X-capacitors (between phases) is 22.5, 27.5 or 37.5 mm. With a max outer dimnesion of 28 x 40 mm (w x l).

For discharge reason a resistor can be fitted in parallel to the X-capacitors.

All connections to the boards are done with M6 screw terminals (recommended torque is 2.5 Nm.

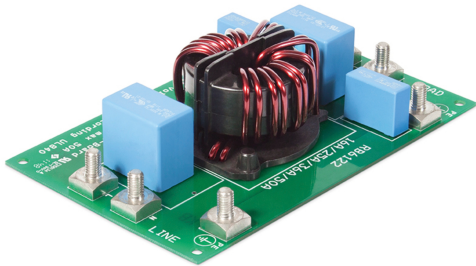

| Selection table<br>RB Choke Type | Nom. Current<br>of RB Choke | Eval. Board | Order<br>Name               | Order<br>Code |
|----------------------------------|-----------------------------|-------------|-----------------------------|---------------|
| [RB XXXX]                        | [Range A]                   | No          |                             |               |
| RB 6122                          | 16 - 50                     | 1           | EVA-BOARD FOR RB6122 SERIES | 813249        |
| RB 6522                          | 16 - 50                     | 2           | EVA-BOARD FOR RB6522 SERIES | 813252        |
| RB 8522                          | 16 - 50                     | 3           | EVA-BOARD FOR RB8522 SERIES | 813254        |
| RB 6132                          | 16 - 25                     | 4           | EVA-BOARD FOR RB6132-16/25  | 813250        |
| RB 6132                          | 36 - 50                     | 5           | EVA-BOARD FOR RB6132-36/50  | 813251        |
| RB 6532                          | 16 - 50                     | 6           | EVA-BOARD FOR RB6532 SERIES | 813253        |
| RB 8532                          | 16 - 50                     | 7           | EVA-BOARD FOR RB8532 SERIES | 813255        |

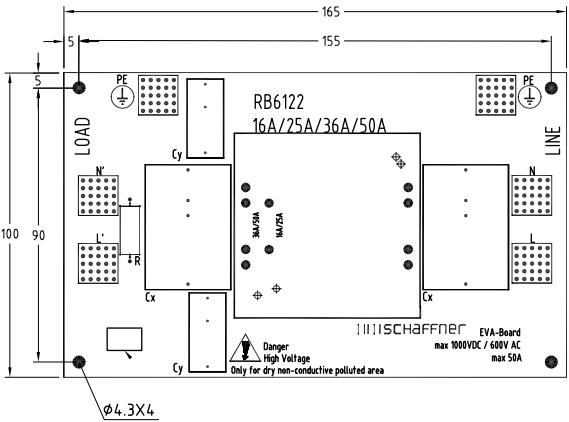

For further drawings and CAD data of the different boards please contact your local Schaffner subsidiary.

## Application Note

## EMC/EMI Filter Design with RB Common Mode-Chokes

This application note addresses experienced engineers, who are familiar with the basics of EMC, and intends to provide additional information about RB choke series and Design support for PCB integrated EMC/EMI filters.

[Link to PDF](#)

Headquarters, Global  
Innovation and  
Development

**Switzerland**  
**Schaffner Holding AG**  
Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[info@schaffner.com](mailto:info@schaffner.com)

To find your local partner within  
Schaffner's global network [schaffner.com](https://www.schaffner.com)

© 2022 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Sales and Application  
Centers

**China**  
**Schaffner EMC Ltd. Shanghai**  
T20-3 C, No 565 Chuangye Road,Pudong district  
201201  
Shanghai  
+86 2138139500  
[cschina@schaffner.com](mailto:cschina@schaffner.com)

**Finland**  
**Schaffner Oy**  
Sauvonrinne 19 H  
8500  
Lohja  
+358 50 468 7284  
[finlandsales@schaffner.com](mailto:finlandsales@schaffner.com)

**France**  
**Schaffner EMC S.A.S.**  
16-20 Rue Louis Rameau  
95875  
Bezons  
+33 1 34 34 30 60  
[francesales@schaffner.com](mailto:francesales@schaffner.com)

**Germany**  
**Schaffner Deutschland GmbH**  
Schoemperlenstrasse 12B  
76185  
Karlsruhe  
+49 721 56910  
[germanysales@schaffner.com](mailto:germanysales@schaffner.com)

**India**  
**Schaffner India Pvt. Ltd**  
Regus World Trade Centre  
WTC, 22nd Floor Unit No 2238, Brigade Gateway Campus, 26/1, Dr. Rajkumar Road Malleshwaram (W)  
560055  
Bangalore  
+91 8067935355  
[indiasales@schaffner.com](mailto:indiasales@schaffner.com)

**Italy**  
**Schaffner EMC S.r.l.**  
Via Ticino, 30  
20900  
Monza (MB)  
+39 039 21 41 070  
[italysales@schaffner.com](mailto:italysales@schaffner.com)

**Japan**  
**Schaffner EMC K.K.**  
ISM Sangenjaya 7F  
1-32-12 Kamiuma, Setagaya-ku  
154-0011  
Tokyo  
+81 3 5712 3650  
[japansales@schaffner.com](mailto:japansales@schaffner.com)

**Singapore**  
**Schaffner EMC Pte Ltd.**  
Blk 3015A Ubi Road 1, #05-09, Kampong Ubi Industrial Estate  
408705  
Singapore  
+65 63773283  
[singaporesales@schaffner.com](mailto:singaporesales@schaffner.com)

**Spain**  
**Schaffner EMC España**  
Calle Caléndula 93, Miniparc III, Edificio E El Soto de Moraleja, Alcobendas  
28109  
Madrid  
+34 917 912 900  
[spainsales@schaffner.com](mailto:spainsales@schaffner.com)

**Sweden**  
**Schaffner EMC AB**  
Östermalmstrorg 1  
114 42  
Stockholm  
+46 8 5050 2425  
[swedensales@schaffner.com](mailto:swedensales@schaffner.com)

**Switzerland**  
**Schaffner EMV AG**  
Industrie Nord  
Nordstrasse 11e  
4542  
Luterbach  
+41 32 681 66 26  
[switzerlandsales@schaffner.com](mailto:switzerlandsales@schaffner.com)

**Taiwan**  
**Schaffner EMV Ltd.**  
U-Town  
20 Floor-2, No 97, Section 1, XinTai 5th Road, XiZhi District  
22175  
New Taipei City  
+886 226975500  
[taiwansales@schaffner.com](mailto:taiwansales@schaffner.com)

**Thailand**  
**Schaffner EMC Co. Ltd.**  
Sathorn Square Tower  
Room 3780, 37FL, 98 North-Sathorn Rd, Silom, Bangrak  
10500  
Bangkok  
+66 621056397  
[thailandsales@schaffner.com](mailto:thailandsales@schaffner.com)

**United Kingdom**  
**Schaffner Ltd.**  
1, Oakmede Place  
Terrace Road  
RG42 4JF  
Binfield  
+44 118 9770070  
[uksales@schaffner.com](mailto:uksales@schaffner.com)

**United States**  
**Schaffner EMC Inc.**  
52 Mayfield Avenue  
Edison, New Jersey  
+1 732 225 9533  
[usasales@schaffner.com](mailto:usasales@schaffner.com)