

Schottky Barrier Diode

multicompPRO

**RoHS
Compliant**



Features

- Low Power Loss, High Efficiency
- Low Forward Voltage Schottky Rectifier
- High Current Capability
- High Surge Capability
- Halogen Free

Schematic and PIN Configuration



Marking Code



Specifications

Forward Current	: 300mA
Reverse Voltage	: 30V
Terminals	: Matte tin plated
Case	: SOD123 Package

Maximum Ratings (@Ta = +25°C, unless otherwise specified.)

Absolute Ratings

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	VRRM	30	V
RMS Voltage	VRMS	21	
DC Blocking Voltage	V DC	30	
Forward Rectified Current	IFM	300	mA
Peak Forward Surge Current @ t = 8.3ms	IFSM	600	mA
Power Dissipation	PD	500	mW
Storage Temperature Range	TSTG	-50 to +150	°C
Thermal Resistance from Junction to Ambient	RθJA	250	°C/W





Electrical Characteristics

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Unit
Reverse Voltage	IR = 100μA	VBR	30	-	-	V
Reverse Current	VR = 25V	IR	-	-	2	μA
Forward Voltage	IF = 0.1mA	VF	-	-	0.24	V
	IF = 1mA		-	-	0.32	
	IF = 10mA		-	-	0.4	
	IF = 30mA		-	-	0.5	
	IF = 100mA		-	-	0.8	
Junction Capacitance	VR = 1V, F = 1MHz	CD	-	-	10	pF


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO

Rating and Characteristic Curves




Diagram

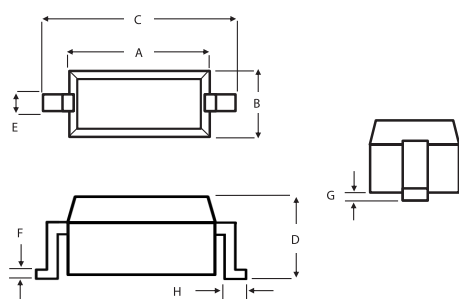

SOD123 Package		
Dim	Min.	Max.
A	2.6	2.8
B	1.5	1.7
C	3.55	3.85
D	1.05	1.25
E	0.45	0.65
F	0.08	0.15
G	—	0.1
H	0.25	0.45

Soldering Pad Layout

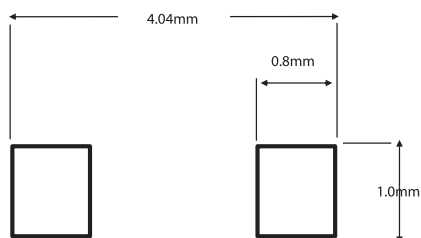

Dimensions : Millimetres

Tolerance $\pm 0.05\text{mm}$

Part Number Table

Description	Part Number
Schottky Barrier Diode, 30V, 300mA, SOD-123	BAT54W

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro

Farnell.com/multicomp-pro

sg.element14.com/b/multicomp-pro