


Photoelectrics Retro-reflective, Polarized Type PH18CNP..., DC

CARLO GAVAZZI



- Miniature sensor range
- Range: 5 m
- Sensitivity adjustment by potentiometer
- Modulated, red light 625 nm
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP, N.O & N.C.
- Degree of protection: IP67, IP69K
- LED indication for output, stability and power ON
- Protection: reverse polarity, short circuit and transients
- Cable, plug and pigtail versions
- Excellent EMC performance

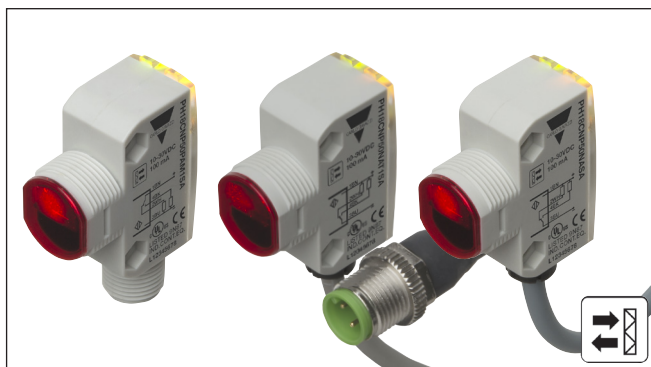

Product Description

The PH18CNP... is part of a family of inexpensive general purpose retro-reflective sensors in industrial standard 18 mm cylindrical and square ABS housing. The sensors are useful in applications where high-accuracy detection as well as small size is required.

Compact housing and high power LED for excellent performance-size ratio. The potentiometer used for adjustment of the sensitivity makes the sensors highly flexible. The output type is NPN or PNP and the output switching function is NO and NC.

Ordering Key

PH18CNP50PAM1SA

Type	_____
Housing style square	_____
Housing size	_____
Housing material	_____
Housing type neutral	_____
Detection principle	_____
Sensing distance	_____
Output type	_____
Output configuration	_____
Connection type	_____
Sensitive adjustment	_____

Type Selection

Housing style	Range S _n	Connection	Ordering no. NPN Make & break switching	Ordering no. PNP Make & break switching
M18 Square type	5.0 m	Cable	PH 18 CNP 50 NASA	PH 18 CNP 50 PASA
M18 Square type	5.0 m	Plug	PH 18 CNP 50 NAM1SA	PH 18 CNP 50 PAM1SA
M18 Square type	5.0 m	Pigtail M12	PH 18 CNP 50 NAT1SA	PH 18 CNP 50 PAT1SA


Specifications according to EN60947-5-2

Rated operating distance (S_n)	Up to 5.0 m, Reference target: ER4 reflector ø 80 mm	Voltage drop (U_d)	≤ 2.0 VDC @ 100 mA
Blind zone	50 mm @ S _n max.	Protection	Short-circuit, reverse polarity and transients
Sensitivity control	Adjustable by potentiometer	Light source	InGaAlP, LED, 625 nm
Electrical adjustment	210°	Light type	Red, modulated
Mechanical adjustment	240°	Sensing angle	± 2°
Adjustable distance to target	50-500 cm	Ambient light	30.000 lux Incandescent lamp
Temperature drift	≤ 0.2%/°C	Light spot Diameter	Ø 150 mm @ 2.5 m
Hysteresis (H) (differential travel)	≤ 20%	Operating frequency	500 Hz
Rated operational volt. (U_B)	10 to 30 VDC (ripple included)	Response time	OFF-ON (t _{ON}) ON-OFF (t _{OFF})
Ripple (U_{RP})	≤ 10%		≤ 1.0 ms ≤ 1.0 ms
Output current		Power ON delay (t_v)	≤ 100 ms
Continuous (I _a)	≤ 100 mA	Output function	
Short-time (I)	≤ 100 mA (max. load capacity 100 nF)	Type	NPN or PNP
No load supply current (I_o)	≤ 25 mA @ 24 VDC	Switching function	NO and NC
Minimum operational current (I_m)	0.5 mA	Indication	
OFF-state current (I_r)	≤ 100 µA	Output ON	LED, yellow
		Signal stability and power ON	LED, green

Specifications (cont.)


Environment	Installation category	III (IEC 60664/60664A; 60947-1)	Cable gland	POM, Black
	Pollution degree	3 (IEC 60664/60664A; 60947-1)	Trimmer shaft	POM, Dark Grey
Ambient temperature	Degree of protection	IP 67, IP 69K*	Locknuts	PP, black
	Operating	-25° to +60°C (-13° to +140°F)	Mounting bracket	PPA, black
Vibration	Storage	-40° to +70°C (-40° to +158°F)	Connection	
			Cable	PVC, grey, 2 m 4 x 0.25 mm ² , Ø = 4.5 mm M12, 4-pin (CON.14NF..W series)
Shock			Plug	PUR, grey, 30 cm 4 x 0.25 mm ² , Ø = 4.5 mm M12, 4-pin (CON.14NF..W series)
			Pigtail	
Rated insulation voltage			Weight	With cable: 85 g With pigtail: 40 g With plug: 25 g
			CE-marking	Yes
Housing material			Approvals	cULus (UL508) supply class 2
	Body	ABS, grey		
	Backpart	PC-Transparent		
	Front material	PMMA, red		

* The IP69K test according to DIN 40050-9 for high-pressure, high-temperature wash-down applications. The sensor must not only be dust tight (IP6X), but also able to withstand high-pressure and steam cleaning. The sensor is exposed to high pressure water from a spray nozzle that is fed with 80°C water at 8'000–10'000 KPa (80–100bar) and a flow rate of 14–6L/min. The nozzle is held 100–150 mm from the sensor at angles of 0°, 30°, 60° and 90° for 30s each. The test device sits on a turntable that rotates with a speed of 5 times per minute. The sensor must not suffer any damaging effects from the high pressure water in appearance and function.




Operation Diagram


tv = Power ON delay

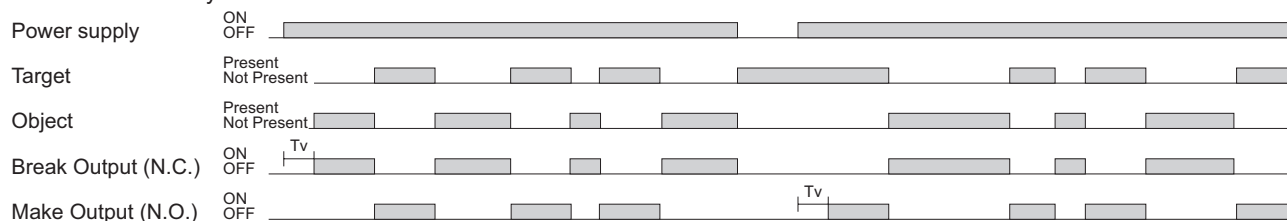


Wiring Diagrams

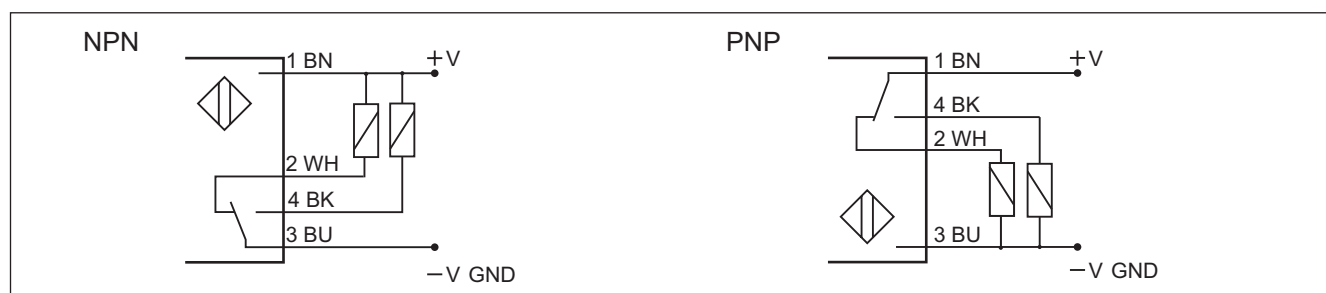


Detection Diagram

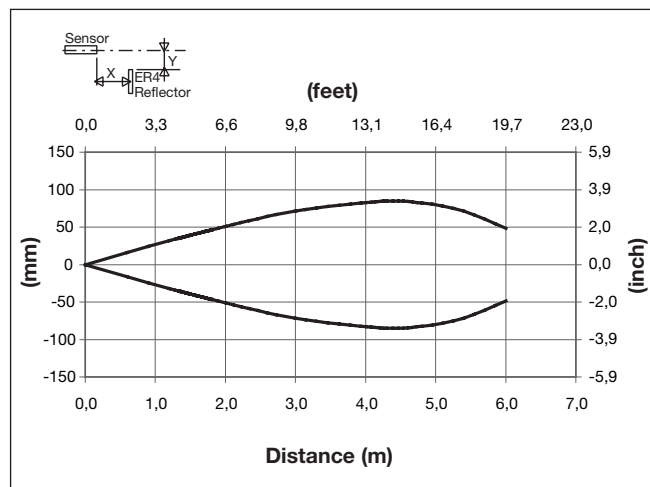


Excess Gain

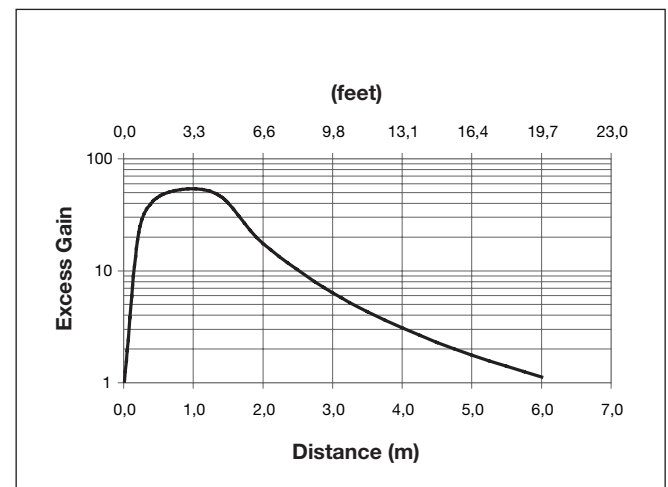


Signal Stability Indication

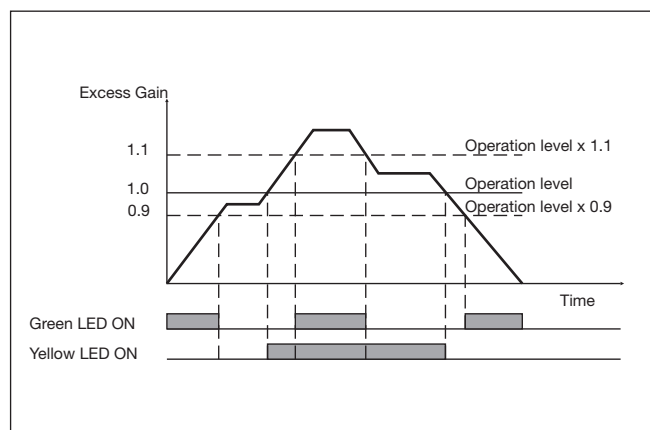


APH18-MB1

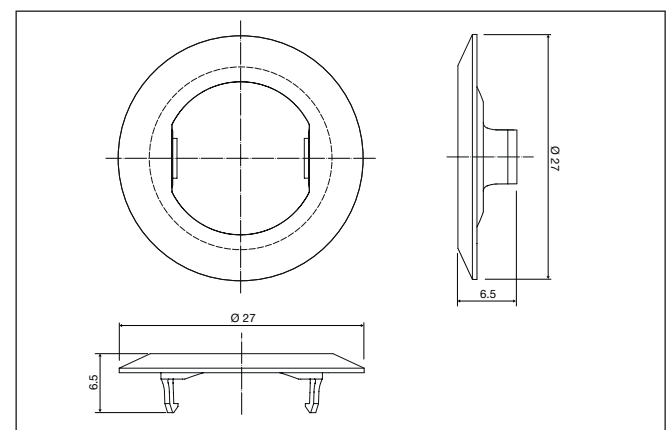

Mounting Systems

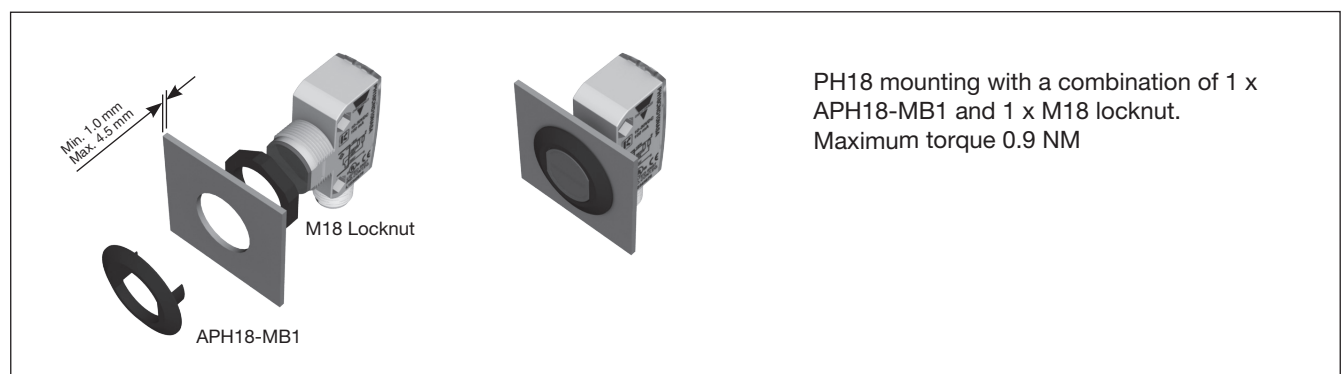

Dimensions

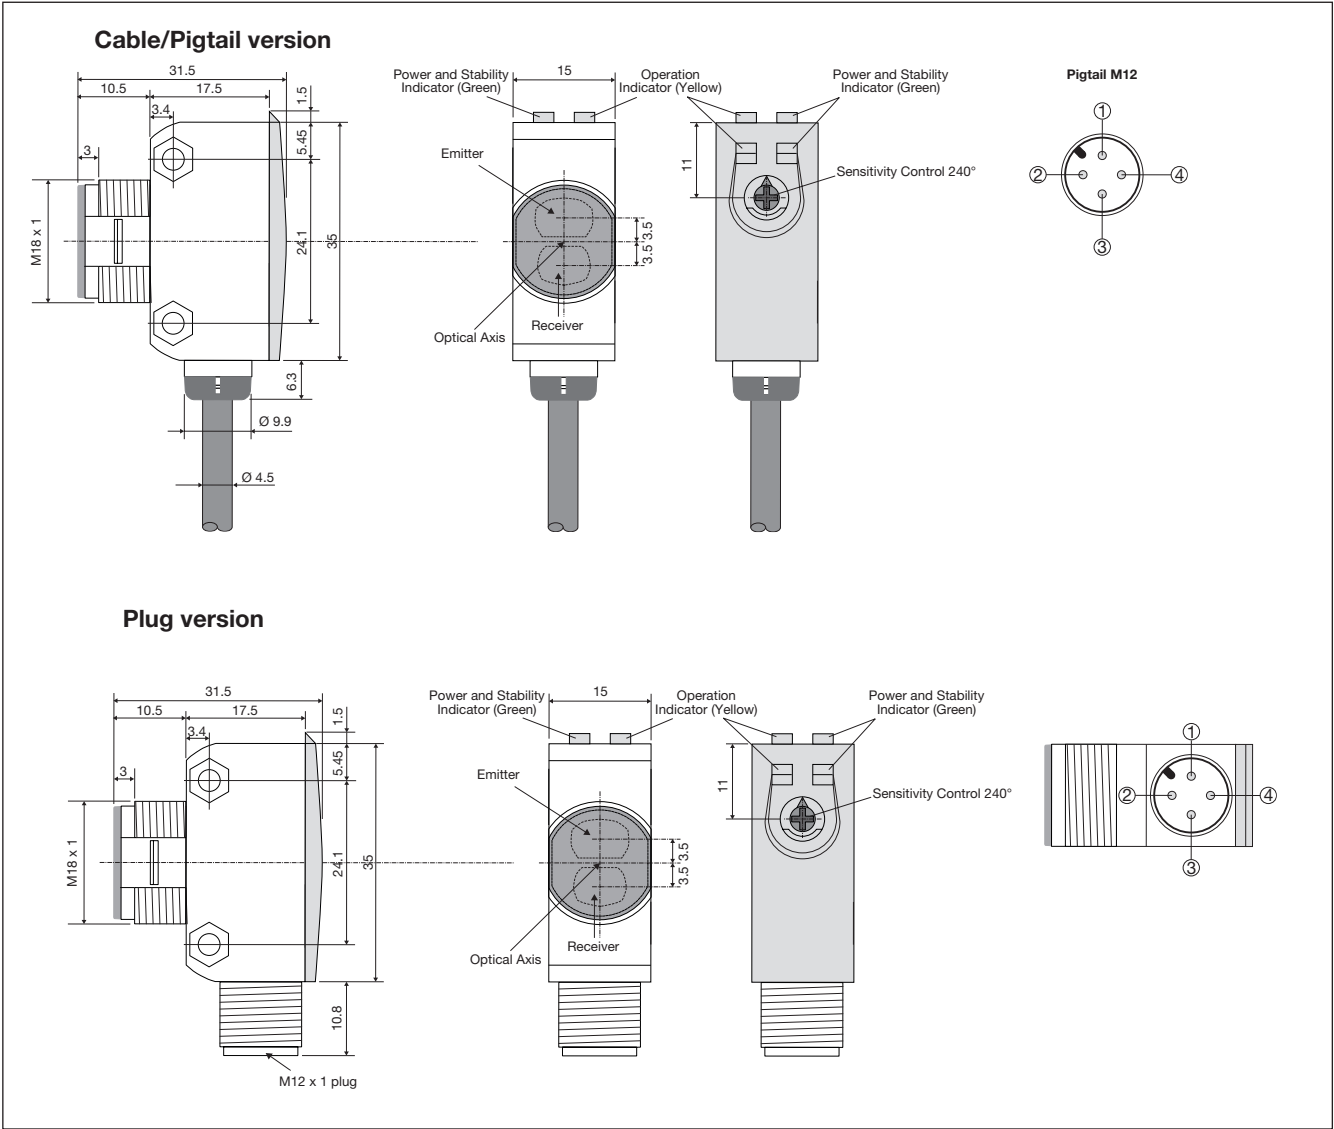

Installation Hints

To avoid interference from inductive voltage / current peaks, separate the proximity switch cables from any other power cables. E.g. Engine, contactor or solenoid cables Incorrect Correct > 100 mm	Relief of the cable strain Incorrect Correct The cable should not be pulled	Protection of the sensing face Incorrect A proximity switch should not serve as mechanical stop	Sensor mounted on a mobile carrier Any repetitive flexing of the cable should be avoided
---	---	--	--

Delivery Contents

- Photoelectric switch: PH 18 CNP...
- Installation instruction on plastic bag
- Screwdriver
- Mounting bracket APH18-MB1
- 1 M18 lock nuts
- **Packaging:** Plastic bag

Accessories

- Connector type CON.14NF..W series
- Reflector type ER.. - to be purchased separately