


Single Bipolar Transistor multicomp^{PRO}



RoHS
Compliant

ABSOLUTE MAXIMUM RATINGS (Ta=25°C unless specified otherwise)

Description	Symbol	BF470	BF472	Unit
Collector Base Voltage(open emitter)	V _{CBO}	>250	>300	V
Collector Emitter Voltage (open base)	V _{CEO}			
Collector Emitter Voltage (RBE <2.7KΩ)	V _{CER}			
Emitter Base Voltage(open collector)	V _{EBO}	>5		
Collector Current	I _C	<30		mA
Collector Current (Peak Value)	I _{CM}	<100		
Total Power Dissipation@ T _c =110°C	P _{tot}	<2		W
Junction Temperature	T _j	<150		°C/W
Storage Temperature	T _{stg}	-65 to +150		

Thermal Resistance

Description	Symbol	Value	Unit
From Junction to case	R _{th(j-c)}	20	K/W
From Junction to ambient	R _{th(j-a)}	100	

Electrical Characteristics (Ta = 25°C Unless otherwise specified)



Description	Symbol	Test Condition	BF470	BF472	Unit
Collector-Cut off Current	I _{CBO}	I _E =0, V _{CB} =200V	<100	--	nA
	I _{CER}	R _{BE} =2.7kΩ, V _{CE} =250V	--	<50	
	I _{CER}	R _{BE} =2.7kΩ, V _{CE} =200V, T _J =150°C	--	<10	μA
Emitter cut off Current	I _{EBO}	V _{EB} =5V, I _C =0	<10		
Breakdown Voltages	V _{CEO}	I _C =1mA, I _B =0	>250	--	V
	V _{CER}	I _C =1μA, R _{BE} =2.7KΩ	--	>300	
	V _{CBO}	I _C =10μA, I _E =0	>250		
	V _{EBO}	I _C =0, I _E =10μA	>5		
DC Current Gain	h _{FE}	I _C =25mA, V _{CE} =20V	>50		
Transition Frequency	f _T	I _C =10mA, V _{CE} =10V	>60		MHz
Feedback Capacitance f=0.5MHz	C _{re}	I _C =0, V _{CE} =30V	>1.8		pF

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp^{PRO}

Single Bipolar Transistor multicomp^{PRO}

Diagram

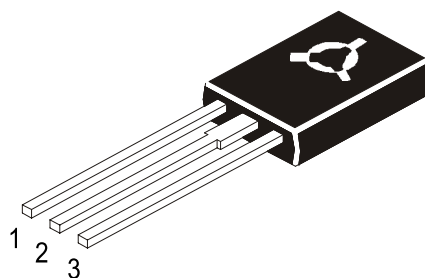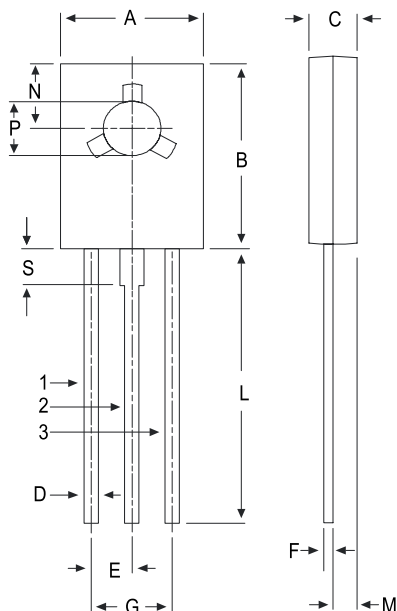

Pin Configuration

1. Emitter
2. Collector
3. Base

DIM	MIN	MAX
A	7.4	7.8
B	10.5	10.8
C	2.4	2.7
D	0.7	0.9
E	2.25 TYP.	
F	0.49	0.75
G	4.5 TYP.	
L	15.7 TYP.	
M	1.27 TYP.	
N	3.75 TYP.	
P	3	3.2
S	2.5 TYP.	

Part Number Table

Description	Part Number
Single Bipolar Transistor, PNP, 250V, 30mA, 2W, TO-126	BF470
Single Bipolar Transistor, PNP, 300V, 30mA, 2W, TO-126	BF472

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp^{PRO}