

# MBE1000 Series

## AC-DC Power Supplies

### Medical

Not For New Design  
Please refer to exact equivalent product series  
**MVPS1000**



The MBE1000 Series medical power supplies, with its wide universal 85 - 264 VAC input range, is available at 1000 W of output power and a variety of single output voltages.

The MBE series is designed and approved to the latest Medical standards (EN/IEC 60601-1), suitable for BF applications.

These medical power supplies are ideal for monitoring, home health equipment as well as surgical devices.

#### Key Features & Benefits

- Form Factor 5 x 9.51 x 1.61 in (127 x 241.5 x 41 mm)
- Approved to EN 60601
- Dual Fusing
- Current Sharing Option
- Peak Power Capability
- Standard IEC 60601-1-2: 2014 (4th Edition)
- 5 VDC Stand by output
- In built 12 V fan output
- Power Good / Power Fail Signal
- Suitable for BF application
- Lesser than 1U high
- High voltage output range up to 58 VDC
- N+1 redundant power supply
- Single wire current sharing
- Built in OR-ing diode / FET (- R suffix)

#### Applications

- |                 |                    |
|-----------------|--------------------|
| • Diagnostic    | • Home Health Care |
| • Drug Pump     | • Monitoring       |
| • Dialysis      | • Imaging          |
| • Hospital Beds | • Therapy Devices  |



**bel** POWER  
SOLUTIONS &  
PROTECTION

a bel group

[belfuse.com/power-solutions](http://belfuse.com/power-solutions)

## 1. MODEL SELECTION

| MODEL NUMBER | VOLTAGE | TYPE       | MAX. LOAD | MIN. LOAD | RIPPLE & NOISE <sup>1</sup> |
|--------------|---------|------------|-----------|-----------|-----------------------------|
| MBE1000-1T12 | 12 V    | Fan Cooled | 41.67 A   | 0.0 A     | 2%                          |
| MBE1000-1T15 | 15 V    | Fan Cooled | 41.67 A   | 0.0 A     | 2%                          |
| MBE1000-1T24 | 24 V    | Fan Cooled | 41.67 A   | 0.0 A     | 2%                          |
| MBE1000-1T30 | 30 V    | Fan Cooled | 33.33 A   | 0.0 A     | 2%                          |
| MBE1000-1T48 | 48 V    | Fan Cooled | 20.83 A   | 0.0 A     | 2%                          |
| MBE1000-1T58 | 58 V    | Fan Cooled | 17.24 A   | 0.0 A     | 2%                          |

<sup>1</sup> For Ripple measurement minimum output power requirement is 25 W.  
Ripple is peak to peak with 20 MHz bandwidth and 10  $\mu$ F (Electrolytic capacitor) in parallel with a 0.1  $\mu$ F capacitor at rated line voltage and load ranges.

## 2. INPUT SPECIFICATIONS

Specifications are for nominal input voltage, 25°C unless otherwise stated.

| PARAMETER           | DESCRIPTION / CONDITION                                                      | SPECIFICATION                     |
|---------------------|------------------------------------------------------------------------------|-----------------------------------|
| Input Voltage       | Universal                                                                    | 85 – 264 VAC / 120 – 390 VDC      |
| Input Frequency     |                                                                              | 47 – 63 Hz                        |
| Input Current       | 120 VAC:<br>240 VAC:                                                         | 11 A max.<br>5.5 A max.           |
| Input Protection    | In Live & Neutral both                                                       | F16 A / 250 V                     |
| No Load Power       | Over entire input range with main output kept <b>OFF</b> using Remote ON/OFF | 3 W typ.                          |
| Inrush Current      | 240 VAC:                                                                     | 25 A max.                         |
| Leakage Current     | 240 VAC / 50 Hz                                                              | 400 $\mu$ A                       |
| Touch Current:      |                                                                              | < 100 $\mu$ A                     |
| Power Factor        | 120 VAC:<br>240 VAC:                                                         | 0.98<br>0.95                      |
| Switching Frequency | PFC converter: Variable<br>Resonant converter: Variable                      | 85 kHz typical<br>100 kHz typical |

### 3. OUTPUT SPECIFICATIONS

| PARAMETER                           | DESCRIPTION / CONDITION                                  | SPECIFICATION                |
|-------------------------------------|----------------------------------------------------------|------------------------------|
| Output Voltage                      | Refer to Model Selection table for details               | 12 V to 58 V                 |
| Standby Output Voltage <sup>2</sup> |                                                          | 5 V                          |
| Output Power <sup>3</sup>           | Fan Cooled (Peak 1200 W for 1 ms)                        | 1000 W                       |
| Efficiency                          | 120 VAC:<br>240 VAC:                                     | 88 % Typical<br>93 %         |
| Hold-up Time                        | 120 VAC / 240 VAC:                                       | 8 ms                         |
| Line Regulation                     |                                                          | ± 0.5 %                      |
| Load Regulation                     |                                                          | ± 1.0 %                      |
| Transient Response                  | 50% to 100% load change, 50 Hz, 50% duty cycle, 0.1 A/μs | < 10 %, recovery time < 5 ms |
| Voltage Adjustment                  |                                                          | ± 3 %                        |
| Set Point Tolerance                 |                                                          | ± 1 %                        |
| Rise Time                           |                                                          | <100 ms                      |
| Over Current Protection             | Hic-Up Type, autorecovery                                | 120 to 150 %                 |
| Over Voltage Protection             | Latch Type, AC Power to be recycled for recovery         | 114%                         |
| Short Circuit Protection            | Short term, autorecovery                                 |                              |
| Over Temperature Protection         | Autorecovery                                             | 130-140°C primary heat sink  |
| Current Share                       | Up to 3 supplies connected in parallel (optional)        |                              |
| Cooling                             | Fan cooled                                               | 1000 W                       |

<sup>2</sup> Standby output voltage 5 V / 1.5 A with tolerance including set point accuracy, line and load regulation is +/-10%. Ripple and noise is less than 5%.

<sup>3</sup> Combined output power of main output, fan supply and standby supply shall not exceed max. power rating.

### 4. EMC SPECIFICATIONS

| PARAMETER                          | DESCRIPTION / CONDITION                                             | CRITERIA           |
|------------------------------------|---------------------------------------------------------------------|--------------------|
| Conducted Emissions                | EN 55011-B, CISPR22-B, FCC PART15-B                                 | Class B            |
| Radiated Emissions                 | EN 55011<br>With External king core K5B RC 25x12x15-M or equivalent | Class A<br>Class B |
| Input Current Harmonics            | EN 61000-3-2                                                        | Class A            |
| Voltage Fluctuation and Flicker    | EN 61000-3-3                                                        | Complies           |
| ESD Immunity                       | EN 61000-4-2                                                        | A                  |
| Radiated Field Immunity            | EN 61000-4-3                                                        | A                  |
| Electrical Fast Transient Immunity | EN 61000-4-4                                                        | A                  |
| Surge Immunity                     | EN 61000-4-5                                                        | A                  |
| Conducted Immunity                 | EN 61000-4-6                                                        | A                  |
| Magnetic Field Immunity            | EN 61000-4-8                                                        | A                  |
| Voltage Dips, Interruptions        | EN 61000-4-11                                                       | A & B              |

## 5. SAFETY SPECIFICATIONS

| PARAMETER          | DESCRIPTION / CONDITION                                                     | SPECIFICATION |
|--------------------|-----------------------------------------------------------------------------|---------------|
| Isolation Voltage  | Input to Output                                                             | 4245 VAC      |
|                    | Input to Earth                                                              | 1625 VAC      |
|                    | Output to Earth                                                             | 1500 VAC      |
| Safety Standard(s) | EN 60601-1, IEC 60601-1 (ed.3), ANSI/AAMI ES 60601-1, CSA C22.2 No. 60601-1 |               |
| Agency Approvals   | Nemko, UL, C-UL                                                             |               |
| CE mark            | Complies with LVD Directive                                                 |               |

## 6. ENVIRONMENTAL SPECIFICATIONS

| PARAMETER             | DESCRIPTION / CONDITION  | SPECIFICATION      |
|-----------------------|--------------------------|--------------------|
| Operating Temperature | Refer to derating curve  | -40 to +70°C       |
| Storage Temperature   |                          | -40 to +85°C       |
| Relative Humidity     | Non-condensing           | 5% to 95%          |
| Altitude              | Operating:               | 16,000 ft.         |
|                       | Non-operating:           | 40,000 ft.         |
| MTBF                  | Telcordia -SR332-issue 3 | 3.37 million hours |

## 7. SIGNALS

| PARAMETER                | DESCRIPTION / CONDITION                                                                                                                            |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Good / Fail Signal | <b>Power Good:</b> Is a TTL signal which goes high after main output reaches 90% of its set value.<br>The delay is 0.1 s to 0.5 s                  |
|                          | <b>Power Fail:</b> The same signal goes low at least 1ms before main output falls to 90% of set value at AC Power off                              |
| Remote Sense             | Compensates for 200 mV drop                                                                                                                        |
| Remote On / Off          | Pin 6 & Pin 7 of J3 can be used for Remote on/off.<br>Shorting Pin 6 to Pin 7 enables main output while keeping the pins open disables main output |
|                          | Note: Provision of Inhibit Remote ON/OFF is available. +5 V at Pin 7 will switch off the main output.                                              |
| OCP Limit Set            | Pin 8 & Pin 9 of J3 must be shorted                                                                                                                |

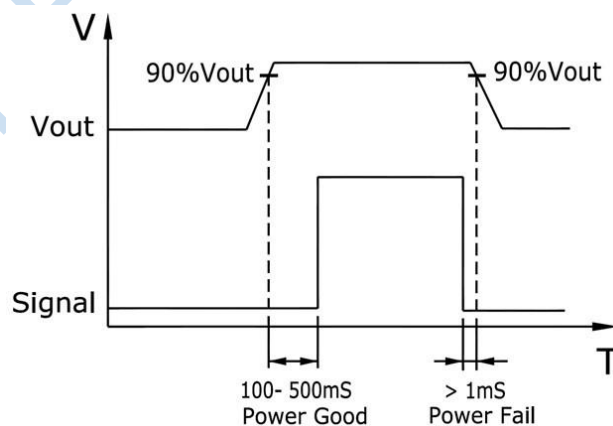


Figure 1. Power Good / Fail Signal Diagram

## 8. CONNECTOR & PIN DESCRIPTION

| CONNECTOR               | PIN             | DESCRIPTION / CONDITION                                                                 |                                                                         | MANUFACTURER / PN                                                                                                                                                                                                                                                                                |
|-------------------------|-----------------|-----------------------------------------------------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC Input Connector      | J1              | Pin 1<br>Pin 2<br>Pin 3                                                                 | AC Line<br>Neutral<br>Earth                                             | TE Connectivity: NC6-P107-03                                                                                                                                                                                                                                                                     |
| DC Output Connector     | J2              | J2-A<br>J2-B                                                                            | +VE<br>-VE                                                              | 6-32 inches Screw Pan HD<br>Mating: Designed to accept Ring Tongue Terminal AMP: 8-31886-1, wherein one 16 AWG (max) wire can be crimped.<br>Note: One Ring Tongue Terminal with 16 AWG is recommended for current up to 11 A only.<br>Use multiple tongue terminals with wire for more current. |
| Signal Connector        | J3 <sup>4</sup> | Pin 1<br>Pin 2<br>Pin 3<br>Pin 4<br>Pin 5<br>Pin 6<br>Pin 7<br>Pin 8<br>Pin 9<br>Pin 10 | GND<br>5V AUX<br>PGPF<br>VS –<br>VS +<br>GND<br>RMT<br>CL2<br>CL1<br>LS | Molex: 22-23-2101<br>Mating: 22-01-2107; Pins: 08-50-0113                                                                                                                                                                                                                                        |
| Fan Output <sup>5</sup> | J10, J11        | Pin 1<br>Pin 2                                                                          | +VE<br>-VE                                                              | TE Connectivity AMP Connectors<br>Description: CONN HEADER VERT 2 POS 2.54 mm, MPN: 640456-2<br>Mating: 3-641535-2 / TE Connectivity AMP Connectors or: 0022013027 / MOLEX with crimping 08-50-0114 / MOLEX                                                                                      |

<sup>4</sup> PSU is supplied with J3, pin-6 and pin-7 shorted to enable main output without remote on/off feature.

<sup>5</sup> Fan supply output voltage is 12 V / 500 mA with regulation band  $\pm 30\%$  and Ripple is less than 10%. To get 12 V Fan supply output voltage, minimum 10 % load on Main output voltage is required.

## 9. DERATING CURVES



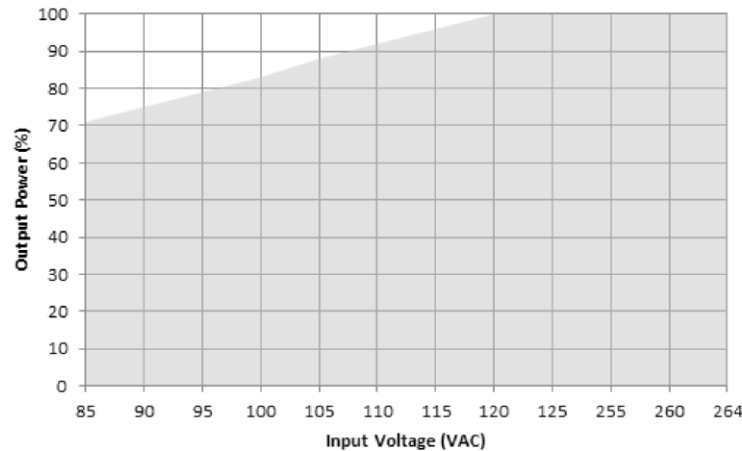


Figure 1. Power Derating w.r.t Input

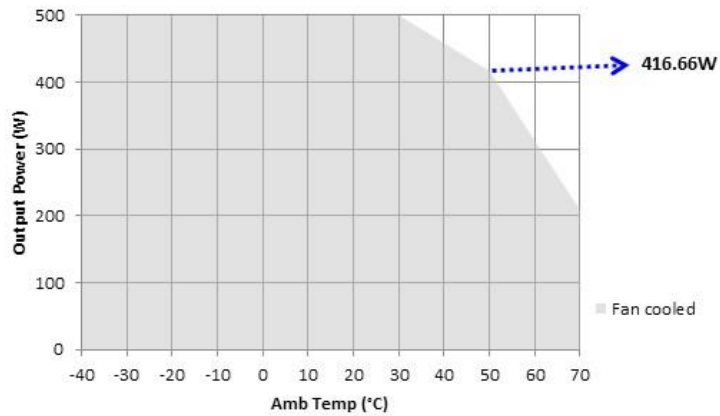


De-rate between 30-50 °C @ 0.833% per °C  
De-rate above 50 °C @ 2.5% per °C

Figure 2. Power Derating Curve 12 V

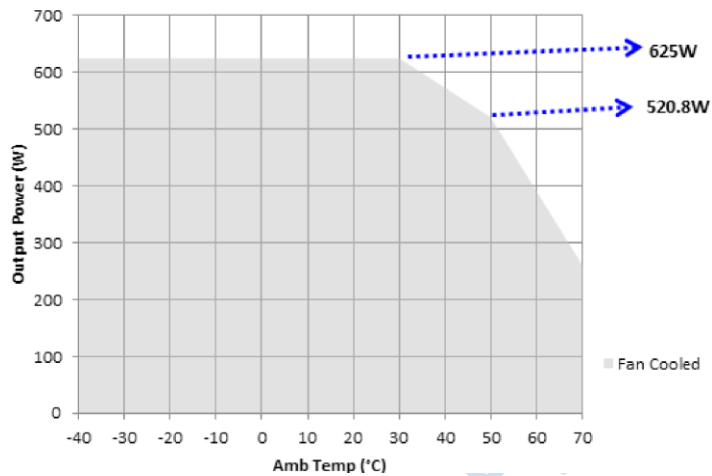

De-rate between 30-50 °C @ 0.833% per °C  
De-rate above 50 °C @ 2.5% per °C

Figure 3. Power Derating Curve 15 V

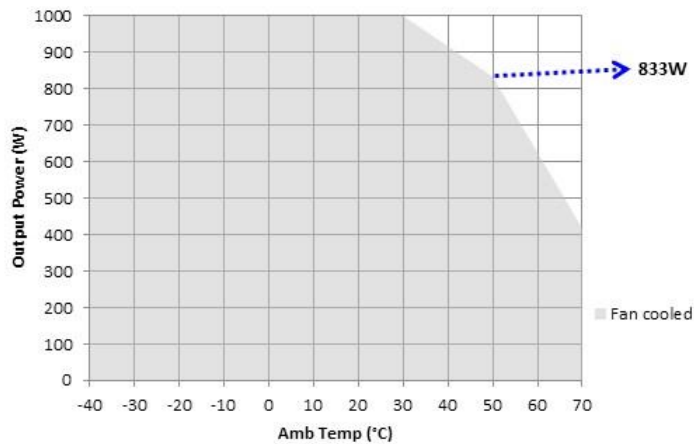


De-rate between 30-50 °C @ 0.833% per °C  
De-rate above 50 °C @ 2.5% per °C

Figure 4. Power Derating Curve 24 V and above

## 10. MECHANICAL SPECIFICATIONS

| PARAMETER  | DESCRIPTION / CONDITION                      |
|------------|----------------------------------------------|
| Weight     | 1300 g                                       |
| Dimensions | 127 x 241.5 x 41 mm (5 x 9.51 x 1.61 inches) |

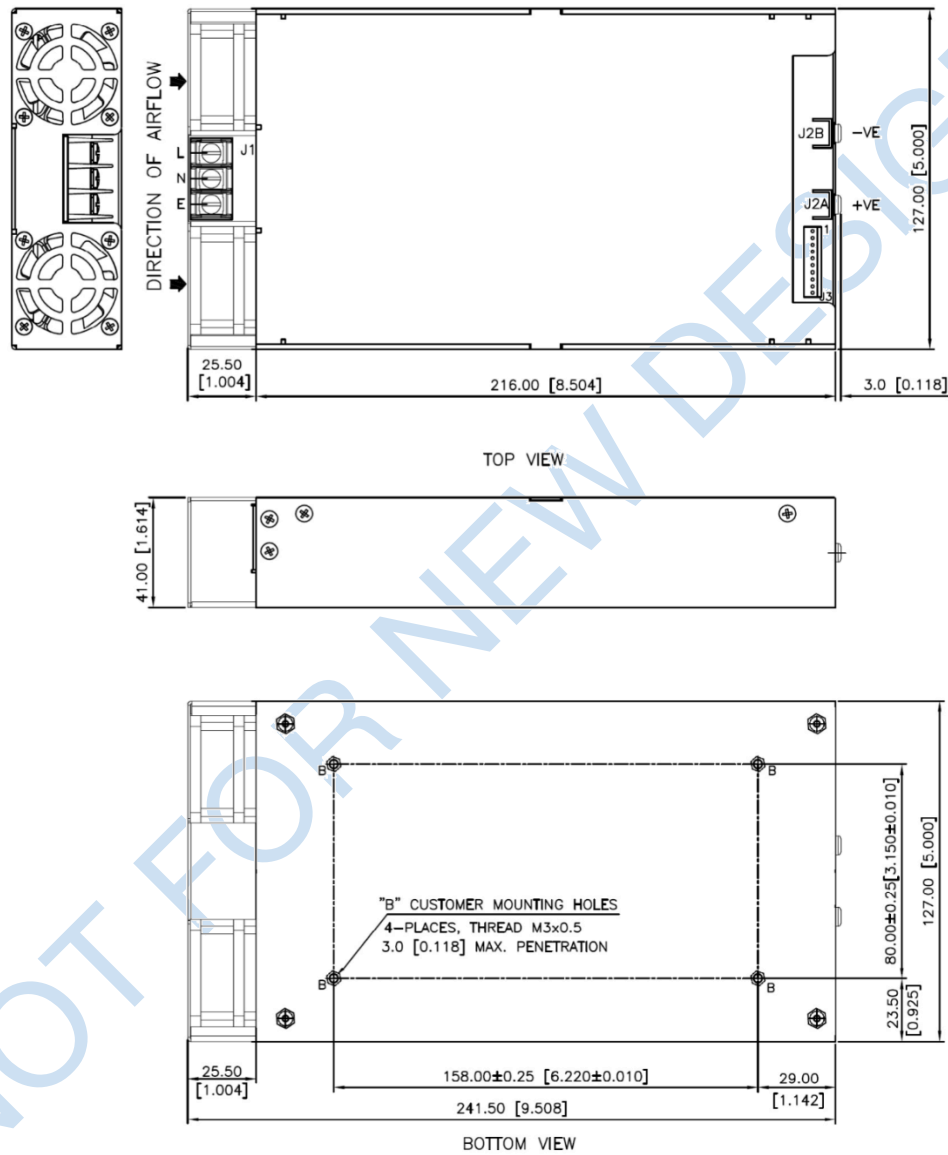

MECHANICAL OUTLINE DIMENSIONS  
ALL DIMENSIONS ARE IN MM [INCHES]  
GEN.TOLERANCE:±1.0 MM [±0.04]

Figure 6. Mechanical drawings

## 11. INSTALLTION INSTRUCTION FOR CURRENT SHARING

During the installation and setup of parallel supplies in a system it is important that a single remote sense point be used for all the supplies. The remote sense voltage between the supplies must be adjusted to within 1% to ensure the supplies are inside the 1% capture window. If the supplies are not initially adjusted inside the capture window the supplies will not current share satisfactorily.

### SET-UP PROCEDURE:

1. Connect load cables to the outputs of each supply.
2. Connect the remote sense lines to the load in twisted style. (A common remote sense point must be used for all the supplies in parallel).
3. Connect all the "LS" signal (Pin 10) on the J3 connector between the supplies.
4. Adjust remote sense voltage of each supply to within 1% of rated output voltage or readjust to required set point. (Adjustment to be done with all other parallel supplies off).
5. Current sharing between the supplies can be verified by monitoring the output current of each supply with a hall effect DC current probe. The supplies should share to within 10% of the total load current.
6. The current share circuit has a capture window voltage of  $\pm 1\%$  of the rated output voltage. If the output remote sense voltage of one of the supplies is adjusted outside the 1% window the supplies will not current share satisfactorily.

### CURRENT SHARING BLOCK DIAGRAM

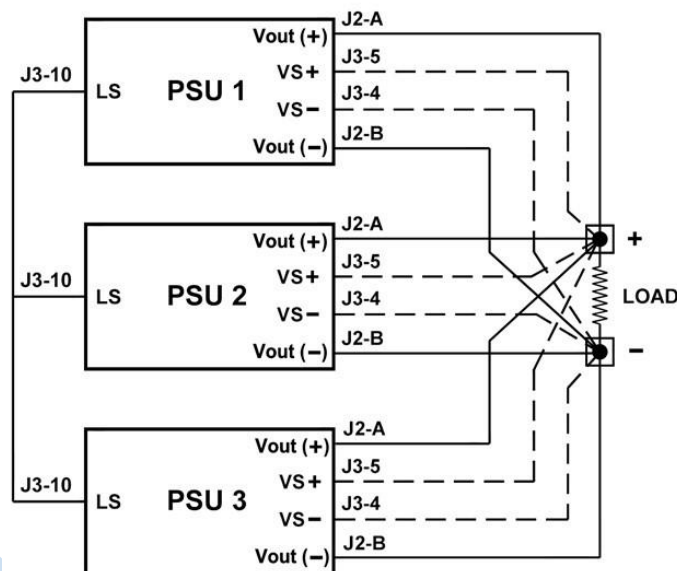


Figure 7. Current Sharing Block Diagram

For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.