

### FEATURES:

- High Density uPOL Module
- 2A Output Current
- Input Voltage Range from 2.7V to 5.5V
- Adjustable Output Voltage
- Enable / Power Good Function
- Forced PWM Mode
- Protections (input UVLO, OCP: Non-latching, OTP, OVP)
- Internal Soft Start 2.1mS
- Compact Size: 3.5mm\*2.5mm\*1.5mm
- Pb-free for RoHS compliant
- 100% dropout voltage
- MSL 2, 260°C Reflow

### GENERAL DESCRIPTION:

The uPOL module is non-isolated dc-dc converters that can deliver up to 2A of output current. The PWM switching regulator, high frequency power inductor are integrated in one hybrid package. It only needs input/output capacitors and voltage dividing resistors.

The module was forced PWM mode, through constant on-time control. The module offers a simpler control loop and faster transient response. Other features include remote enable function, internal soft-start, non-latching over current protection, power good, and input under voltage locked-out capability.

The low profile and compact size package is suitable for automated assembly by standard surface mount equipment.

### APPLICATIONS:

- 100G/400G/800G Optical module
- Server power / telecom power
- SSD

### TYPICAL APPLICATION CIRCUIT& PACKAGE:

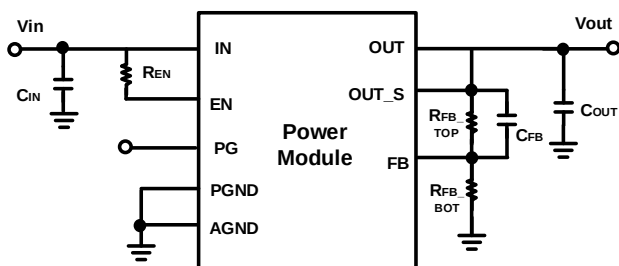


FIG.1 TYPICAL APPLICATION CIRCUIT

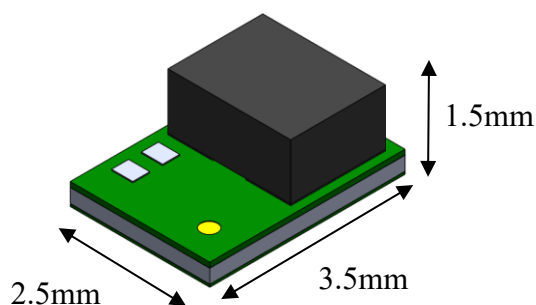



FIG.2 HIGH DENSITY uPOL MODULE

## ORDER INFORMATION:

| Part Number  | Ambient Temp. Range (°C) | Package (Pb-Free) | MSL     | Note |
|--------------|--------------------------|-------------------|---------|------|
| MUN3CAD02-JE | -40 ~ +105               | QFN               | Level 2 | -    |

| Order Code   | Packing       | Quantity |
|--------------|---------------|----------|
| MUN3CAD02-JE | Tape and reel | 2000     |

## PIN CONFIGURATION:

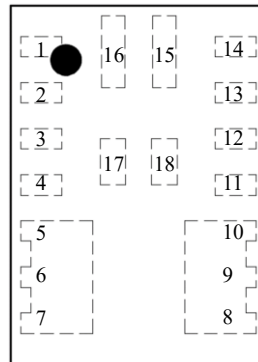

**TOP VIEW**

## PIN DESCRIPTION:

| Symbol | Pin No. | Description                                                                               |
|--------|---------|-------------------------------------------------------------------------------------------|
| AGND   | 1       | Analog ground. The internal controller ground                                             |
| FB     | 2       | Feedback input. Connect an external resistor divider from the output to FB and FB to GND. |
| OUT_S  | 3       | Output Voltage Sense Pin.                                                                 |
| EN     | 4       | Enable control. Do not be float.                                                          |
| SW     | 5~7、15  | Switch node. Leave it no connection.                                                      |
| OUT    | 8~10    | Power output pin.                                                                         |
| NC     | 11      | No connection. Float NC or connect NC to GND                                              |
| PG     | 12      | Power Good indicator. Power Good indicator. With internal 500kΩ pull-up resistor to VIN.  |
| IN     | 13~14   | Power input pin.                                                                          |
| PGND   | 16      | Power ground.                                                                             |
| NC     | 17~18   | No connection. Leave NC floating.                                                         |

## ELECTRICAL SPECIFICATIONS:

CAUTION: Do not operate at or near absolute maximum rating listed for extended periods of time. This stress may adversely impacted product reliability and result in failures not covered by warranty.

| Parameter                          | Description                                                     | Min. | Typ. | Max.    | Unit |
|------------------------------------|-----------------------------------------------------------------|------|------|---------|------|
| ■ Absolute Maximum Ratings         |                                                                 |      |      |         |      |
| VIN to GND                         |                                                                 | -0.3 | -    | +6.0    | V    |
| VOUT to GND                        |                                                                 | -    | -    | +6.0    | V    |
| SW to GND                          |                                                                 | -0.3 | -    | VIN+0.3 | V    |
| The other pin to GND               |                                                                 | -0.3 | -    | +6.0    | V    |
| Tc                                 | Case Temperature of Inductor                                    | -    | -    | +110    | °C   |
| Tj                                 | Junction Temperature                                            | -40  | -    | +150    | °C   |
| Tstg                               | Storage Temperature                                             | -40  | -    | +125    | °C   |
| ESD Rating                         | Human Body Model (HBM)                                          | -    | -    | 2k      | V    |
|                                    | Machine Model (MM)                                              | -    | -    | 200     | V    |
|                                    | Charge Device Model (CDM)                                       | -    | -    | 1000    | V    |
| ■ Recommendation Operating Ratings |                                                                 |      |      |         |      |
| VIN                                | Input Supply Voltage                                            | +2.7 | -    | +5.5    | V    |
| VOUT                               | Output Setting Voltage                                          | +0.6 | -    | +3.3    | V    |
| Ta                                 | Ambient Temperature                                             | -40  | -    | +105    | °C   |
| Tj                                 | Junction Temperature                                            | -40  | -    | +135    | °C   |
| ■ Thermal Information              |                                                                 |      |      |         |      |
| Rth(jchoke-a)                      | Thermal resistance from junction to ambient, Ta = 25°C (Note 1) | -    | 50.3 | -       | °C/W |

### NOTES:

1. Rth(jchoke-a) is measured with the component mounted on an effective thermal conductivity test board on 0 LFM condition. The test board size is 30mm×30mm×1.6mm with 4 layers, 2 oz per layer. The test condition is complied with JEDEC E11/JESD 51 Standards.

**ELECTRICAL SPECIFICATIONS:(Cont.)**

Conditions:  $T_A = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified. Test Board Information: 30mm×30mm×1.6mm, 4 layers 2 oz. The output ripple and transient response measurement is short loop probing and 20MHz bandwidth limited.  $V_{in} = 3.3\text{V}$ ,  $V_{out} = 1.8\text{V}$ ,  $C_{in} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $C_{out} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $R_{FB\_top} = 100\text{k}\Omega$ ,  $C_{FB} = 100\text{pF}$ .

| Symbol                   | Parameter                   | Conditions                                                                                | Min. | Typ. | Max. | Unit             |
|--------------------------|-----------------------------|-------------------------------------------------------------------------------------------|------|------|------|------------------|
| ■ Input Characteristics  |                             |                                                                                           |      |      |      |                  |
| $V_{in}$                 | Input voltage range         |                                                                                           | +2.7 | -    | +5.5 | V                |
| UVLO                     | Input Under voltage lockout | $V_{in}$ increasing                                                                       | 2.3  | 2.4  | 2.5  | V                |
| $I_{SD}$                 | Input shutdown current      | $V_{in}=3.3\text{V}$ , $EN=\text{GND}$                                                    | -    | 5.0  | -    | $\mu\text{A}$    |
| $I_{IN}$                 | Input supply bias current   | $V_{in}=3.3\text{V}$ , $I_{out}=0\text{A}$<br>$V_{out}=1.8\text{V}$ , $EN=\text{HIGH}$    | -    | 12   | -    | mA               |
| $I_S$                    | Input supply current        | $V_{in}=3.3\text{V}$ , $EN=\text{HIGH}$<br>$I_{out}=2.0\text{A}$<br>$V_{out}=1.8\text{V}$ | -    | 1.22 | -    | A                |
| ■ Output Characteristics |                             |                                                                                           |      |      |      |                  |
| $I_{OUT(DC)}$            | Output current              |                                                                                           | 0    | -    | 2    | A                |
| $V_{FBREF}$              | Feedback Regulation Voltage |                                                                                           | 591  | 600  | 609  | mV               |
| $R_{DR}$                 | Dropout resistance          | 100% on duty                                                                              | -    | 90   | -    | $\text{m}\Omega$ |
| TSS                      | Soft start                  |                                                                                           | -    | 2.1  | -    | mS               |


**ELECTRICAL SPECIFICATIONS:(Cont.)**

Conditions:  $T_A = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified. Test Board Information: 30mm×30mm×1.6mm, 4 layers 2 oz. The output ripple and transient response measurement is short loop probing and 20MHz bandwidth limited.  $V_{in} = 3.3\text{V}$ ,  $V_{out} = 1.8\text{V}$ ,  $C_{in} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $C_{out} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $R_{FB\_top} = 100\text{k}\Omega$ ,  $C_{FB} = 100\text{pF}$ .

| Symbol                    | Parameter                        | Conditions                                                    | Min. | Typ. | Max. | Unit               |
|---------------------------|----------------------------------|---------------------------------------------------------------|------|------|------|--------------------|
| ■ Control Characteristics |                                  |                                                               |      |      |      |                    |
| $V_{EN\_TH}$              | Enable upper threshold voltage   | $V_{EN\_TH}$ rising                                           | 1.17 | 1.2  | 1.23 | V                  |
|                           | Enable lower threshold voltage   | $V_{EN\_TH}$ falling                                          | 1.07 | 1.1  | 1.13 | V                  |
| $EN_{PDR}$                | Internal Pull Down Resistor      |                                                               | -    | 1    | -    | $\text{M}\Omega$   |
| $F_{OSC}$                 | Oscillator frequency             | PWM Operation                                                 | -    | 1.2  | -    | MHz                |
| $V_{PGUV\_TH}$            | PG Under-Voltage Lower Threshold | $V_{FB}$ rising, PG Low-to-HiZ, % with respect to $V_{FREF}$  | -    | -10  | -    | %                  |
| $V_{PGUV\_HY}$            | PG Under-Voltage Hysteresis      | $V_{FB}$ falling, PG HiZ-to-Low % with respect to $V_{FREF}$  | -    | -15  | -    | %                  |
| $V_{PGOV\_HY}$            | PG Over-Voltage Hysteresis       | $V_{FB}$ rising, PG HiZ-to-Low % with respect to $V_{FREF}$   | -    | 15   | -    | %                  |
| $V_{PGOV\_TH}$            | PG Over-Voltage Upper Threshold  | $V_{FB}$ falling, PG Low-to-HiZ, % with respect to $V_{FREF}$ | -    | 10   | -    | %                  |
| $PG_{PUR}$                | PG Pull-up resister              |                                                               | -    | 500  | -    | $\text{K}\Omega$   |
| $V_{PG\_LV}$              | PG logic low voltage             | $I_{PG} = 1\text{mA}$                                         | -    | 0.2  | 0.3  | V                  |
| ■ Fault Protection        |                                  |                                                               |      |      |      |                    |
| $I_{LIMIT\_TH}$           | Current limit threshold          | Peak value of output current                                  | -    | 5.2  | -    | A                  |
| $T_{OTP}$                 | Over temperature protection      |                                                               | -    | 160  | -    | $^{\circ}\text{C}$ |
| $T_{HY}$                  | Thermal Shutdown Hysteresis      |                                                               | -    | 30   | -    | $^{\circ}\text{C}$ |
| OVP                       | Over voltage protection          | $V_{FB}$ rising, % with respect to $V_{REF}$                  | +18  | +20  | +22  | %                  |


## TYPICAL PERFORMANCE CHARACTERISTICS:

Conditions:  $T_A = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified. Test Board Information: 30mm×30mm×1.6mm, 4 layers 2oz. The output ripple and transient response measurement is short loop probing and 20MHz bandwidth limited.  $C_{in} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $C_{out} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $R_{FB\_top} = 100\text{k}\Omega$ ,  $C_{FB} = 100\text{pF}$ . The following figures provide the typical characteristic curves at 1.0Vout.

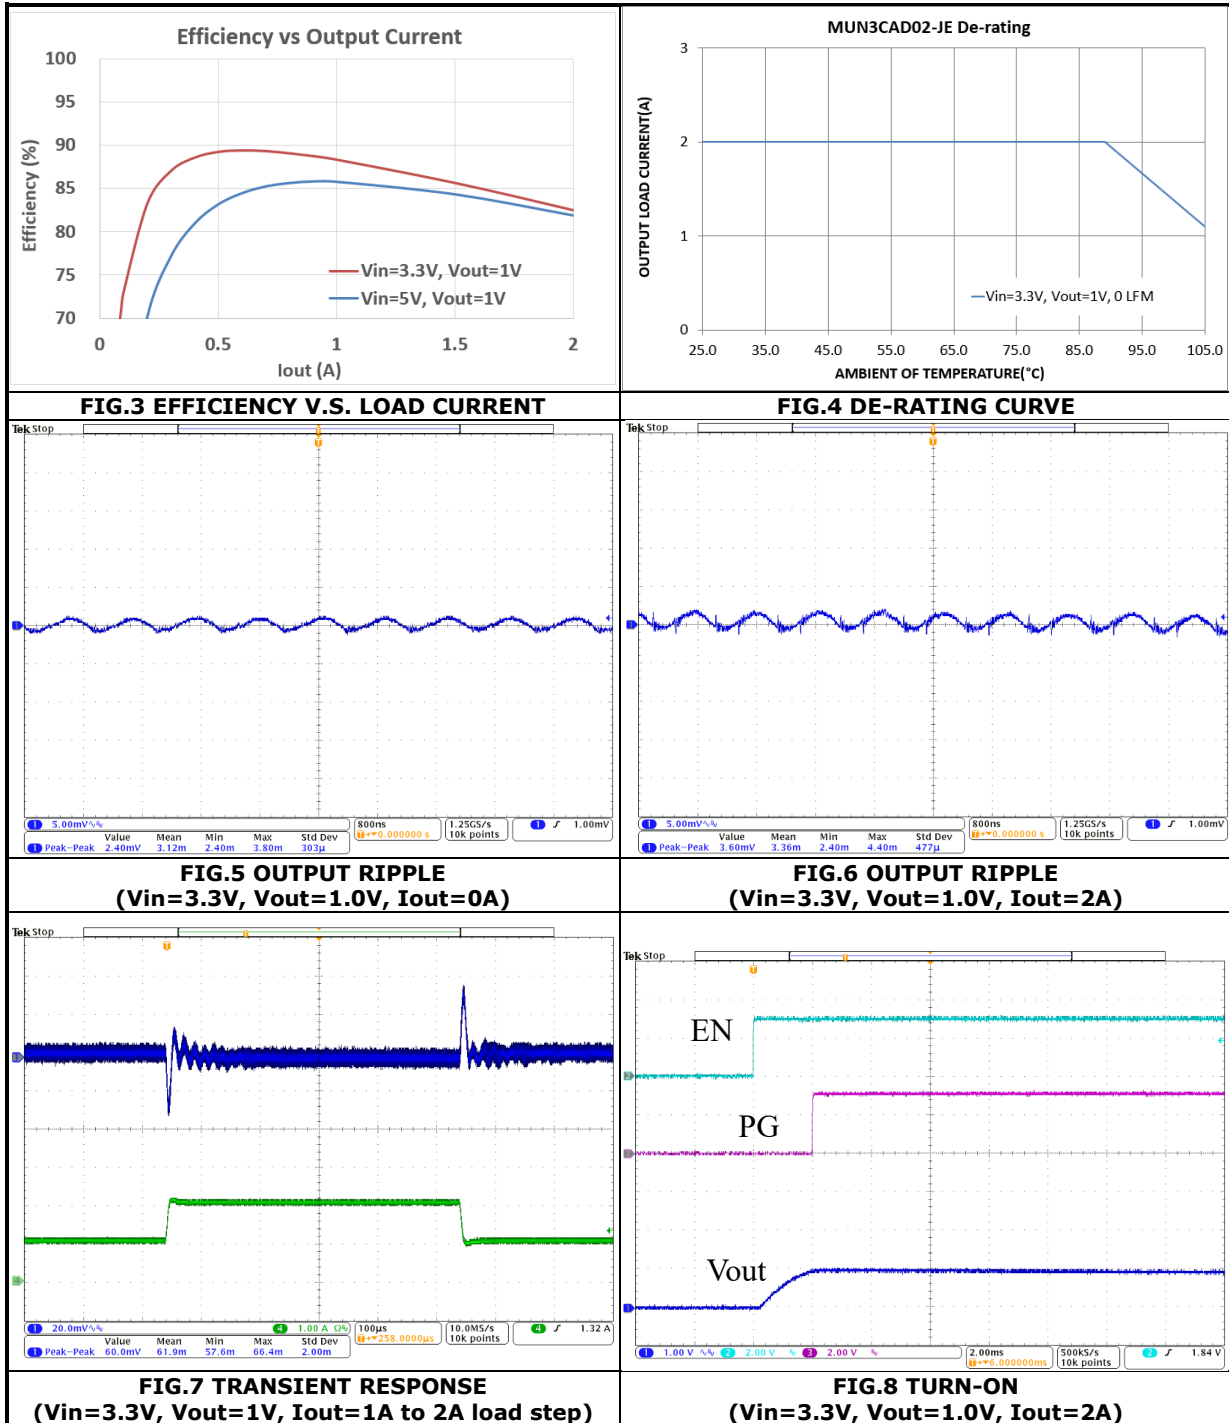


## TYPICAL PERFORMANCE CHARACTERISTICS:

Conditions:  $T_A = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified. Test Board Information: 30mm×30mm×1.6mm, 4 layers 2oz. The output ripple and transient response measurement is short loop probing and 20MHz bandwidth limited.  $C_{in} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $C_{out} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $R_{FB\_top} = 100\text{k}\Omega$ ,  $C_{FB} = 100\text{pF}$ . The following figures provide the typical characteristic curves at 1.8Vout.

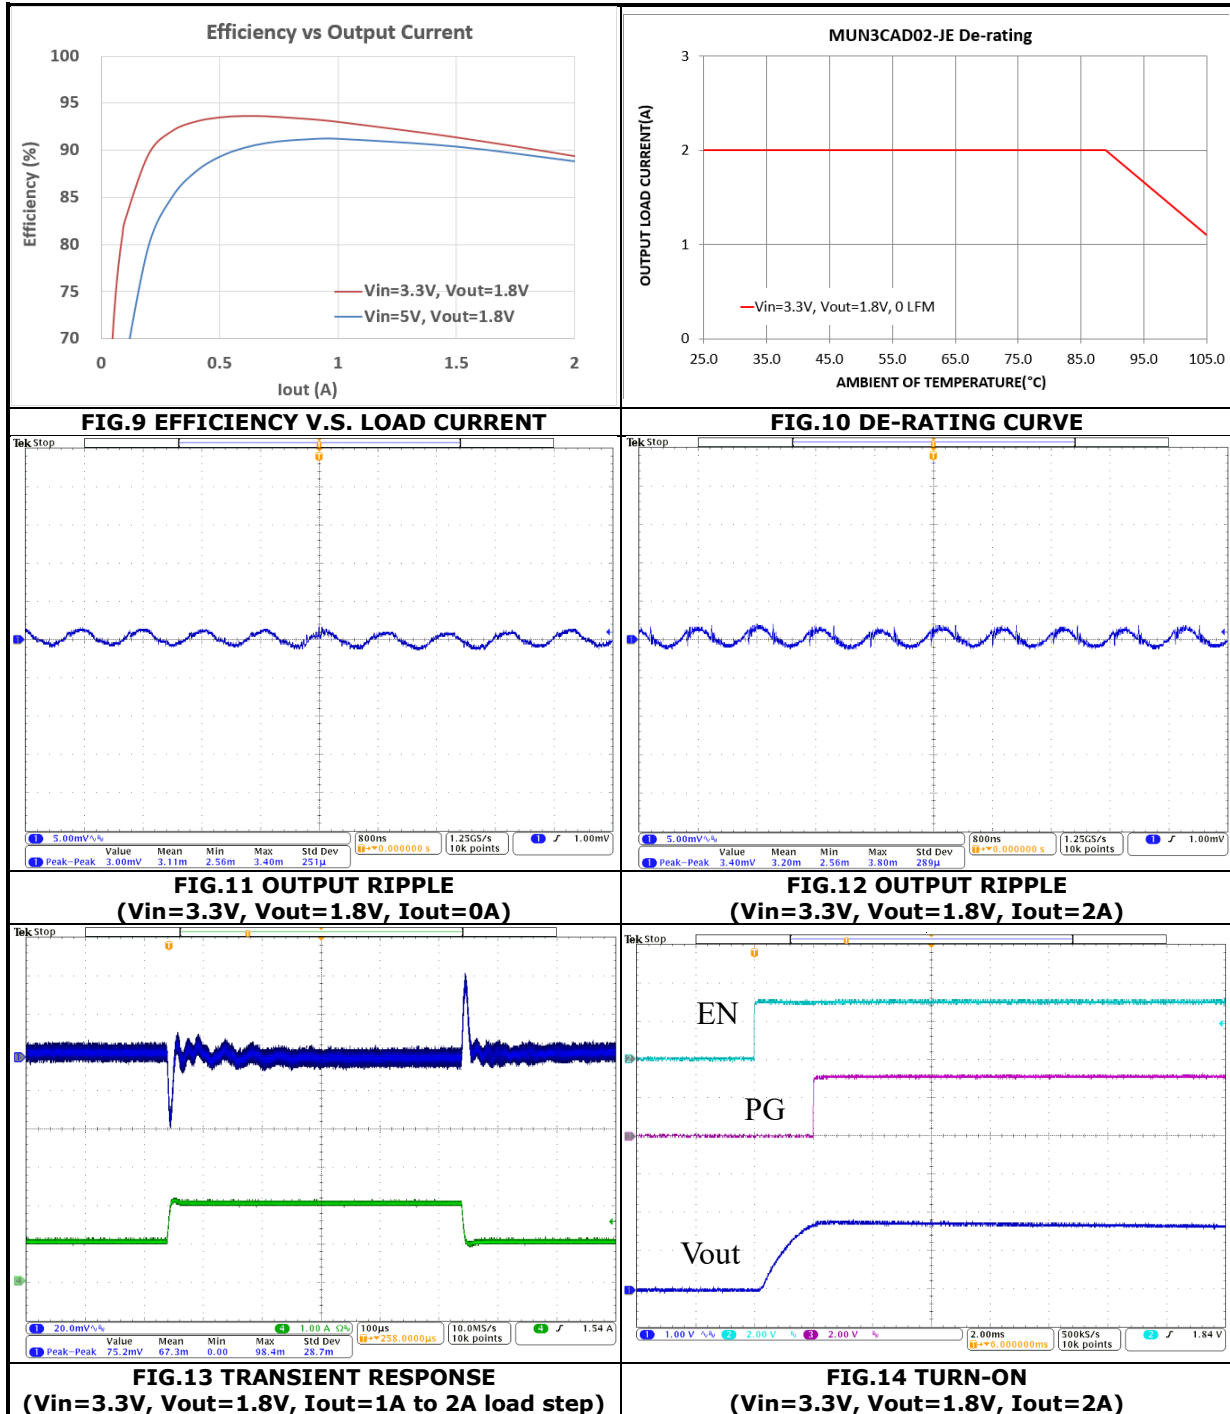

## TYPICAL PERFORMANCE CHARACTERISTICS:

Conditions:  $T_A = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified. Test Board Information: 30mm×30mm×1.6mm, 4 layers 2oz. The output ripple and transient response measurement is short loop probing and 20MHz bandwidth limited.  $C_{in} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $C_{out} = 22\mu\text{F}/6.3\text{V}/0805/\text{X7R}$ ,  $R_{FB\_top} = 100\text{k}\Omega$ ,  $C_{FB} = 100\text{pF}$ . The following figures provide the typical characteristic curves at 3.3Vout.

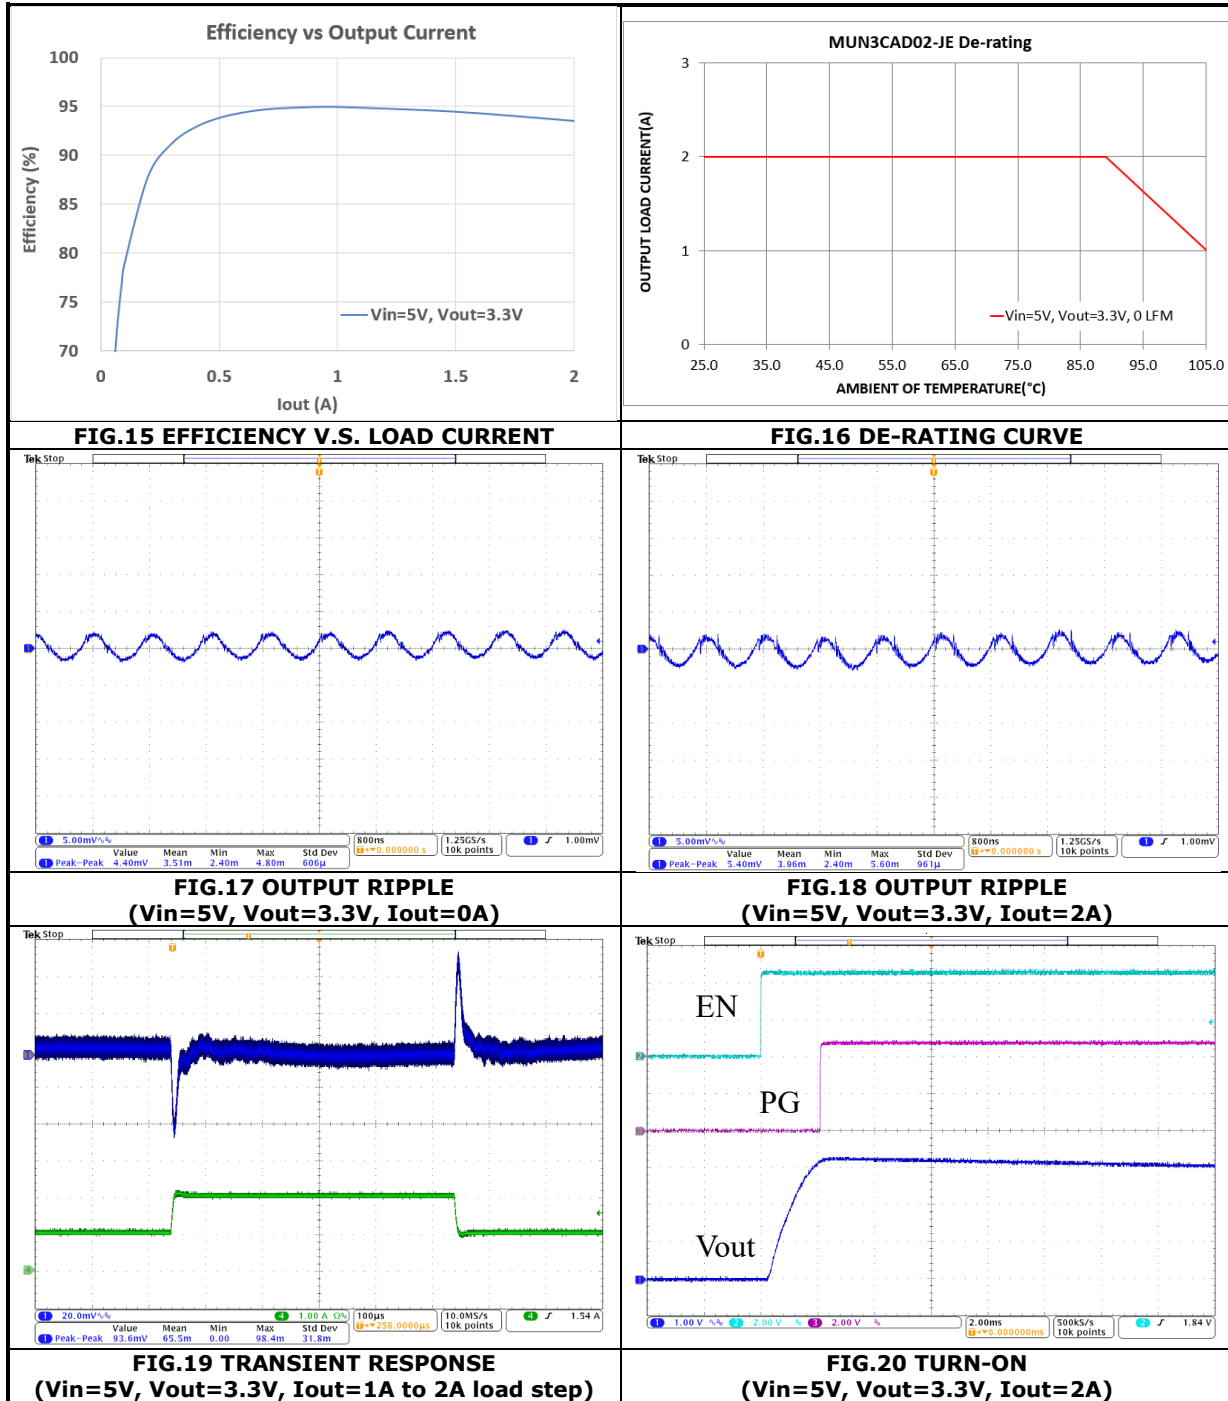



**APPLICATIONS INFORMATION:****SAFETY CONSIDERATIONS:**

Certain applications and/or safety agencies may require fuses at the inputs of power conversion components. Fuses should also be used when there is the possibility of sustained input voltage reversal which is not current limited. For greatest safety, we recommend a fast blow fuse installed in the ungrounded input supply line. The installer must observe all relevant safety standards and regulations. For safety agency approvals, install the converter in compliance with the end-user safety standard.

**INPUT FILTERING:**

The module should be connected to as low AC impedance source supply and a highly inductive source or line inductance can affect the stability of the module. Input capacitors must be placed directly to the input pin of the module, to minimize input ripple voltage and ensure module stability.

**OUTPUT FILTERING:**

To reduce output ripple and improve the dynamic response to as step load change, the additional capacitors at the output must be used. Low ESR ceramic, X5R or X7R capacitors are recommended to improve the output ripple and dynamic response of the module.

**PROGRAMMING OUTPUT VOLTAGE:**

The output voltage can be programmed by the dividing resistor RFB\_top (recommended 10k~200kohm) and RFB\_bot, Assume RFB\_top set 100 Kohm, the output voltage can be calculated as shown in Equation 1 and the resistance according to typical output voltage is shown in TABLE 1.

$$V_{OUT} (V) = 0.6 \times \left( 1 + \frac{R_{FB\_top}}{R_{FB\_bot}} \right) \quad (EQ.1)$$

| VOUT (V) | RFB_top (kΩ) | RFB_bot(kΩ) |
|----------|--------------|-------------|
| 1.0      | 100          | 150         |
| 1.2      | 100          | 100         |
| 1.8      | 100          | 50          |
| 2.5      | 100          | 31.58       |
| 3.3      | 100          | 22.22       |


**TABLE.1 RESISTOR VALUES FOR COMMON OUTPUT VOLTAGES**

**APPLICATIONS INFORMATION: (Cont.)****LOAD TRANSIENT RESPONSE INCREASE:**

In some applications, adding a ceramic cap (CFB) in parallel with RFB-top may further speed up the load transient responses, recommend capacitance 100pF~470pF.

**THERMAL CONSIDERATIONS:**


All of thermal testing condition is complied with JEDEC EIJ/JESD 51 Standards. Therefore, the test board size is 30mm×30mm×1.6mm with 4 layers 2oz. The case temperature of module sensing point is shown as FIG.21 Then  $R_{th}(jchoke-a)$  is measured with the component mounted on an effective thermal conductivity test board on 0 LFM condition. The module is designed for using when the case temperature is below 110°C regardless the change of output current, input/output voltage or ambient temperature.

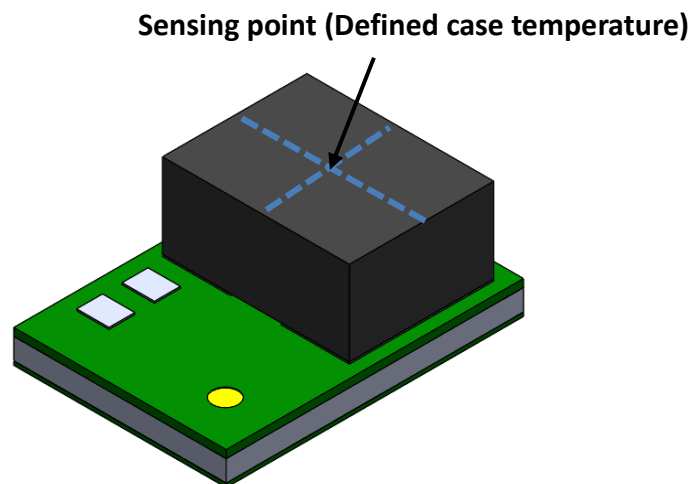

**FIG.21 CASE TEMPERATURE SENSING POINT**

**APPLICATIONS INFORMATION: (Cont.)**
**REFLOW PARAMETERS:**

Lead-free soldering process is a standard of electronic products production. Solder alloys like Sn/Ag, Sn/Ag/Cu and Sn/Ag/Bi are used extensively to replace the traditional Sn/Pb alloy. Sn/Ag/Cu alloy (SAC) is recommended for this power module process. In the SAC alloy series, SAC305 is a very popular solder alloy containing 3% Ag and 0.5% Cu and easy to obtain. Figure 22 shows an example of the reflow profile diagram. Typically, the profile has three stages. During the initial stage from room temperature to 150°C, the ramp rate of temperature should not be more than 3°C/sec. The soak zone then occurs from 150°C to 200°C and should last for 60 to 120 seconds. Finally, keep at over 217°C for 60~150 seconds to melt the solder and make the peak temperature at the range from 255°C to 260°C (Do not exceed 30 sec). It is noted that the time of peak temperature should depend on the mass of the PCB board. The reflow profile is usually supported by the solder vendor and one should adopt it for optimization according to various solder type and various manufacturers' formulae.

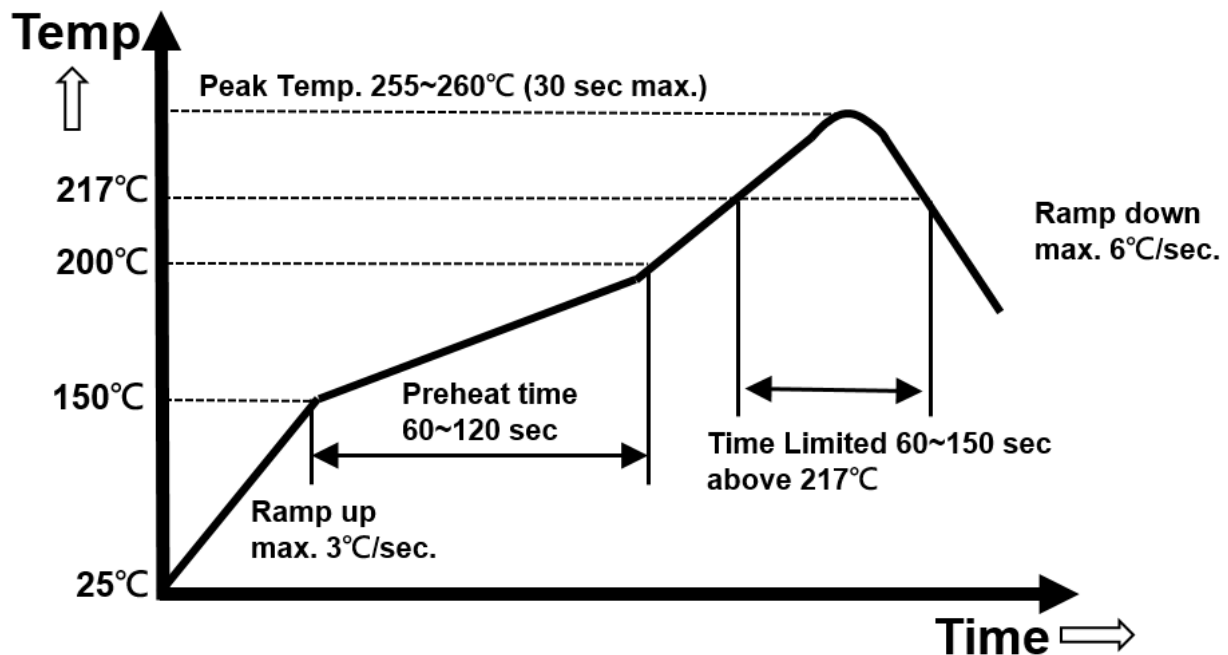

**FIG.22 RECOMMENDATION REFLOW PROFILE**  
(Not to scale)

**\*Refer to the Classification Reflow Profile of J-STD-020.**


Technical drawing of a rectangular object. The overall width is 2.5 and the overall height is 3.5. The drawing includes a front view with a circle and two small rectangles, and a side view with a larger rectangle. A dashed line indicates a fold or hinge.

[illegible]


Unit : mm  
General Tolerance:  $\pm 0.1\text{mm}$

## LAND PATTERN REFERENCE:

Unit: mm

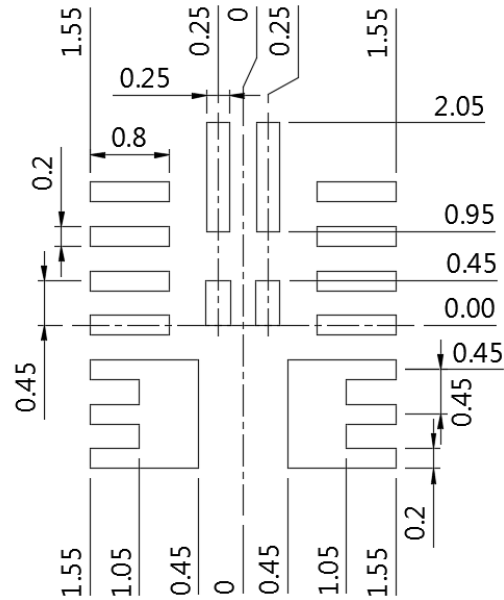

## RECOMMENDED LAND PATTERN

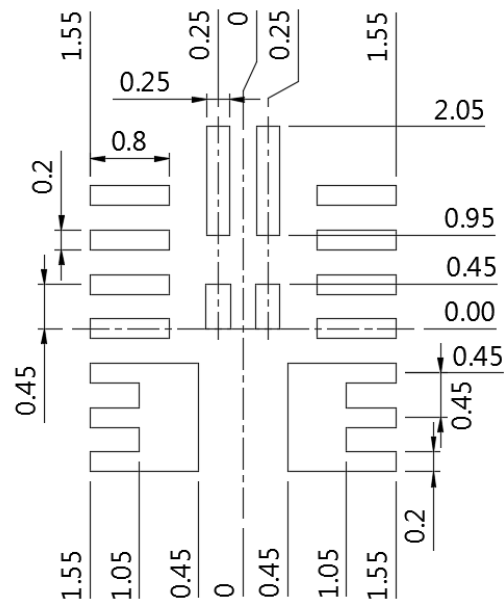



## RECOMMENDED STENCIL PATTERN

\*Based on 0.1~0.15mm thickness stencil (Reference only)

\*Recommended solder paste coverage 55~100%

**PACKING REFERENCE:**


Unit: mm

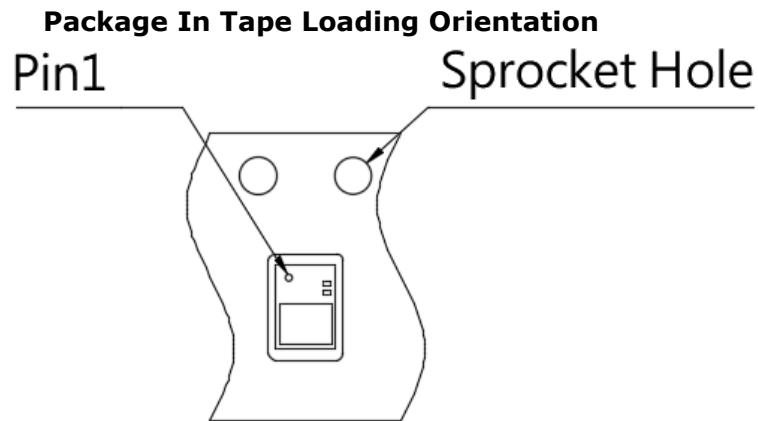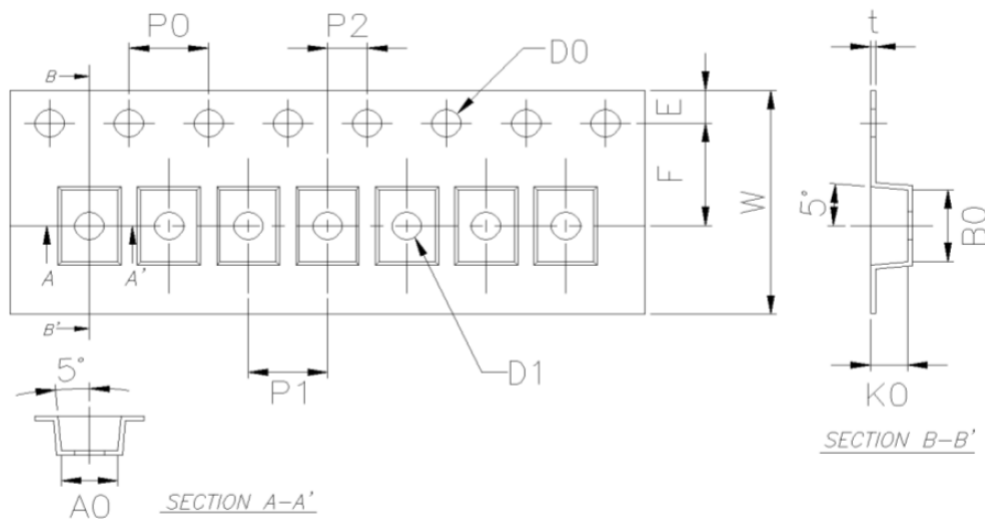
**Tape Dimension**


|    |                      |    |                 |
|----|----------------------|----|-----------------|
| A0 | $2.85 \pm 0.10$      | E  | $1.75 \pm 0.10$ |
| B0 | $3.85 \pm 0.10$      | K0 | $1.85 \pm 0.10$ |
| F  | $5.50 \pm 0.05$      | P0 | $4.00 \pm 0.10$ |
| W  | $12.00 \pm 0.30$     | P1 | $4.00 \pm 0.10$ |
| D0 | $\phi 1.55 \pm 0.05$ | P2 | $2.00 \pm 0.05$ |
| D1 | $\phi 1.50 \pm 0.10$ | t  | $0.25 \pm 0.05$ |


**PACKING REFERENCE: (Cont.)**

Unit: mm

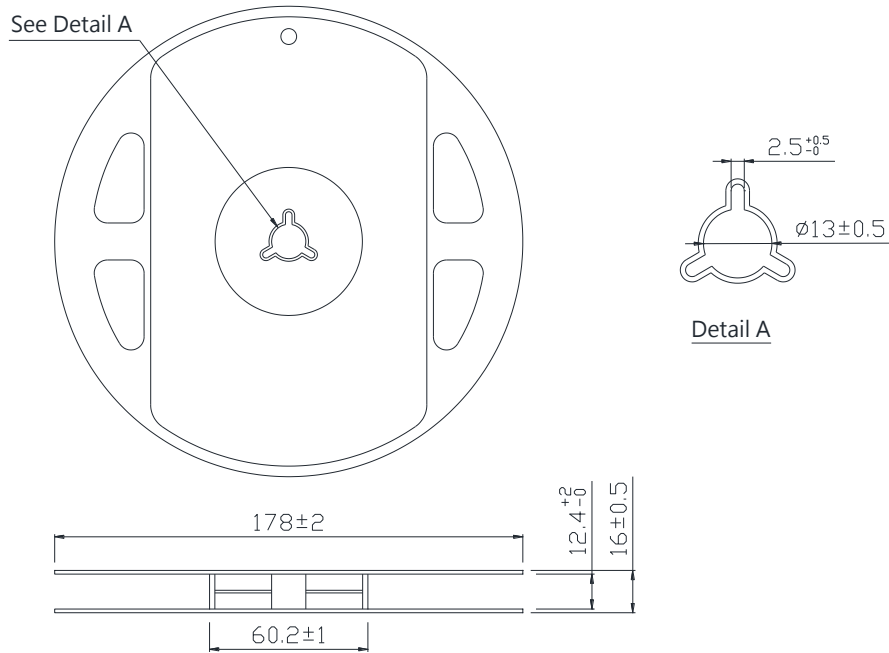**Reel Dimension**

**Peel Strength of Top Cover Tape**

The peel speed shall be about 300mm/min.

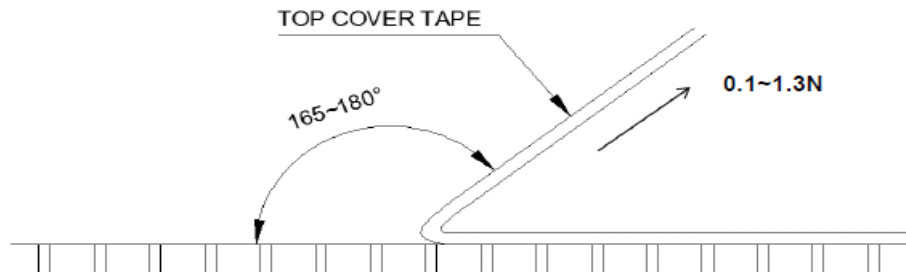The peel force of top cover tape is between 0.1N to 1.3N



**REVISION HISTORY:**

| <b>Date</b> | <b>Revision</b> | <b>Changes</b>                                                                                                         |
|-------------|-----------------|------------------------------------------------------------------------------------------------------------------------|
| 2021.01.04  | P00             | Release the preliminary specification.                                                                                 |
| 2021.04.12  | P01             | 1 、 Update Outline of Module.<br>2 、 Update package outline draw.                                                      |
| 2021.09.06  | P02             | Update the typical performance characteristics.                                                                        |
| 2021.11.11  | P03             | Modify the package outline.                                                                                            |
| 2022.03.07  | P04             | Update the electrical specifications.                                                                                  |
| 2022.05.11  | P05             | Update carrier tape dimension and quantity per reel to 2000 EA. Modify the reflow parameters.                          |
| 2022.12.23  | P06             | 1 、 Page 11, update reflow parameters.<br>2 、 Page 13, change the thickness description of stencil. Add note and unit. |
| 2024.12.16  | A1              | 1 、 Synchronized with document management number                                                                       |