


Current Transducer LA 25-P

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic separation between the primary circuit and the secondary circuit.



$$I_{PN} = 25 \text{ A}$$

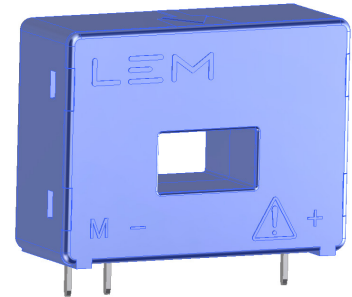

Electrical data

I_{PN}	Primary nominal RMS current	25	A
I_{PM}	Primary current, measuring range	0 ... ± 55	A
R_M	Measuring resistance	$T_A = 70^\circ\text{C}$ $T_A = 85^\circ\text{C}$ $R_{M \min}$ $R_{M \max}$ $R_{M \min}$ $R_{M \max}$	
	with $\pm 12 \text{ V}$ @ $\pm 25 \text{ A}_{\max}$	10 280	60 275 Ω
	@ $\pm 55 \text{ A}_{\max}$	10 80	60 75 Ω
	with $\pm 15 \text{ V}$ @ $\pm 25 \text{ A}_{\max}$	50 400	135 395 Ω
	@ $\pm 55 \text{ A}_{\max}$	50 140	135 135 Ω
I_{SN}	Secondary nominal RMS current	25	mA
N_P/N_S	Turns ratio	1 : 1000	
U_C	Supply voltage ($\pm 5\%$)	$\pm 12 \dots 15$	V
		Min Typ Max	
I_C	Current consumption @ $\pm 15 \text{ V}$	$8 + I_S$ $10 + I_S$ $12 + I_S$	mA

Accuracy - Dynamic performance data

ε	Error @ I_{PN} , $T_A = 25^\circ\text{C}$	@ $\pm 15 \text{ V}$ ($\pm 5\%$)	± 0.95	%
		@ $\pm 12 \dots 15 \text{ V}$ ($\pm 5\%$)	± 1.25	%
ε_L	Linearity error		< 0.15	%
		Typ Max		
I_{OE}	Electrical offset current @ $I_P = 0$, $T_A = 25^\circ\text{C}$		± 0.2	mA
I_{OM}	Magnetic offset current ¹⁾ @ $I_P = 0$ and specified R_M , after an overload of $3 \times I_{PN}$		± 0.3	mA
I_{OT}	Temperature variation of I_O	$0^\circ\text{C} \dots +70^\circ\text{C}$	± 0.1 ± 0.5	mA
		$-25^\circ\text{C} \dots +85^\circ\text{C}$	± 0.1 ± 0.6	mA
t_{D10}	Delay time to 10 % of the final output value for I_{PN} step		< 500	ns
t_{D90}	Delay time to 90 % of the final output value for I_{PN} step ²⁾		< 1	μs
BW	Frequency bandwidth (-1 dB)	DC ... 200		kHz

General data

T_A	Ambient operating temperature	$-25 \dots +85$	$^\circ\text{C}$
T_{Ast}	Ambient storage temperature	$-40 \dots +90$	$^\circ\text{C}$
R_S	Resistance of secondary winding	@ $T_A = 70^\circ\text{C}$	80 Ω
		@ $T_A = 85^\circ\text{C}$	85 Ω
m	Mass	16	g
	Standard	EN 50178: 1997	

Notes: ¹⁾ Result of the coercive field of the magnetic circuit

²⁾ For a $di/dt = 200 \text{ A/us}$.

Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulating plastic case recognized according to UL 94-V0.

Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

Application domain

- Industrial.

Current Transducer LA 25-P

Insulation coordination

U_d	RMS voltage for AC insulation test, 50 Hz, 1 min	3	kV
U_{Ni}	Impulse withstand voltage 1.2/50 μ s	5.7	kV
		Min	
d_{Cp}	Creepage distance	5	mm
d_{Cl}	Clearance	5	mm
CTI	Comparative tracking index (group I)	600	

Applications examples

According to **EN 50178** and **IEC 61010-1** standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
d_{Cp}, d_{Cl}, U_{Ni}	Rated insulation voltage	Nominal voltage
Basic insulation	500 V	500 V
Reinforced insulation	250 V	250 V

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

Dimensions LA 25-P (in mm)

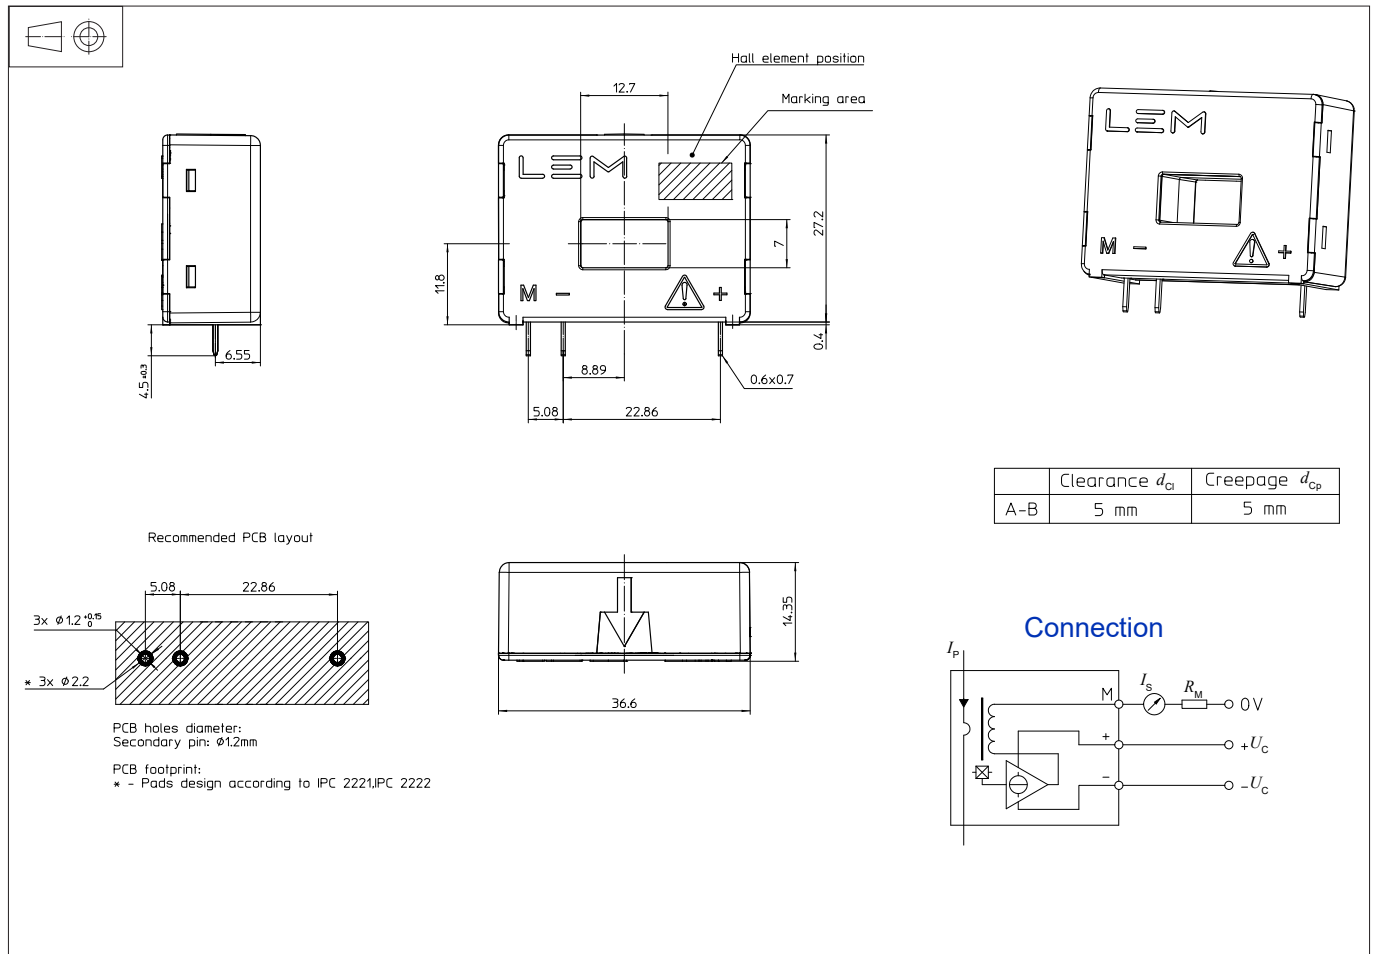

Mechanical characteristics

- General tolerance: ± 0.2 mm
- Primary through-hole: 12.7×7 mm
- Fastening & connection of secondary: 3 pins
- Recommended PCB hole: 0.6×0.7 mm
- Recommended PCB hole: $\phi 1.2$ mm

Remarks

- I_s is positive when I_p flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 90°C .
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: <https://www.lem.com/en/file/3137/download>.
- Dynamic performances (di/dt and delay time) are best with a single bar completely filling the primary hole.
- In order to achieve the best magnetic coupling, the primary windings have to be wound over the top edge of the device.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.