



M18-4 Stainless Steel 18 mm Barrel Sensors

Original Instructions

p/n: 188320 Rev. G

14-Apr-26

© Banner Engineering Corp. All rights reserved. www.bannerengineering.com

Contents

Chapter 1 Features	3
Models	3
Specifications	4
FCC Part 15 Class A for Unintentional Radiators	5
Industry Canada ICES-003(A)	5
Performance Curves	6
Dimensions	8
Chapter 2 Install the M18-4 Barrel Sensor	10
Wiring Diagrams	10
Chapter 3 Accessories	12
Cordsets	12
Washdown Cordsets	12
Apertures	13
Brackets	13
Reflectors	14
Chapter 4 Product Support and Maintenance	16
Repairs	16
Contact Us	16
Banner Engineering Corp Limited Warranty	16

Chapter Contents

Models 3
 Specifications 4

Chapter 1 Features

Next generation of self-contained DC-operated sensors



- Complete family of sensors, all housed in the popular 18 mm threaded metal barrel
- Chemically robust stainless steel sensors for wash-down applications
- Powerful and bright visible red emitter beam for easy alignment and set-up
- Highly visible output and dual-function power and stability indicators
- Advanced ASIC technology is resistant to optical and electrical noise source
- Wide operating temperature range: -40 °C to +70 °C (-40 °F to +158 °F)
- Robust 250° adjustment potentiometer on select models

WARNING:



- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

Models

Emitter/receiver models

Model Number		Range	Output
M18-4NAEL-2M	Emitter	25 m (82 ft)	None
M18-4NAEJ-2M		25 m (82 ft) with beam inhibit	
M18-4NAES-2M		25 m (82 ft) with adjustment	
M18-4VNRL-2M	Receiver	25 m (82 ft)	Complementary NPN
M18-4VPRL-2M			Complementary PNP
M18-4VNRS-2M		25 m (82 ft) with adjustment	Complementary NPN
M18-4VPRS-2M			Complementary PNP

Polarized retroreflective models

Model Number	Range	Output
M18-4VNLP-Q8	6 m (19.7 ft) with BRT-84 reflector	Complementary NPN
M18-4VPLP-2M		Complementary PNP
M18-4VNLPC-2M	6 m (19.7 ft) with BRT-84 reflector, with adjustment	Complementary NPN
M18-4VPLPC-2M		Complementary PNP

Retroreflective models

Model Number	Range	Output
M18-4VNLV-2M	7.5 m (24.6 ft) with BRT-84 reflector, with adjustment	Complementary NPN
M18-4VPLV-2M		Complementary PNP

Diffuse models

Model Number	Range	Output
M18-4VNDL-Q8	750 mm (29.5 in) with adjustment	Complementary NPN
M18-4VPDL-2M		Complementary PNP
M18-4VNDS-2M	300 mm (11.8 in) with adjustment	Complementary NPN
M18-4VPDS-2M		Complementary PNP

Fixed-field models

Model Number	Range	Output
M18-4VNFF30-2M	30 mm (1.2 in)	Complementary NPN
M18-4VPFF30-Q8		Complementary PNP
M18-4VNFF50-2M	50 mm (1.9 in)	Complementary NPN
M18-4VPFF50-Q8		Complementary PNP
M18-4VPFF75-2M	75 mm (2.9 in)	Complementary PNP
M18-4VNFF100-2M	100 mm (3.9 in)	Complementary NPN
M18-4VPFF100-Q8		Complementary PNP
M18-4VNFF150-2M	150 mm (5.9 in)	Complementary NPN
M18-4VPFF150-Q8		Complementary PNP
M18-4VNFF200-Q8	200 mm (7.8 in)	Complementary NPN
M18-4VPFF200-2M		Complementary PNP

Models ending in -2M are the 2 m (6.5 ft) unterminated cable models. Models ending in -Q8 have a 4-pin M12 quick disconnect integrated into the housing. If a model is listed ending in -Q8 in the model tables, the -2M option is no longer available for order.

- To order the 4-pin M12 integral quick disconnect model, add the suffix "Q8" to the model number. For example, M18-4VNDL-Q8.
- To order the 150 mm (6 in) PVC cable model with a 4-pin M12 quick disconnect, add the suffix "Q5" to the model number. For example, M18-4VPFF50-Q5. The -Q5 option now only applies to some of the fixed-field models. The other sensing mode models no longer have the -Q5 option available for order, but existing models are covered by the contents of this document.

All other models that fit into these model number patterns are no longer available for order, but are covered by the contents of this document.

Specifications

Supply Voltage

- 10 V to 30 V DC for ambient temperature $\leq 55\text{ }^{\circ}\text{C}$
- 10 V to 24 V DC for ambient temperature $> 55\text{ }^{\circ}\text{C}$

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Output Protection Circuitry

Protected against false pulse on power-up and continuous short circuit of outputs. Short-circuit protection at elevated temperatures may require a power cycle to reset.

Output Rating

- $\leq 50\text{ mA}$ total current for ambient temperatures $> 55\text{ }^{\circ}\text{C}$
- $\leq 100\text{ mA}$ total current through both outputs $\leq 55\text{ }^{\circ}\text{C}$
- OFF-State Leakage Current: $< 50\text{ }\mu\text{A}$ at 30 V DC
- ON-State Saturation Voltage: $< 1.5\text{ V}$ at 10 mA; $< 3.0\text{ V}$ at 100 mA

Supply Current (Exclusive of Load Current)

- Diffuse: 16 mA
- Opposed Mode Emitters: 17 mA
- Opposed Mode Receivers: 8 mA
- Retroreflective and Polarized Retroreflective: 16 mA
- Fixed-Field: 16 mA

Output Configuration

Complementary PNP or NPN by model number

Output Response Time

- Response is independent of signal strength
- Opposed mode: 1.5 milliseconds ON, 1.0 milliseconds OFF
- Retro, Polarized Retro, and Diffuse: 1.5 milliseconds ON, 0.75 milliseconds OFF
- Fixed-Field: 1.5 milliseconds ON, 1.0 milliseconds OFF
- Delay on Power-up: 100 milliseconds; outputs do not conduct during this time

Indicators

- Three LEDs (One green, two amber)
- Green solid: indicates power applied and sensor ready
- Green flashing: indicates marginal sensing signal
- Amber solid: indicates Pin 4 (black wire) output conducting

Emitter LED

Visible red

Repeatability

- Repeatability is independent of signal strength
- Opposed mode: 170 microseconds
- Retro, Polarized Retro, and Diffuse modes: 100 microseconds
- Fixed-Field mode: 100 microseconds

Construction

- Housing: 316L stainless steel
- Front window: PMMA
- Indicator windows: Clear polysulfone (PSU)
- Indicator cover and gain pot driver: Black PSU
- Cable: PVC jacket
- Pigtail QD: 316L stainless steel and PVC jacket
- QD connector and mounting nuts: 316L stainless steel

Adjustments

- Diffuse (DL, DS), Emitter (ES), Receiver (RS), Polarized Retroreflective (LPC), Retroreflective (LV) models: Single turn sensitivity (gain) adjustment potentiometer
- Emitter Beam Inhibit (EJ) models: Tie black wire to 10 V to 30 V dc for beam inhibit

Operating Conditions

- 40 °C to +70 °C (-40 °F to +158 °F)
- 95% at +50 °C maximum relative humidity (non-condensing)

FCC Part 15 Class A for Unintentional Radiators

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

(Part 15.21) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Industry Canada ICES-003(A)

This device complies with CAN ICES-3 (A)/NMB-3(A). Operation is subject to the following two conditions: 1) This device may not cause harmful interference; and 2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la norme NMB-3(A). Le fonctionnement est soumis aux deux conditions suivantes : (1) ce dispositif ne peut pas occasionner d'interférences, et (2) il doit tolérer toute interférence, y compris celles susceptibles de provoquer un fonctionnement non souhaité du dispositif.


Environmental Rating


IEC 60529 IP67, IP68, and IP69K


Vibration and Mechanical Shock


All models meet Mil. Std. 202F requirements. Method 201A (Vibration; frequency 10 to 60 Hz, max., double amplitude 0.06 in acceleration 10G). Method 213B conditions H&I (Shock: 75G with unit operating; 100G for non-operation)

Certifications


 Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM

 Turck Banner LTD Blenheim House
Blenheim Court
Wickford, Essex SS11 8YT
GREAT BRITAIN

 Industrial Control Equipment
LISTED 3T.JJ Class 2 power ; UL Environmental Rating: Type 1

 Chemical Compatibility Certified.
ECOLAB is a registered trademark of Ecolab USA Inc. All rights reserved.

Required Overcurrent Protection



WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.


For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	2.0	30	0.5


Performance Curves

Diffuse and **fixed-field** mode sensor performance is based on the use of a 90% reflectance white test card.


Diffuse models (300 mm range)

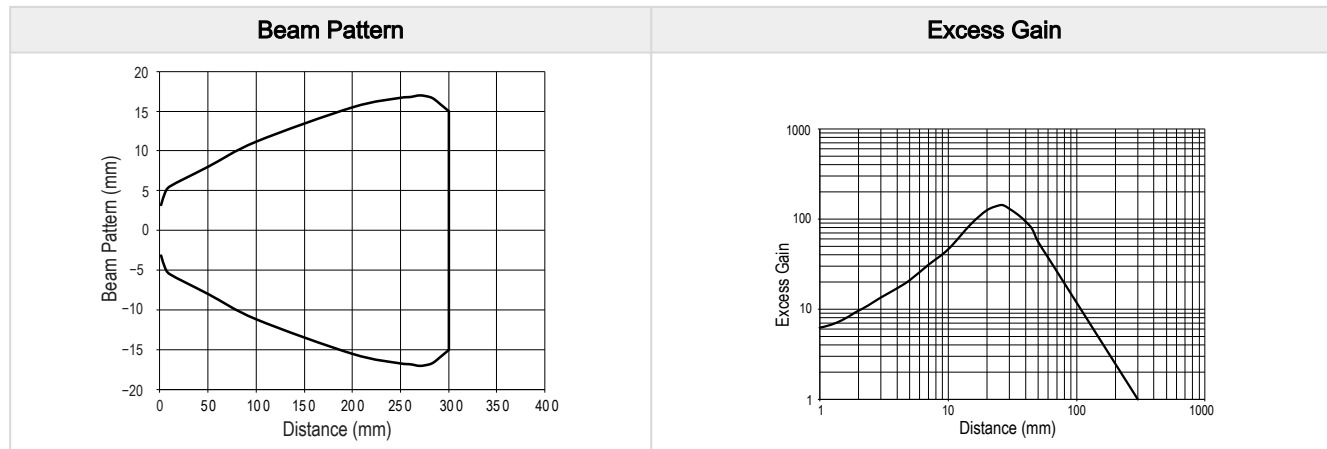


Diffuse models (750 mm range)

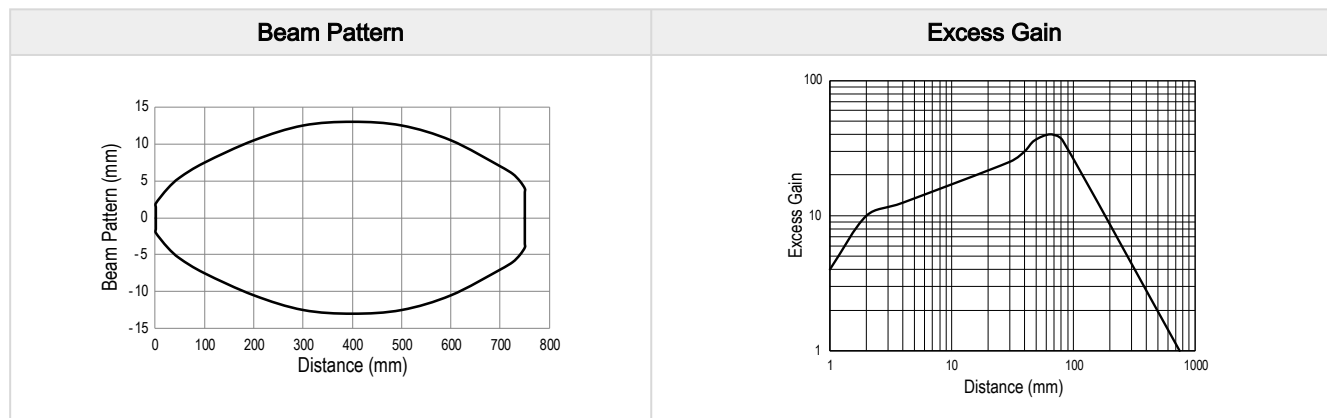


Emitter/receiver models (effective beam size: 15.2 mm)

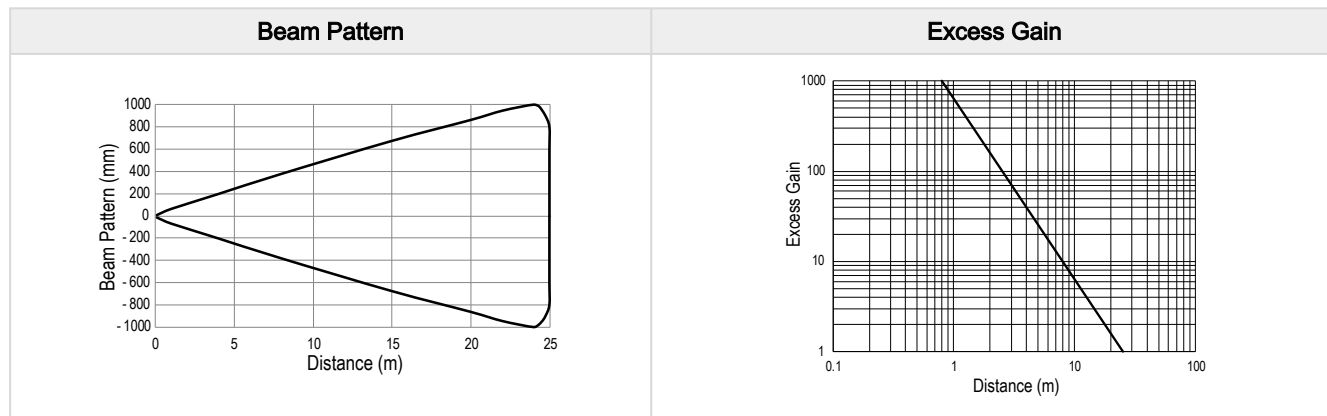


Polarized retroreflective models

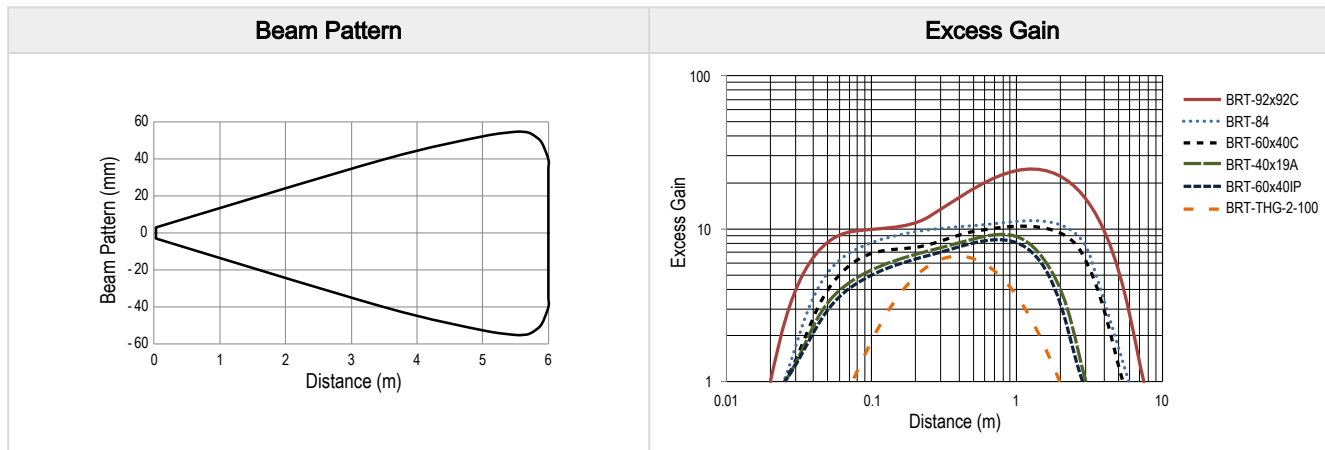

Retroreflective models

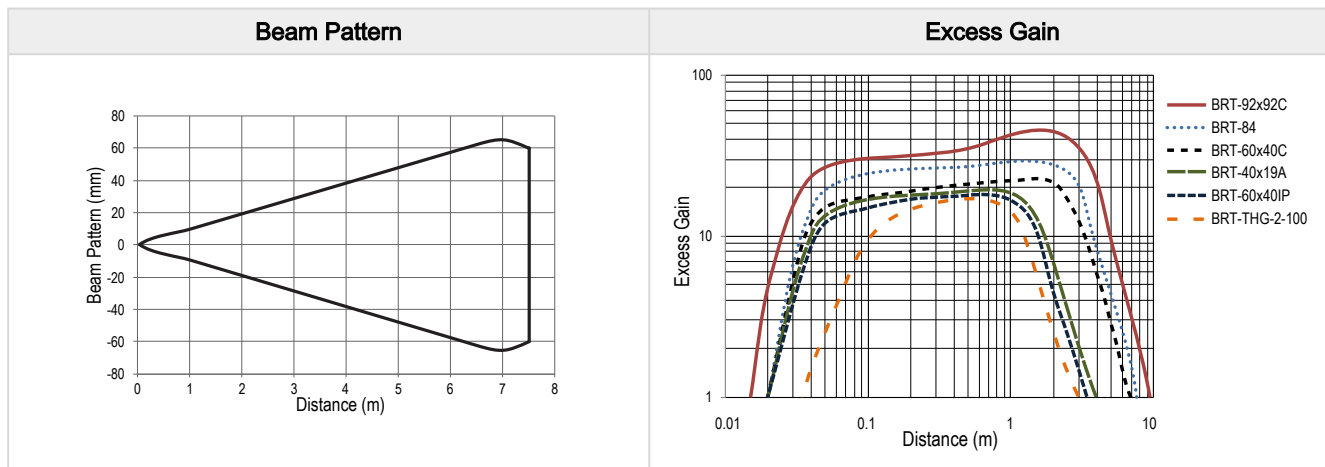


Fixed-field models

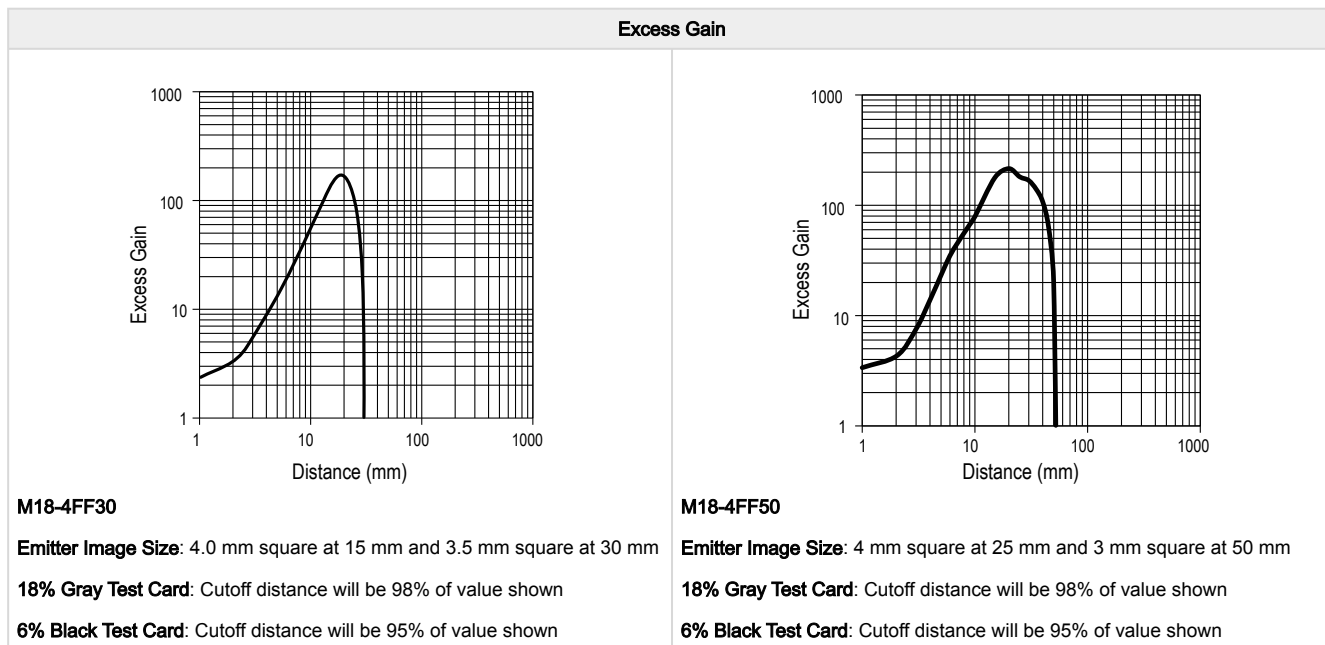

Continued on page 8

Continued from page 7

Excess Gain

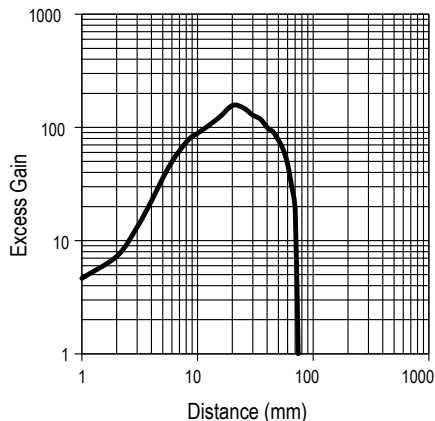


M18-4FF75

Emitter Image Size: 4.5 mm square at 37 mm and 4.0 mm square at 75 mm

18% Gray Test Card: Cutoff distance will be 98% of value shown

6% Black Test Card: Cutoff distance will be 95% of value shown

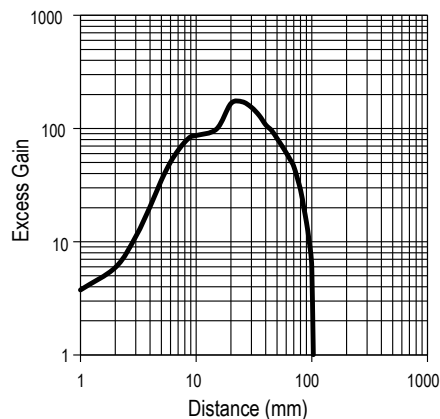


M18-4FF100

Emitter Image Size: 4.5 mm square at 50 mm and 4.5 mm square at 100 mm

18% Gray Test Card: Cutoff distance will be 95% of value shown

6% Black Test Card: Cutoff distance will be 90% of value shown

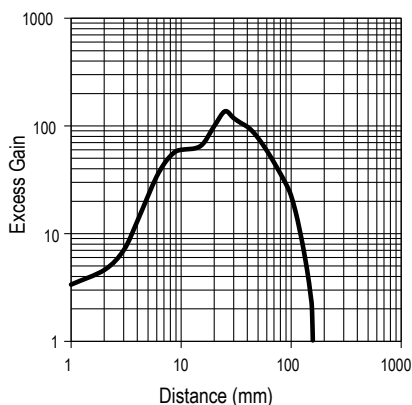


M18-4FF150

Emitter Image Size: 5 mm square at 75 mm and 8 mm square at 150 mm

18% Gray Test Card: Cutoff distance will be 90% of value shown

6% Black Test Card: Cutoff distance will be 70% of value shown

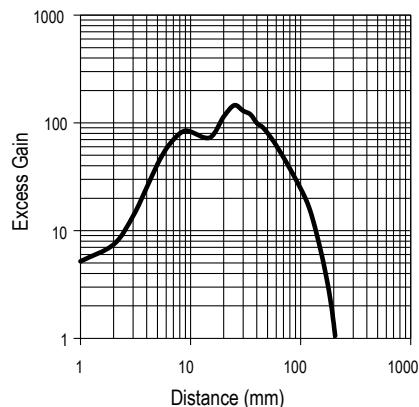

M18-4FF200

Emitter Image Size: 5 mm square at 100 mm and 8 mm square at 200 mm


18% Gray Test Card: Cutoff distance will be 85% of value shown

6% Black Test Card: Cutoff distance will be 60% of value shown


Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

Cable Models

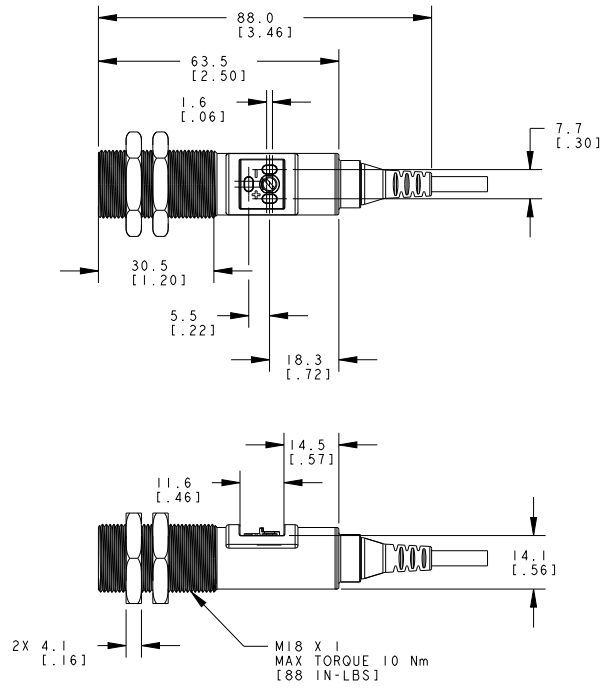


QD Models

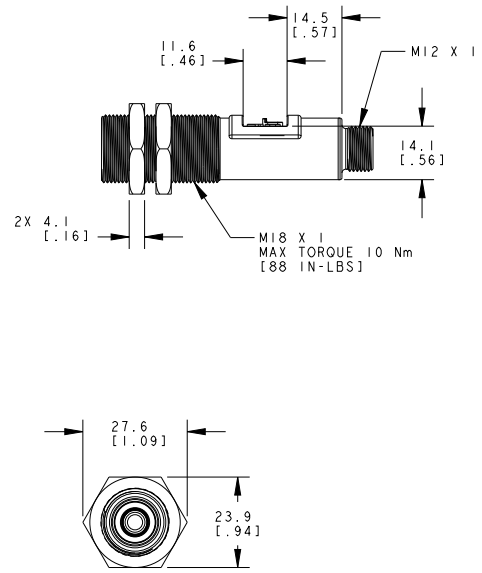

Chapter 2 Install the M18-4 Barrel Sensor




M18-4 Features and Installation

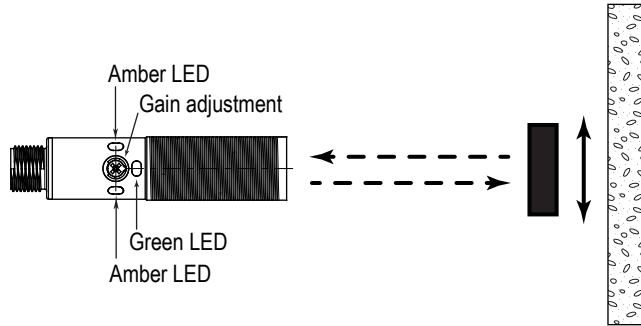

To install the M18-4 Barrel Sensor:

1. Align the sensor as required for the application. For the most sensitive object detection, align the sensor so that the objects move across the sensor's axis.
2. Secure the sensor to a bracket.
3. Wire sensor as shown in the wiring diagrams.
4. Adjust the gain adjuster (sensitivity pot) if necessary.

Wiring Diagrams

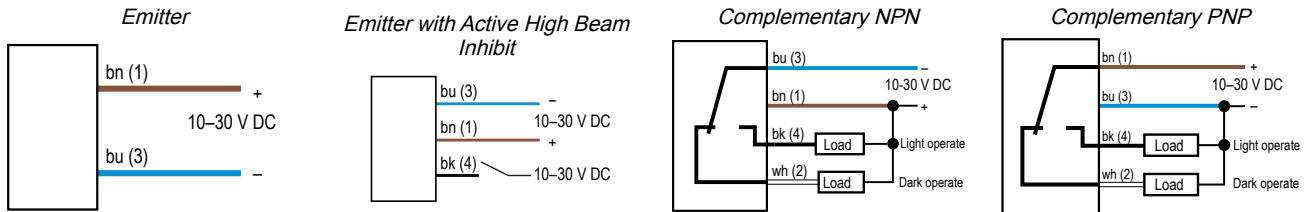

Key

1. Brown
2. White
3. Blue
4. Black

NOTE: Open lead wires must be connected to a terminal block.

In light operate (LO) mode, the output is ON when the target returns the same or more light to the sensor and OFF when the sensor detects less light than the configured/taught target. In **opposed and retroreflective sensing modes**, light operate is active when the beam is unblocked. In **diffuse, fixed field, and adjustable field sensor modes**, light operate is active when the target is present.

In dark operate (DO) mode, the output is ON when the target returns less light to the sensor than the configured target and OFF when the sensor detects more light than the configured/taught target. In **opposed and retroreflective sensing modes**,

dark operate is active when the beam is blocked. In **diffuse, fixed field, and adjustable field sensor modes**, dark operate is active when the target is absent.

Chapter Contents

Cordsets 12
 Washdown Cordsets 12
 Apertures 13
 Brackets 13
 Reflectors 14

Chapter 3 Accessories

Cordsets




All measurements are listed in millimeters, unless noted otherwise. The measurements provided are subject to change.

4-Pin Single-Ended M12 Female Cordsets				
Model	Length	Style	Dimensions	Pinout (Female)
MQDC-406	2 m (6.56 ft)	Straight		
MQDC-415	5 m (16.4 ft)			
MQDC-430	9 m (29.5 ft)			
MQDC-450	15 m (49.2 ft)	Right-Angle		
MQDC-406RA	2 m (6.56 ft)			
MQDC-415RA	5 m (16.4 ft)			
MQDC-430RA	9 m (29.5 ft)			
MQDC-450RA	15 m (49.2 ft)			<p>1 = Brown 2 = White 3 = Blue 4 = Black 5 = Not used</p>

Washdown Cordsets

4-Pin Single-Ended M12 Female Washdown, Stainless Steel Cordsets				
Model	Length	Style	Dimensions	Pinout (Female)
MQDC-WDSS-0406	2 m (6.56 ft)	Straight		
MQDC-WDSS-0415	5 m (16.4 ft)			
MQDC-WDSS-0430	9 m (29.5 ft)			
				<p>1 = Brown 2 = White 3 = Blue 4 = Black</p>

Apertures


Model	Units	Aperture Description	Product
AP18SCN	3	Kit includes black acetal round apertures of 0.5 mm (0.02 in), 1.0 mm (0.04 in), and 2.5 mm (0.10 in) diameter.	
AP18SRN	3	Kit includes black acetal rectangular apertures of 0.5 mm (0.02 in), 1.0 mm (0.04 in), and 2.5 mm (0.10 in) wide. Each kit also includes a thread-on housing, Teflon® FEP® lens, and o-ring.	
APG18S	1	Kit with glass lens to protect plastic sensor lens from chemical environments and weld splatter damage.	

Brackets

SMB18SF


- 18 mm swivel bracket with M18 × 1 internal thread
- Black thermoplastic polyester
- Stainless steel swivel locking hardware included
- CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)

Hole center spacing: A = 36.0
Hole size: A = \varnothing 5.3, B = \varnothing 18.0



SMBS18-2-1


- 30% glass-filled PBT
- CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)



SMB18A

- Right-angle mounting bracket with a curved slot for versatile orientation
- 12-ga. stainless steel
- 18 mm sensor mounting hole
- Clearance for M4 (#8) hardware
- CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)

Hole center spacing: A to B = 24.2
Hole size: A = \varnothing 4.6, B = 17.0 × 4.6, C = \varnothing 18.5



SMB18FA..

- Swivel bracket with tilt and pan movement for precision adjustment
- Easy sensor mounting to extruded rail T-slots
- Metric and inch size bolts available
- 18 mm sensor mounting hole

Hole size: B=∅ 18.1

Bolt Thread (A):

SMB18FA = 3/8 - 16 × 2 in


CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)

SMB18FAM10 = M10 - 1.5 × 50

CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)

SMB18FAM12 = n/a; no bolt included. Mounts directly to 12 mm (½ in) rods

CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)



For additional brackets, check the current Banner catalog or visit www.bannerengineering.com. All measurements are listed in millimeters, unless noted otherwise. The measurements provided are subject to change.

Reflectors

BRT-2X2

- Square, acrylic target
- Reflectivity factor: 1.0
- Maximum temperature: +50 °C (+122 °F)
- Optional brackets are available
- Reflector size: 51 mm × 51 mm
- Approximate size: 51.3 mm × 61 mm
- Two 4.2 mm diameter slots for mounting
- CAD files: [DXF](#), [PDF](#), [IGS](#), [STP](#)

BRT-2X2-25 Qty 25

BRT-2X2-100 Qty 100


**BRT-84X84A**


- Square, acrylic target
- Reflectivity Factor: 2.0
- Temperature: -20 °C to +60 °C (-4 °F to +140 °F)
- Approximate size: 84 mm × 84 mm × 9 mm
- Two 4.2 mm diameter slots for mounting
- CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)

**BRT-40X19A**

- Rectangular, acrylic target
- Reflectivity Factor: 1.3
- Temperature: -20 °C to +60 °C (-4 °F to +140 °F)
- Reflector size: 18 mm × 40 mm
- Approximate size: 18 mm × 60 mm × 7.3 mm
- Two 4 mm diameter mounting holes, 50 mm centers
- CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)



<p>BRT-60X40C and BRT-60X40CM (Microprism)</p> <ul style="list-style-type: none"> • Rectangular, acrylic target • Reflectivity Factor: 1.4 • Temperature: -20 °C to +60 °C (-4 °F to +140 °F) • Optional brackets are available • Approximate size: 40 mm × 60 mm • BRT-60X40C CAD Files: DXF, PDF, IGS, STP • BRT-60X40CM CAD Files: DXF, PDF, IGS, STP 	
--	---

<p>BRT-84</p> <ul style="list-style-type: none"> • Round, acrylic target • Reflectivity Factor: 1.4 • Temperature: -20 °C to +60 °C (-4 °F to +140 °F) • Optional brackets are available • Size: 84 mm diameter • Mounting Hole: 4.5 mm diameter • CAD files: DXF, PDF, IGS, STP 	
--	---

Retroreflective Tape

Model	Reflectivity Factor	Maximum Temperature	Size
BRT-THG-2-100	0.7	+60 °C (+140 °F)	50 mm (2 in) wide, 2.5 m (100 in) long

Chapter Contents

Repairs	16
Contact Us	16
Banner Engineering Corp Limited Warranty	16

Chapter 4 Product Support and Maintenance

Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

IMPORTANT: If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

Contact Us

Banner Engineering Corp. | 9714 Tenth Avenue North | Plymouth, MN 55441, USA | Phone: + 1 888 373 6767

For worldwide locations and local representatives, visit www.bannerengineering.com.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

