

EMC/RFI Filter for PV Inverters



- Reduces conducted emissions towards the solar panel
- Reduces the probability of EMI radiation off the solar panel
- Helps to prevent pre-mature panel aging because of HF leakage currents
- Helps to meet international EMC regulations for the entire PV system
- Most compact standard solution in the industry, optionally available without capacitors to ground (B types)
- New: up to 2300 A



Performance indicators

Attenuation performance



Rated current [A]



Approvals & Compliances



(cURus:600 VDC) (ENEC14: 600 VDC)

FN2200 are very compact DC filters for PV inverters and therefore support the integration in shrinking frame sizes of power electronics. All FN2200 come in unsymmetrical housings, which help to prevent inverse installation and wrong electrical connection. Along with grid-side installed AC EMC/RFI filters, FN2200 are key to meet the international EMC standards like EN 61000-6-3 and -6-4 and help to ensure reliable operation of the system. FN2200 are designed for very low power loss, to support overall efficiency.

Features and Benefits

Installed between the PV inverter and the solar panel, FN2200 DC filters help to control conducted emissions on the panel side of the system and therefore reduce the potential for interference radiation off the panel. The filter also protects the solar panel from HF stray and leakage currents which can cause pre-mature aging in the PV modules.



























Typical Applications

FN 2200 are primarily designed for PV inverters. However, they can potentially also be used in other DC applications within published specifications, like UPS, DC motor drives, or DC quick chargers.

Technical Specifications

| | |
|--|--|
| Maximum continuous operating voltage | 1200 VDC 300 VAC |
| Rated currents | 25 to 2300 A @ 55°C |
| Overload capability | 4x rated current at switch on, 1.5x rated current for 1 minute, once per hour |
| Operating frequency | DC 50/60 Hz |
| High potential test voltage | P → E 3600 VDC for 2 sec P → P 3000 VDC for 2 sec |
| Temperature range (operation and storage) | -40°C to +100°C (40/100/21) |
| Protection category | IP 20 (25 to 150 A types) IP 00 (250 to 2300 A types) |
| Flammability corresponding to | UL 94 V-0 |
| Design corresponding to | UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939 |
| MTBF (Mil-HB-217F) | >223,000 h @ 55°C/1200 V |

Filter Selection Table

| Filter | Buy | Rated current | Typical inverter | Filter efficiency | Power loss | Input/Output connections | | Weight |
|-----------------|---|---------------|------------------|-------------------|------------|---|---|--------|
| | | @ 55°C (40°C) | AC power rating* | @ 25°C/DC | @ 25°C/DC |  |  | [kg] |
| | | [A] | [kW] | [%] | [W] | | | |
| FN2200-25-33 |  | 25 (28) | 10 | > 99.9 | 8 | -33 | | 0.9 |
| FN2200-50-34 |  | 50 (57) | 20 | > 99.9 | 17 | -34 | | 1.6 |
| FN2200-75-34 |  | 75 (86) | 30 | > 99.9 | 18 | -34 | | 1.7 |
| FN2200-100-35 |  | 100 (115) | 40 | > 99.9 | 22 | -35 | | 2.7 |
| FN2200-150-40 |  | 150 (173) | 60 | > 99.9 | 31 | -40 | | 4.9 |
| FN2200-250-99 |  | 250 (288) | 100 | > 99.9 | 10 | | -99 | 5.0 |
| FN2200-400-99 |  | 400 (460) | 150 | > 99.9 | 16 | | -99 | 6.1 |
| FN2200-600-99 |  | 600 (690) | 250 | > 99.9 | 29 | | -99 | 6.5 |
| FN2200-800-99 |  | 800 (920) | 350 | > 99.9 | 26 | | -99 | 9.3 |
| FN2200-1000-99 |  | 1000 (1150) | 400 | > 99.9 | 40 | | -99 | 9.4 |
| FN2200-1500-99 |  | 1500 (1600) | 500 | > 99.9 | 45 | | -99 | 14.6 |
| FN2200-2300-99 |  | 2300 (2500) | 800/1000 | > 99.9 | 84 | | -99 | 25.0 |
| | | | | | | | | |
| FN2200B-25-33 |  | 25 (28) | 10 | > 99.9 | 8 | -33 | | 0.9 |
| FN2200B-50-34 |  | 50 (57) | 20 | > 99.9 | 17 | -34 | | 1.6 |
| FN2200B-75-34 |  | 75 (86) | 30 | > 99.9 | 18 | -34 | | 1.7 |
| FN2200B-100-35 |  | 100 (115) | 40 | > 99.9 | 22 | -35 | | 2.7 |
| FN2200B-150-40 |  | 150 (173) | 60 | > 99.9 | 31 | -40 | | 4.9 |
| FN2200B-250-99 |  | 250 (288) | 100 | > 99.9 | 10 | | -99 | 5.0 |
| FN2200B-400-99 |  | 400 (460) | 150 | > 99.9 | 16 | | -99 | 6.1 |
| FN2200B-600-99 |  | 600 (690) | 250 | > 99.9 | 29 | | -99 | 6.5 |
| FN2200B-800-99 |  | 800 (920) | 350 | > 99.9 | 26 | | -99 | 9.3 |
| FN2200B-1000-99 |  | 1000 (1150) | 400 | > 99.9 | 40 | | -99 | 9.4 |
| FN2200B-1500-99 |  | 1500 (1600) | 500 | > 99.9 | 45 | | -99 | 14.6 |
| FN2200B-2300-99 |  | 2300 (2500) | 800/1000 | > 99.9 | 84 | | -99 | 25.0 |

* Based on rated DC current of typical 3-phase PV inverters with 900 VDC input. Note: depending upon manufacturer and model, DC currents for a given PV inverter power can differ significantly. Filters with higher current ratings for large central inverters up to the MW range are available upon request.

Distribution Inventory

Up-to-date inventory levels for global distributors is available at <https://products.schaffner.com/stock>



Typical Filter Attenuation





Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym; C=0.1 Ω/100 Ω sym; D=100 Ω/0.1 Ω sym

25 to 75 A types


100 to 150 A types

250 A types

400 to 2300 A types

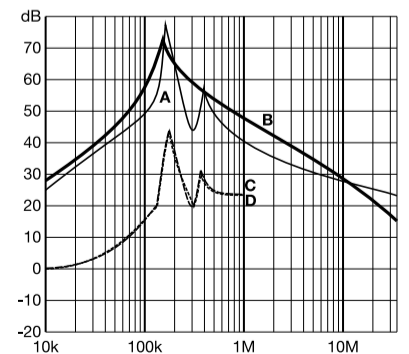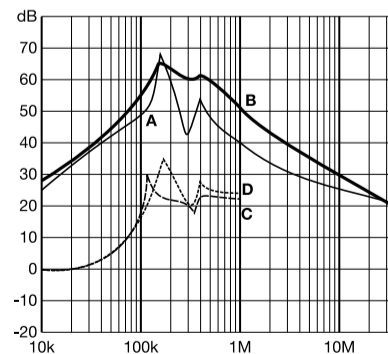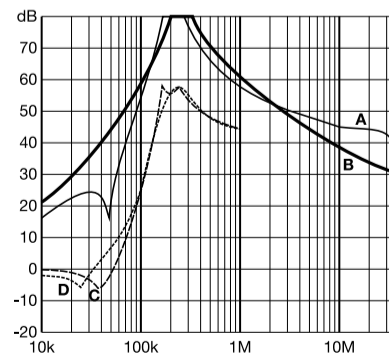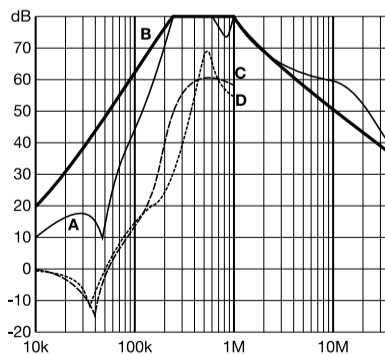

Typical Block Schematic



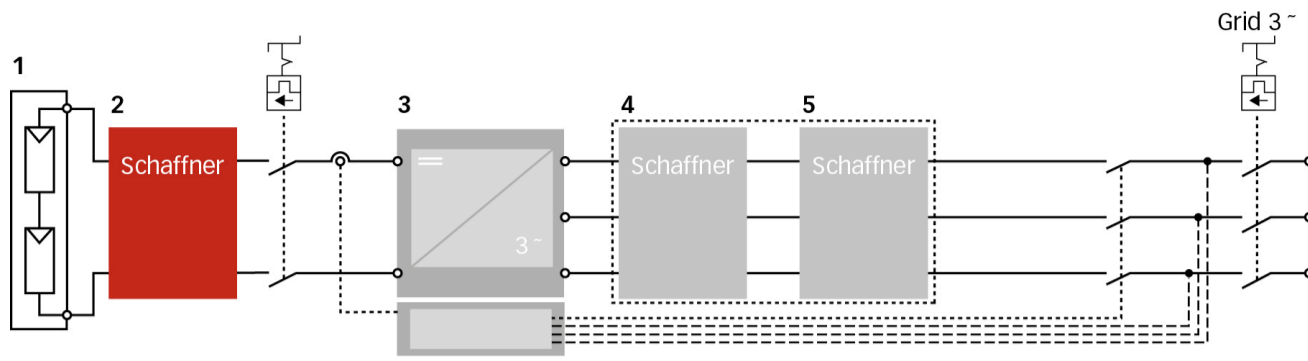


1 PV modules
2 Schaffner FN 2200

3 Central Inverter
4 Schaffner magnetic components


5 Schaffner AC EMC/EMI filter

Mechanical Data

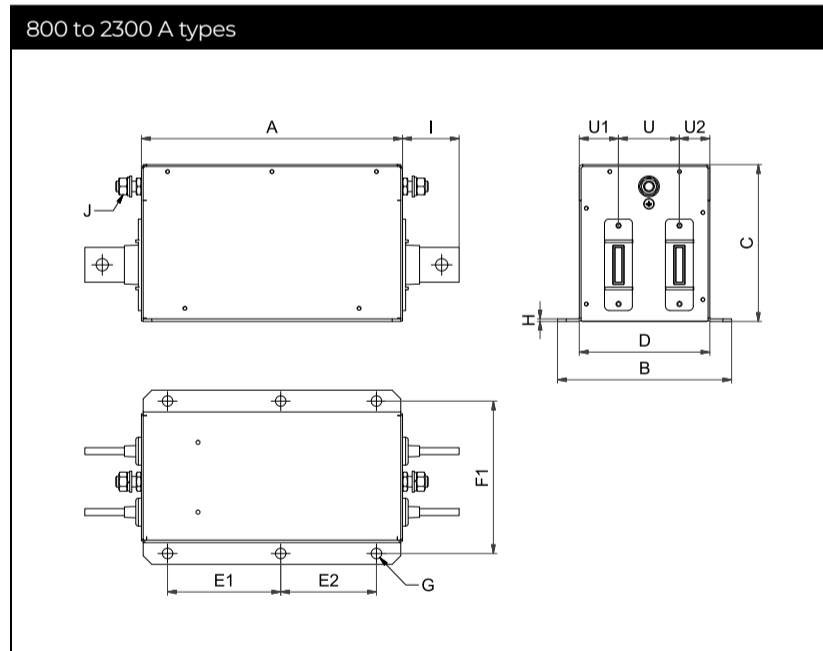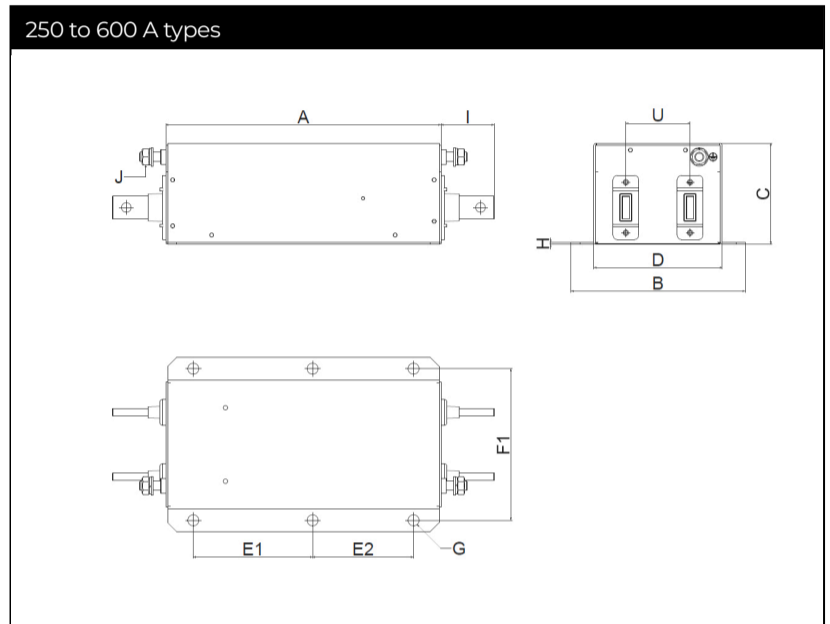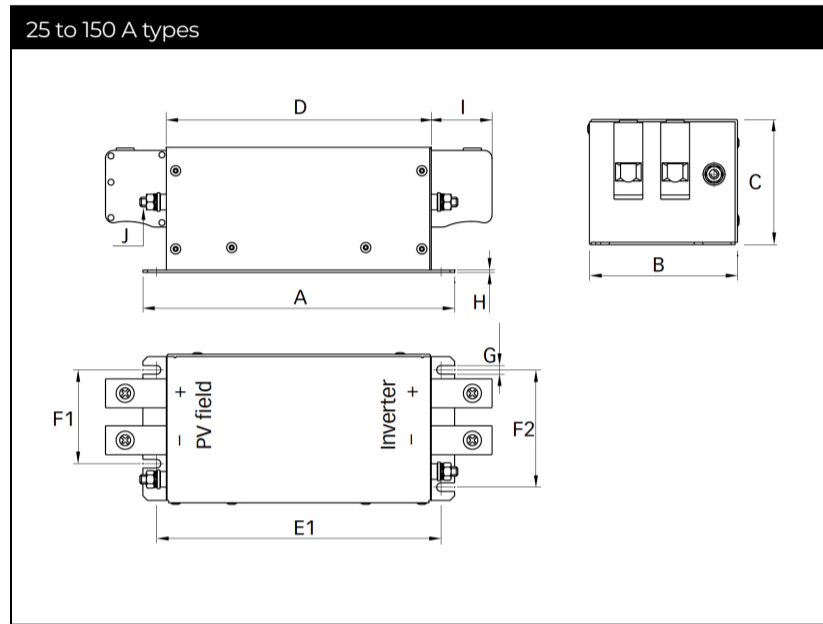

Note: all FN 2200 provide unsymmetrical mounting hole patterns to prevent inverse filter installation in the field. (Dimensions E1 E2 and F1/F2)

Busbar Connections

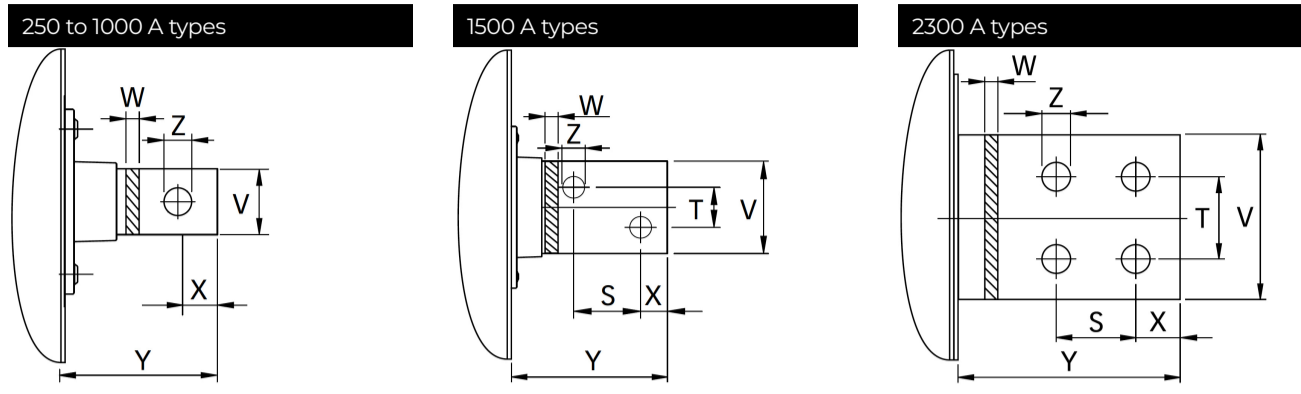

Dimensions

| | 25 A | 50 A | 75 A | 100 A | 150 A | 250 A | 400 A | 600 A | 800 A | 1000 A | 1500 A | 2300 A |
|-----------|-------|-------|-------|-------|-------|-------|--------|--------|-------|--------|--------|--------|
| A | 170 | 200 | 200 | 220 | 250 | 300 | 300 | 300 | 300 | 300 | 300 | 400 |
| B | 80 | 95 | 95 | 125 | 140 | 180 | 190 | 190 | 200 | 200 | 200 | 250 |
| C | 65 | 80 | 80 | 95 | 115 | 110 | 110 | 110 | 140 | 140 | 150 | 180 |
| D | 140 | 170 | 170 | 190 | 220 | 130 | 140 | 140 | 150 | 150 | 150 | 195 |
| E1 | 152.5 | 182.5 | 182.5 | 202.5 | 232.5 | 130 | 130 | 130 | 130 | 130 | 130 | 190 |
| E2 | | | | | | 110 | 110 | 110 | 110 | 110 | 110 | 150 |
| F1 | 45 | 60 | 60 | 80 | 100 | 155 | 165 | 165 | 175 | 175 | 175 | 225 |
| F2 | 60 | 75 | 75 | 100 | 120 | | | | | | | |
| G | 5.5 | 5.5 | 5.5 | 5.5 | 5.5 | ∅ 12 | ∅ 12 | ∅ 12 | ∅ 12 | ∅ 12 | ∅ 12 | ∅ 12 |
| H | 1 | 1.5 | 1.5 | 1.5 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 |
| I | 25 | 39 | 39 | 45 | 51 | 58 | 58 | 58 | 65 | 65 | 110 | 100 |
| J | M5 | M6 | M6 | M8 | M10 | M10 | M10 | M10 | M12 | M12 | M12 | M16 |
| S | | | | | | | | | | | 43 | 35 |
| T | | | | | | | | | | | 26 | 35 |
| U | | | | | | 70 | 70 | 70 | 70 | 70 | 70 | 100 |
| U1 | | | | | | | | | 45 | 45 | 55 | 61 |
| U2 | | | | | | | | | 35 | 35 | 25 | 34 |
| V | | | | | | 20 | 25 | 25 | 40 | 40 | 60 | 70 |
| W | | | | | | 5 | 6 | 8 | 8 | 8 | 10 | 15 |
| X | | | | | | 15 | 15 | 15 | 20 | 20 | 17 | 20 |
| Y | | | | | | 58 | 58 | 58 | 65 | 65 | 110 | 100 |
| Z | | | | | | ∅ 9 | ∅ 10.5 | ∅ 10.5 | ∅ 14 | ∅ 14 | ∅ 14 | ∅ 14 |

All dimensions in mm; 1 inch = 25.4 mm
Tolerances according: ISO 2768-m/EN 22768-m

Filter Input/Output Connector Cross Sections

| | -33 | -34 | -35 | -40 |
|---------------------------|--------------------|--------------------|--------------------|--------------------|
| | | | | |
| Solid wire | 16 mm ² | 35 mm ² | 50 mm ² | 95 mm ² |
| Flex wire | 10 mm ² | 25 mm ² | 50 mm ² | 95 mm ² |
| AWG type wire | AWG 6 | AWG 2 | AWG 1/0 | AWG 4/0 |
| Recommended torque | 1.5-1.8 NM | 4.0-4.5 NM | 7-8 NM | 17-20 NM |

Please visit www.schaffner.com to find more details on filter connectors.

Headquarters, Global Innovation and Development

Switzerland

Schaffner Group

Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
info@schaffner.com

Sales and Application Centers

Finland

Schaffner Oy

Lohjanharjuntie 1109
08500
Lohja
+ 358 50 468 72 84
finlandsales@schaffner.com

France

Schaffner EMC S.A.S.

16-20 Rue Louis Rameau
95875
Bezons
+33 1 34 34 30 60
francesales@schaffner.com

Germany

Schaffner Deutschland GmbH

Ohiostr. 8
76149
Karlsruhe
+49 721 56910
germanysales@schaffner.com

Italy

Schaffner EMC S.r.l.

Via Ticino, 30
20900
Monza (MB)
+39 335 120 44 32
italysales@schaffner.com

Japan

Schaffner EMC K.K.

ISM Sangenjaya 7F
1-32-12 Kamiyama Setagaya-ku
154-0011
Tokyo
+81 3 5712 3650
japansales@schaffner.com

Singapore

Schaffner EMC Pte Ltd.

Blk 3015A Ubi Road 1 #05-09 Kampong Ubi
Industrial Estate
408705
Singapore
+65 63773283
singaporesales@schaffner.com

Sweden

Schaffner EMC AB

Östermalmströgr 1
114 42
Stockholm
+46 8 5050 2425
swedensales@schaffner.com

Switzerland

Schaffner EMV AG

Industrie Nord
Nordstrasse 5
4542
Luterbach
+41 32 681 66 26
switzerlandsales@schaffner.com

India

Schaffner India Pvt. Ltd

Regus World Trade Centre
WTC 22nd Floor Unit No 2238 Brigade
Gateway Campus 26/1 Dr. Rajkumar Road
Malleshwaram (W)
560055
Bangalore
+91 8067935355
indiasales@schaffner.com

United Kingdom

Schaffner Ltd.

Suite 1 Oakmede Place
Terrace Road
RG42 4JF
Binfield
+44 118 9770070
schaffner.uksales@te.com

United States

Schaffner EMC Inc.

52 Mayfield Avenue
Edison, New Jersey
+1 732 225 9533
usasales@schaffner.com

To find your local partner within Schaffner's global network schaffner.com

© 2025 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.