


EMC/RFI Filters for Industrial Electronics




- Excellent filter performance for applications with high interference levels
- Filters for two-phase supply up to 2x 520 VAC (P-P) available
- Fast and comfortable snap-in installation on popular TS 35 DIN-rails up to 45 A
- Industrial grade terminal blocks for unsurpassed electrical safety




Performance indicators

Attenuation performance

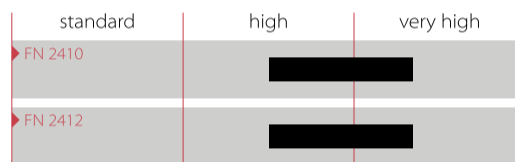

Rated current [A]

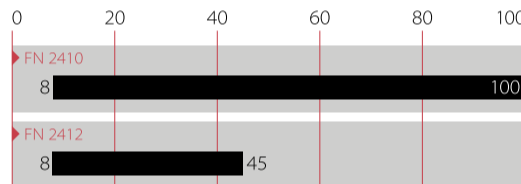

Approvals & Compliances



Features and Benefits

- FN 2410 filters up to 100 A are designed for traditional chassis mounting
- For extra fast installation, FN 2412 filters up to 45 A can comfortably be snapped-in on popular TS 35 DIN-rails which are common in most electrical cabinets
- Both FN 2410 and FN 2412 are also available as H versions. These are ideally suitable for an operation on two phases in a three-phase power network, handling voltages up to 520 VAC
- All filters provide an exceptional conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior. Thus, all filters retain the expected filter performance even in very noisy applications and under full load conditions
- Touch-safe industrial grade terminal blocks provide maximum electrical safety and protect humans from undeliberate contact with live conductors. They help to fulfill the most demanding installation standards


Technical Specifications

| | |
|--|--|
| Maximum continuous operating voltage | 2x 520/300 VAC (H types) 1x 250 VAC |
| Nominal operating voltage | 480 VAC (H types) 230 VAC |
| Rated currents | 8 to 45 A @ 50°C (FN 2412) 8 to 100 A @ 50°C (FN 2410) |
| Overload capability | 4x rated current at switch on, 1.5x rated current for 1 minute, once per hour |
| Operating frequency | DC to 400 Hz |
| High potential test voltage | P → P 2250 VDC for 2 sec (H types) P → E 2000 VAC for 2 sec P → N 1100 VDC for 2 sec P → E 2700 VDC for 2 sec (H types) |
| Temperature range (operation and storage) | -25°C to +100°C (25/100/21) |
| Protection category | IP 20 |
| Flammability corresponding to | UL 94 V-0 |
| Design corresponding to | UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939 |
| MTBF (Mil-HB-217F) | >250,000 h (H types) @ 50°C/480 V >1,200,000 h @ 50°C/230 V |


Typical Applications

- Small to medium-sized machines and industrial equipment
- High-end single-phase power supplies
- Single-phase variable speed motor drives, inverters and converters
- DIN-rail filter versions are ideal for panel building and electrical cabinets
- Various noisy applications with higher power single-phase or two-phase supply

Typical electrical schematic

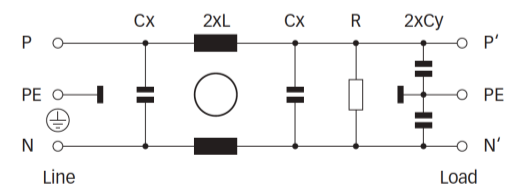

Filter Selection Table

| Filter | Rated current @ 50°C (40°C) | Leakage current* @ 250 VAC /50 Hz (@ 120 VAC /60 Hz) | Power loss @ 25°C/50 Hz | Input/Output connections | Weight |
|-------------------------|--------------------------------|--|----------------------------|---|--------|
| | [A] | [mA] | [W] |  | [kg] |
| FN 2410-8-44 | 8 (8.8) | 2.60 (1.49) | 2.6 | -44 | 0.4 |
| FN 2410-16-44 | 16 (17.5) | 2.60 (1.49) | 3.5 | -44 | 0.5 |
| FN 2410-25-33 | 25 (27.4) | 2.60 (1.49) | 5.5 | -33 | 0.6 |
| FN 2410-32-33 | 32 (35.0) | 2.60 (1.49) | 5.6 | -33 | 0.7 |
| FN 2410-45-33 | 45 (49.3) | 2.60 (1.49) | 7.4 | -33 | 0.7 |
| FN 2410-60-34 | 60 (65.7) | 2.60 (1.49) | 5.5 | -34 | 1.8 |
| FN 2410-80-34 | 80 (87.6) | 2.60 (1.49) | 9.9 | -34 | 1.8 |
| FN 2410-100-34 | 100 (109.5) | 2.60 (1.49) | 15.4 | -34 | 1.8 |
| FN 2410 H-8-44 | 8 (8.8) | 2.60 (1.49) | 2.6 | -44 | 0.5 |
| FN 2410 H-16-44 | 16 (17.5) | 2.60 (1.49) | 3.5 | -44 | 0.6 |
| FN 2410 H-25-33 | 25 (27.4) | 2.60 (1.49) | 5.5 | -33 | 0.7 |
| FN 2410 H-32-33 | 32 (35.0) | 2.60 (1.49) | 5.6 | -33 | 0.8 |
| FN 2410 H-60-34 | 60 (65.7) | 2.60 (1.49) | 5.5 | -34 | 1.9 |
| FN 2410 H-80-34 | 80 (87.6) | 2.60 (1.49) | 9.9 | -34 | 1.9 |
| FN 2410 H-100-34 | 100 (109.5) | 2.60 (1.49) | 15.4 | -34 | 1.9 |
| FN 2412-8-44 | 8 (8.8) | 2.60 (1.49) | 2.6 | -44 | 0.4 |
| FN 2412-16-44 | 16 (17.5) | 2.60 (1.49) | 3.5 | -44 | 0.6 |
| FN 2412-25-33 | 25 (27.4) | 2.60 (1.49) | 5.5 | -33 | 0.7 |
| FN 2412-32-33 | 32 (35.0) | 2.60 (1.49) | 5.6 | -33 | 0.8 |
| FN 2412-45-33 | 45 (49.3) | 2.60 (1.49) | 7.4 | -33 | 0.8 |
| FN 2412 H-8-44 | 8 (8.8) | 2.60 (1.49) | 2.6 | -44 | 0.5 |
| FN 2412 H-16-44 | 16 (17.5) | 2.60 (1.49) | 3.5 | -44 | 0.7 |
| FN 2412 H-25-33 | 25 (27.4) | 2.60 (1.49) | 5.5 | -33 | 0.8 |
| FN 2412 H-32-33 | 32 (35.0) | 2.60 (1.49) | 5.6 | -33 | 0.9 |



* Maximum leakage under normal operating conditions (acc. to IEC60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this level.

Typical Filter Attenuation



Per CISPR 17; A=50 Ω/50 Ω sym; B=50 Ω/50 Ω asym; C=0.1 Ω/100 Ω sym; D=100 Ω/0.1 Ω sym

8 to 45 A types

60 to 100 A types

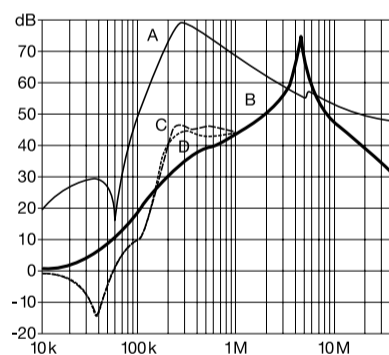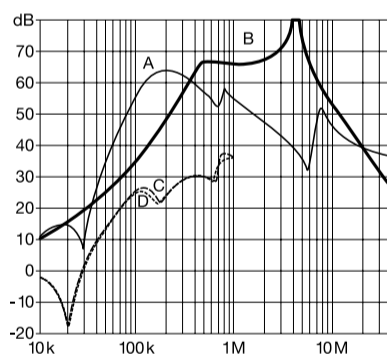

Mechanical Data

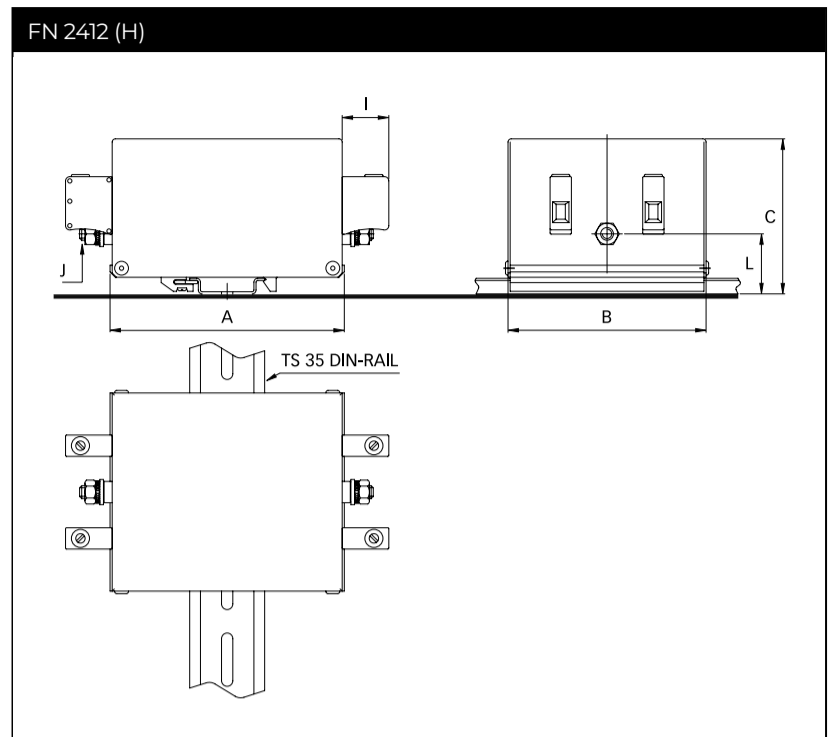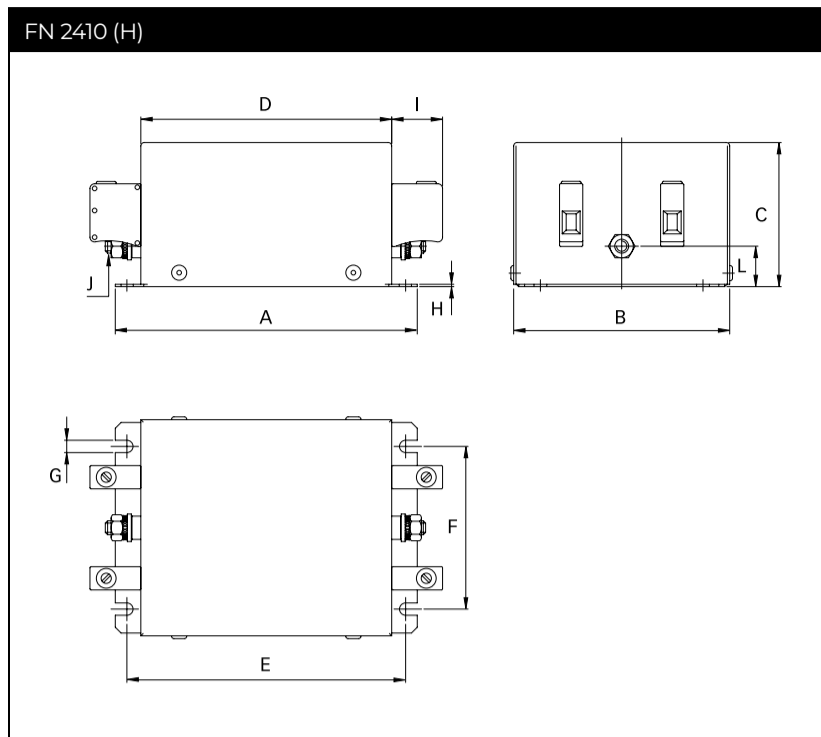

Dimensions

| | FN 2410 | | | | | | FN 2412 | | | | | | |
|-------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | 8 A | 16 A | 25 A | 32 A | 45 A | 60 A | 80 A | 100 A | 8 A | 16 A | 25 A | 32 A | 45 A |
| A | 130 | 130 | 130 | 130 | 130 | 165 | 165 | 165 | 110 | 110 | 110 | 110 | 110 |
| B | 93 | 93 | 93 | 93 | 93 | 115 | 115 | 115 | 93 | 93 | 93 | 93 | 93 |
| C | 62 | 62 | 76 | 76 | 76 | 100 | 100 | 100 | 73 | 73 | 87 | 87 | 87 |
| D | 108 | 108 | 108 | 108 | 108 | 140 | 140 | 140 | | | | | |
| E | 120 | 120 | 120 | 120 | 120 | 155 | 155 | 155 | | | | | |
| F | 70 | 70 | 70 | 70 | 70 | 90 | 90 | 90 | | | | | |
| G | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | 5.3 | | | | | |
| H | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.2 | 1.2 | 1.2 | | | | | |
| I | 22 | 22 | 25 | 25 | 25 | 39 | 39 | 39 | 22 | 22 | 25 | 25 | 25 |
| J | M6 | M6 | M6 | M6 | M6 | M8 | M8 | M8 | M6 | M6 | M6 | M6 | M6 |
| Rec. torque (Nm) | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 8.0 - 9.0 | 8.0 - 9.0 | 8.0 - 9.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 | 3.5 - 4.0 |
| L | 17.5 | 17.5 | 31.5 | 31.5 | 31.5 | 39.2 | 39.2 | 39.2 | 28.5 | 28.5 | 42.5 | 42.5 | 42.5 |

All dimensions in mm; 1 inch = 25.4 mm
Tolerances according to: ISO 2768-m/EN 22768-m

Filter Input/Output Connector Cross Sections

| | -33 | -34 | -44 |
|---------------------------|--------------------|--------------------|--------------------|
| | | | |
| Solid wire | 16 mm ² | 35 mm ² | 10 mm ² |
| Flex wire | 10 mm ² | 25 mm ² | 6 mm ² |
| AWG type wire | AWG 6 | AWG 2 | AWG 8 |
| Recommended torque | 1.5-1.8 Nm | 4.0-4.5 Nm | 1.0-1.2 Nm |

Please visit www.schaffner.com to find more details on filter connectors.

We are here to help



Read more insights from TE's experts:

Connect With Us

We make it easier to connect with our experts and are ready to provide the support you need. Visit te.com/support to chat with a Product Information Specialist.

te.com

©2025 TE Connectivity plc. All Rights Reserved.

TE Connectivity, TE, TE connectivity (logo), and EVERY CONNECTION COUNTS, ECOSine, Schaffner are trademarks owned or licensed by TE Connectivity plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

ED 01/25

schaffner
MORE POWER TO YOU

is now part of

TE
connectivity