

Transistor


PNP, TO-18

multicompPRO



Pin Configuration

1. Emitter
2. Base
3. Collector



Absolute Maximum Ratings

Description	Symbol	Value	Units
Collector Emitter Voltage	V_{CEO}	40	V
Collector Base Voltage	V_{CBO}	60	
Emitter Base Voltage	V_{EBO}	5	
Collector Current Continuous	I_C	600	mA
Power Dissipation at $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	400 2.28	mW mW/ $^\circ\text{C}$
Power Dissipation at $T_c = 25^\circ\text{C}$ Derate above 25°C		1.8 10.3	W mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +200	$^\circ\text{C}$

Electrical Characteristics: ($T_c = +25^\circ\text{C}$ unless specified otherwise)

Description	Symbol	Test Condition	Min.	Max.	Units
Collector Emitter Voltage	$*V_{CEO}$	$I_C = 10\text{mA}, I_B = 0$	40	-	V
Collector Base Voltage	V_{CBO}	$I_C = 10\mu\text{A}, I_E = 0$	60	-	
Emitter Base Voltage	V_{EBO}	$I_E = 10\mu\text{A}, I_C = 0$	5	-	
Collector Cut off Current	I_{CEX}	$V_{CE} = 30\text{V}, V_{BE} = 0.5\text{V}$	-	50	nA
Collector Cut off Current	I_{CBO}	$V_{CB} = 50\text{V}, I_E = 0$	-	20	
		$V_{CB} = 50\text{V}, I_E = 0,$ $T_A = 150^\circ\text{C}$	-	20	A
Base Current	I_B	$V_{CE} = 30\text{V}, V_{BE} = 0.5\text{V}$	-	50	nA
DC Current Gain	h_{FE}	$I_C = 0.1\text{mA}, V_{CE} = 10\text{V}$ $I_C = 1\text{mA}, V_{CE} = 10\text{V}$ $I_C = 10\text{mA}, V_{CE} = 10\text{V}$ $*I_C = 150\text{mA}, V_{CE} = 10\text{V}$ $*I_C = 500\text{mA}, V_{CE} = 10\text{V}$	-	>35 >50 >75 100 - 300 >30	-

*Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO

Transistor PNP, TO-18

multicompPRO


Description	Symbol	Test Condition	Min.	Max.	Units
Small Signal Characteristics					
Collector Emitter Saturation Voltage	*V _{CE(SAT)}	I _C = 150mA, I _B = 15mA I _C = 500mA, I _B = 50mA	-	0.4 1.6	V
Base Emitter Saturation Voltage	*V _{BE(SAT)}	I _C = 150mA, I _B = 15mA I _C = 500mA, I _B = 50mA	-	1.3 2.6	
Transition Frequency	**f _T	I _C = 50mA, V _{CE} = 20V f = 100MHz	200	-	MHz
Output Capacitance	C _{OBO}	V _{CB} = 10V, I _E = 0 f = 100KHz	-	8	pF
Input Capacitance	C _{I BO}	V _{BE} = 2V, I _C = 0 f = 100KHz	-	30	

Description	Symbol	Test Condition	Min.	Max.	Units
Switching Time					
Delay Time	t _d	I _C = 150mA, I _{B1} = 15mA, V _{CC} = 30V	-	10	nS
Rise Time	t _r		-	40	
Turn on Time	t _{on}		-	45	
Storage Time	t _s	I _C = 150mA, I _{B1} = I _{B2} = 15mA, V _{CC} = 6V	-	80	
Fall Time	t _f		-	30	
Turn off Time	t _{off}		-	100	

*Pulse Test: Pulse Width ≤300μs, Duty Cycle ≤2%

**f_T is defined as the frequency at which /h_{FE}/ extrapolates to unity

TO-18 Metal Can Package

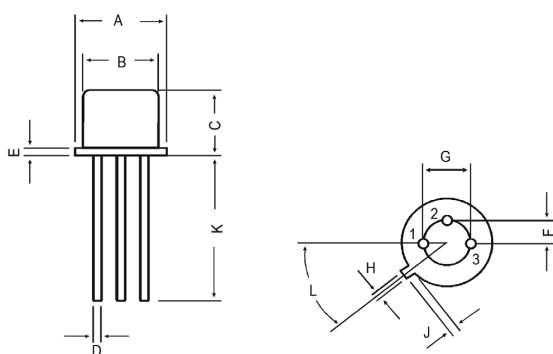

Dim.	Min.	Max.
A	5.24	5.84
B	4.52	4.97
C	4.31	5.33
D	0.4	0.53
E	-	0.76
F	-	1.27

Dim.	Min.	Max.
G	-	2.97
H	0.91	1.17
J	0.71	1.21
K	12.7	-
L	45°	-

Dimensions : Millimetres

Part Number Table

Description	Part Number
Transistor, PNP, TO-18	2N2907

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO