

Fuse disconnect terminal block with pivoting fuse holder; for miniature fuses 5 x 20 mm; 120 V; with blown fuse indication by neon lamp

Item No.: 281-611/281-418



Fuse disconnect terminal block with pivoting fuse holder; for miniature fuses 5 x 20 mm; 120 V; with blown fuse indication by neon lamp

Marking

RoHS ✓
Compliant

Business data

Supplier	WAGO
Item no.	281-611/281-418
GTIN / EAN	4045454871444
Content	1
Order amount	50
Customer item number	

Notes

Safety information 1: Electrical ratings are given by the fuse and blown fuse indication.

Technical data


Miscellaneous


Total number of connection points	2
Total number of potentials	2
Color	gray
Ratings according to 1	IEC/EN 60947-7-3
Pollution degree (1)	3
Rated voltage EN (1) [V]	800 [V]
Rated surge voltage (1) [kV]	8 [kV]
Nominal current [A]	10 [A]


Printview: Fuse disconnect terminal block with pivoting fuse holder; for miniature fuses 5 x 20 mm; 120 V; with blown fuse indication by neon lamp - Item No.: 281-611/281-418

Technical data	
Connection technology (1)	CAGE CLAMP®
Solid sizes 1	0.08 ... 4 mm² / 28 ... 12 AWG
Fine-stranded wires 1	0.08 ... 4 mm² / 28 ... 12 AWG
Strip length 1	9 ... 10 mm / 0.35 ... 0.39 in
Type of wiring	Front-entry wiring
Design	angled
Marking level	Center marking
Insulating material	Polyamide 66 (PA 66)
Fire load [MJ]	0.333 [MJ]
Weight [g]	17.538 [g]
Width	8 mm / 0.315 in
Height from upper-edge of DIN-rail [mm]	60 [mm]
Height from upper-edge of DIN-rail	60 mm / 2.362 in
Length	60 mm / 2.362 in
Type of mounting	DIN 35 rail
Safety information 2	Leakage current in case of blown fuse: Neon lamp < 0.4mA

Images & drawings

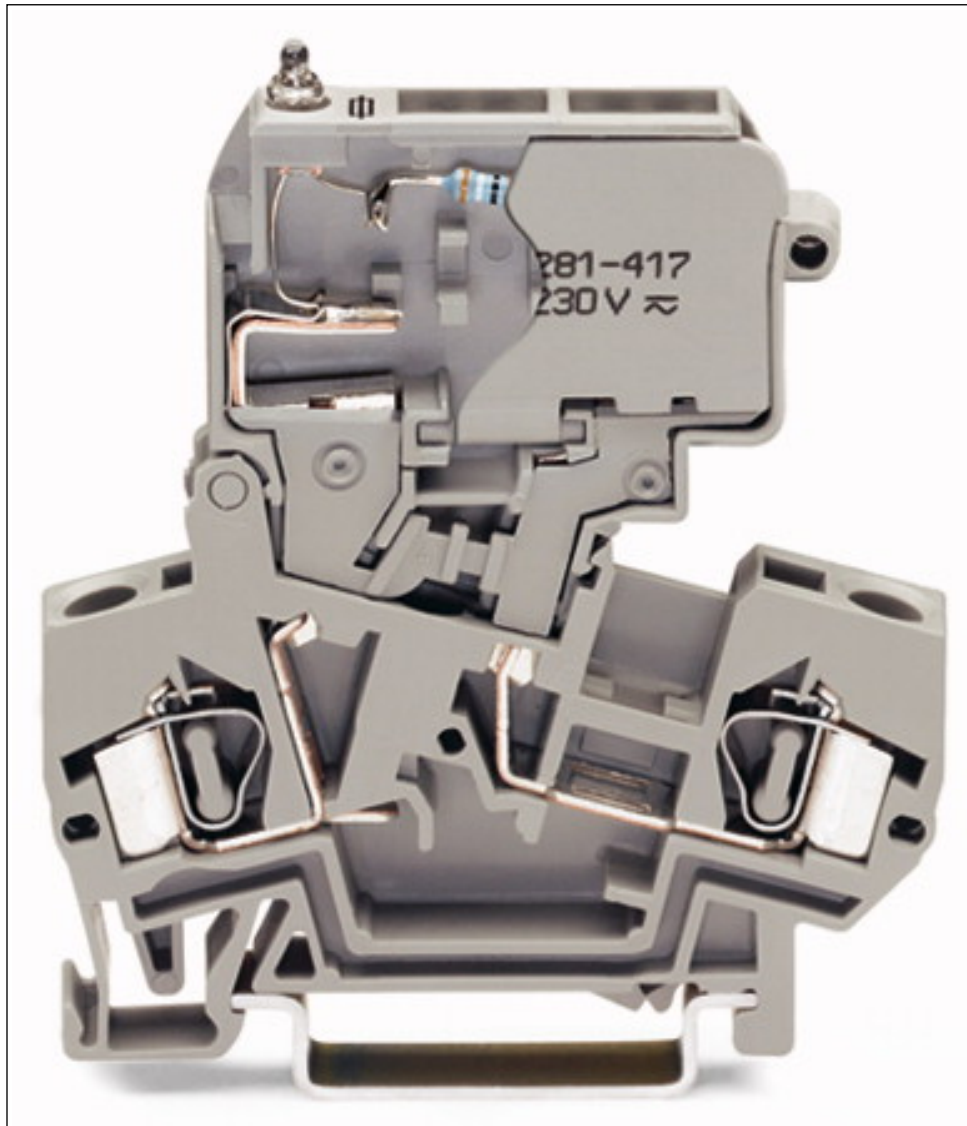

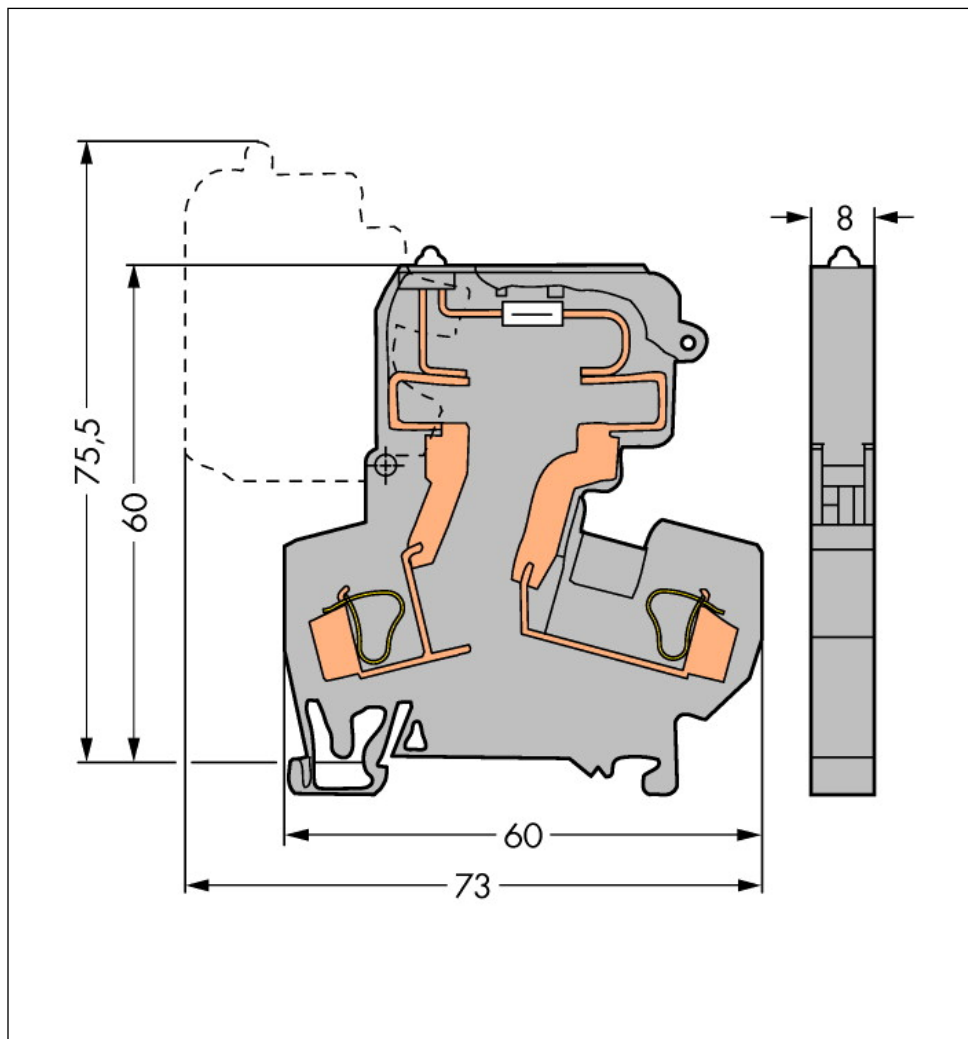

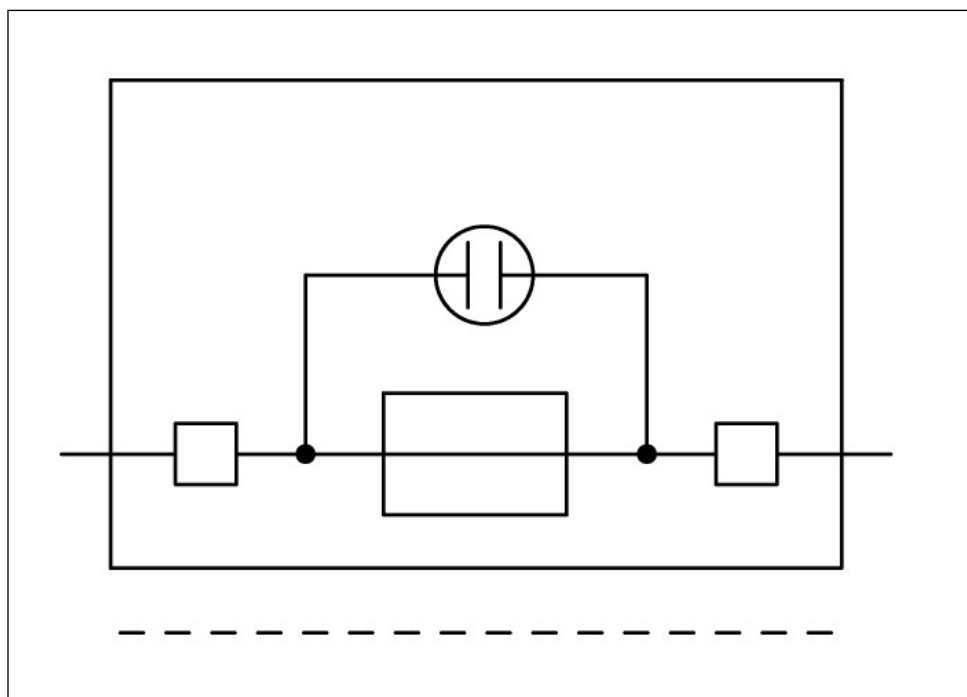

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.