


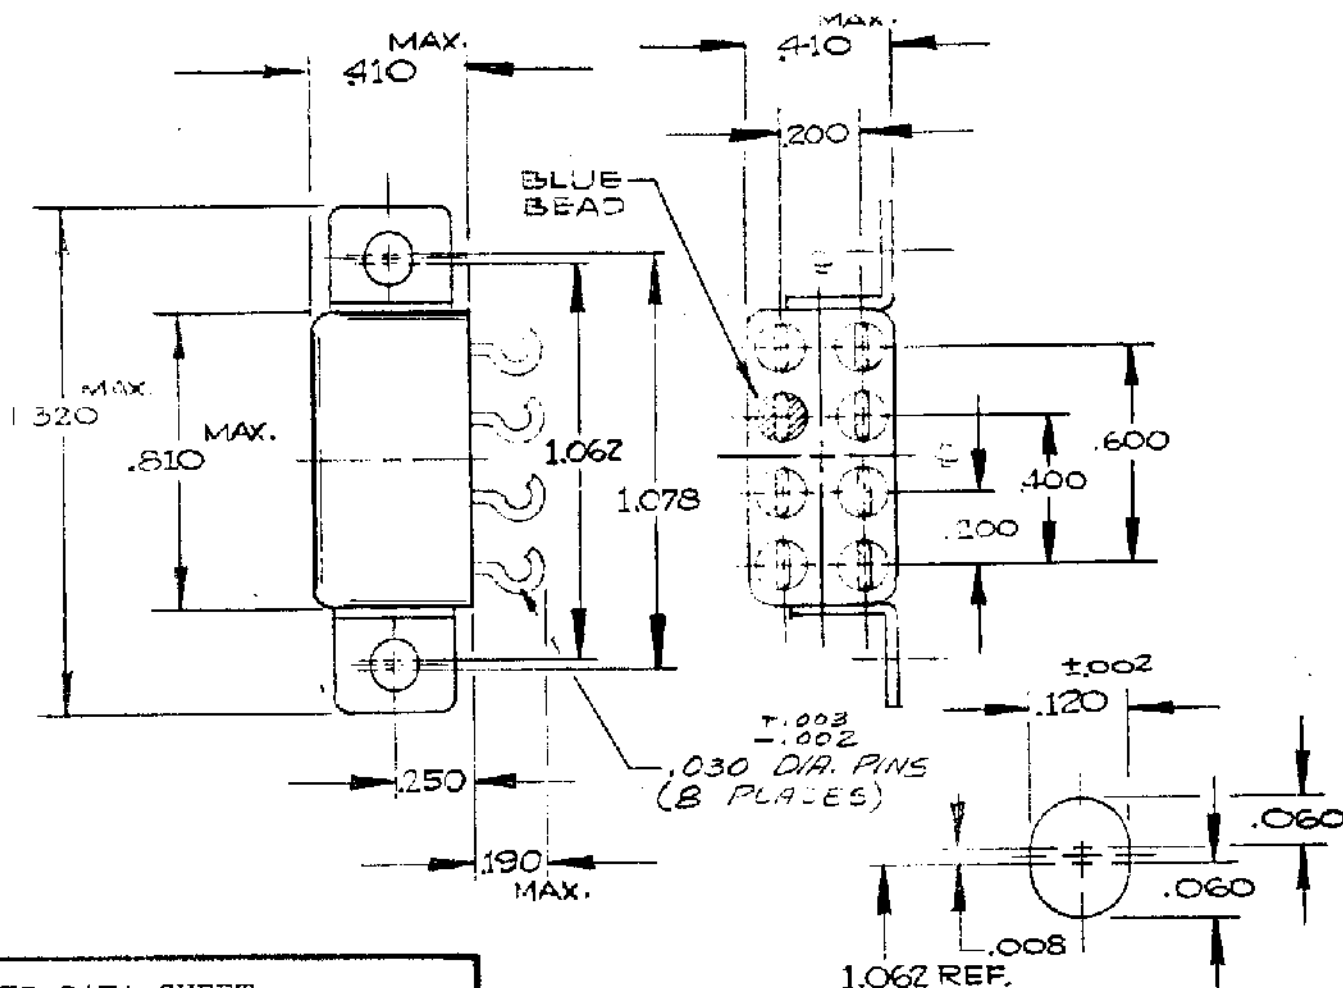

CUSTOMER DATA SHEET

COIL @ +25° C

RESISTANCE $700\Omega \pm 10\%$

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 1.5 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS AT 30 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

TOLERANCE UNLESS OTHERWISE SPECIFIED
DECIMALS $\pm .005$ FRACTIONAL $\pm 1/64$

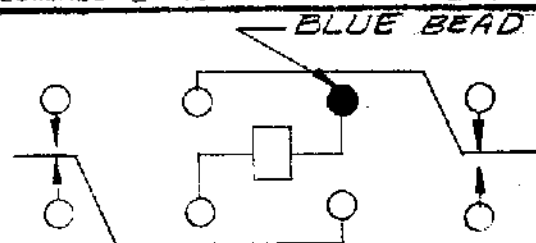

CONTACT RATING: LOW LEVEL TO -
2 AMP @ 28 VDC RESISTIVE
100,000 OPERATIONS

DR.2-2-84

CK. OSW



Communications
Instruments, Inc.

CUST. QPL
CUST. NO. M39016/6-107M

TYPE "HFW" RELAY

HFW 1131 K04 M