

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC--F005.DWG

Mounting Holes




REVISIONS


DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			SHA	13-08-10	JAG	20-08-10	XXX	27-08-10

DOC. NO. SPC--F005 \* Effective: 7/8/02 \* DCP No: 1398

Punched Mounting Hole



Drilled Mounting Hole




Agency Approvals: UL Recognized - Guide IZLT2, File E14853  
CSA Certified - CLASS 6225-01, FILE E47235  
Temperature Rating: 150°C.  
Current: 15A  
Voltage: 250 VAC  
CE Logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC)  
General Information:  
With 1/2" Quick-Connect Bayonet Type Knob  
For 1/4" x 1-1/4" Fuses.  
Vibration Resistant.  
For panels up to 5/16" (7.9mm) thick

Dimensions : Inches (mm)

Part Number Table

Description	Part Number
Panel Mount Fuseholder	MCHKP-HH-RH

When Fuse is Inserted

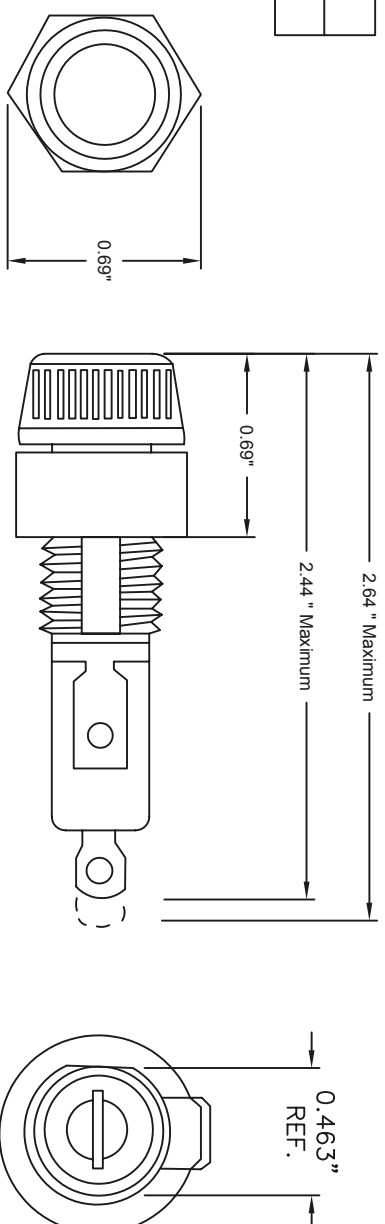

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:	DRAWING TITLE:			
SHA	13-08-10	Panel Mount Fuseholder			
CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	
JAG	20-08-10	A	XXX	92N5192	REV
APPROVED BY:	DATE:	SCALE:	NTS	U.O.M.: Millimeters	SHEET: 1 OF 1
XXX	27-08-10				