

L37-5

Thermal Pad





Features

Good thermal conductivity
Ultra soft and high compressibility
Natural tack
Easy to assemble
Good insulator
Shock & vibration absorber

Applications

Electronic components: IC, CPU, MOS
LED, M/B, P/S, Heat Sink,
LCD-TV, Notebook PC, PC, Telecom Device, Wireless Hub.....etc
DDR II Module, DVD Applications, Hand-set applications.....etc

Thermal Resistance VS. Pressure VS. Deflection

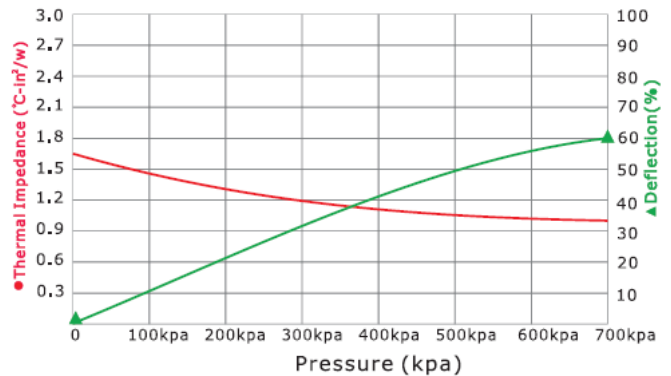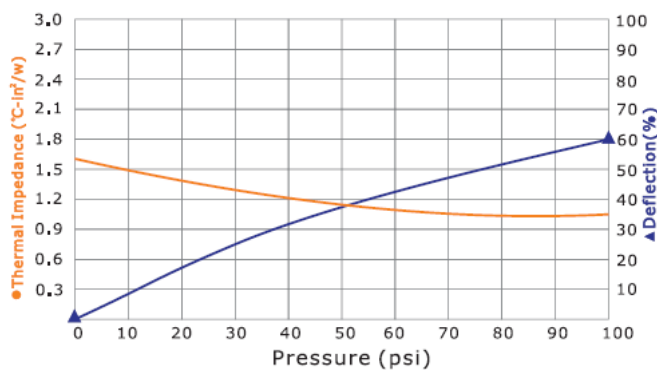


Properties

✓ REACH Compliant

✓ RoHS Compliant

Thermal Conductivity: 1.6 W/m.K



Testing sample thickness: 1.0mm

In "Thermal resistance V.S. Pressure V.S. Deflection" chart, L37-5 provides low thermal impedance. The pressure gets higher, the thermal impedance gets lower, and deflection percentage gets higher. L37-5 provides good compliance and softness.

Hardness: 25 (Shore A)




Properties	L37-5	Unit	Tolerance	Test Method
Color	Gray	-	-	Visual
Thickness	0.3~20	mm	-	ASTM D374
(the thickness can be ordered)	0.0118~0.787	inch	-	ASTM D374
Thermal Conductivity	1.6	W/m.k	±0.16	ASTM D5470
Flame Rating	V-0	-	-	UL 94
Dielectric Breakdown Voltage	>10	kV/mm	±1	ASTM D149
Weight Loss	<1	%	-	ASTM E595
Specific Gravity	2.38	g/cm ³	±0.2	ASTM D792
Working Temperature	-40~+200	°C	-	-
Volume Resistance	>10 ¹²	Ohm-cm	-	ASTM D257
Elongation	300	%	±0.2	ASTM D412
Tensile Strength	12	Kgf/cm ²	±5	ASTM D412
Standard Shape	-	Sheet ones	-	-
Hardness	25	Shore A	±5	ASTM D2240

Need samples?

Available to apply adhesive

Pre-cut for different shapes



1. Choose the P/N
2. Fill into size: x, y, z
3. Apply the adhesive or not? 0= none, 1A= one side, 2A= two sides
4. Fill the quantity you need

T-Global Technology Co., Ltd

No. 33, Ln. 50, Daren Rd., Taoyuan City, Taoyuan County 33068, Taiwan

TEL: +886-3-3618899

FAX: +886-3-3665666

www.tglobalthermal.com

www.tglobal.com.tw

Thermal Interface Materials: Thermal Pad, Thermal Tape, Thermal Grease, Ceramic Heat Spreader



Version1 20131202