


59085 Vane Sensor Features and Benefits



Features

- Sensor and magnet contained in single housing
- Sensor operates when ferrous vane passes through slot
- Normally open, normally closed or change over options
- Choice of cable length and connector


Benefits

- Quick and reliable single screw mounting with location feature
- No standby power requirement
- Hermetically sealed, magnetically operated contacts continue to operate long after optical and other technologies fail due to contamination

Applications

- Position and limit sensing
- Security system switch
- Linear actuators
- Industrial process control
- Shaft rotation sensing

DIMENSIONS (in) mm

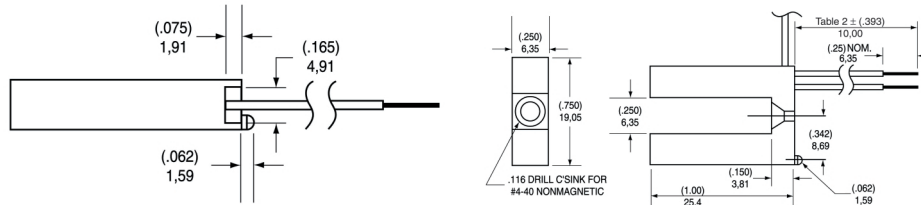

SCHEMATICS	Switch Type
	Black Black 1
	Black Blue White 3
	Black Black 4 & 5


CUSTOMER OPTIONS - Switching Specifications

TABLE 1 Contact Type			Normally Open	Change Over	Normally Closed	Normally Closed H.V.
Switch Type			1	3	4	5
Power	Power	Watt - max.	5	5	10	10
	Switching	Vdc - max.	175	175	200	300
Voltage	Breakdown	Vdc - min.	200	200	250	450
	Switching	A - max.	0.25	0.25	0.5	0.5
Current	Carry	A - max.	1.5	1.5	1.2	1.5
	Contact, Initial	Ω - max.	0.2	0.2	0.2	0.2
Resistance	Insulation	Ω - min.	10 ⁹	10 ⁹	10 ¹⁰	10 ¹⁰
	Contact	pF - typ.	0.3	0.3	0.3	0.2
Capacitance	Operating	°C	-40 to +105	-40 to +105	-40 to +105	-20 to +105
	Storage	°C	-65 to +105	-65 to +105	-65 to +105	-65 to +105
Temperature	Operate	ms - max.	3.0	3.0	1.0	1.0
	Release	ms - max.	3.0	3.0	1.0	1.0
Shock	11ms 1/2 sine	G - max.	50	50	100	100
Vibration	50-2000 Hz	G - max.	30	30	30	30

CUSTOMER OPTIONS - Cable Length and Termination Specification

TABLE 2 Cable Type:- 24 AWG 7/32 PVC 105°C UL1430/UL1569		TABLE 3 Termination Options:-		ACTIVATION
SELECT OPTION	CABLE LENGTH (in) mm	SELECT OPTION	DESCRIPTION (2 WIRE VERSIONS ILLUSTRATED)	
Standard Lengths		A	Tinned leads	
01	(3.94) 100	B	Crimped terminals	
02	(11.81) 300	C	6.35mm fastons	
03	(19.69) 500	D	AMP MTE 2.54mm pitch	
04	(29.53) 750	E	JST XHP 2.5mm pitch	
05	(39.37) 1000			

ORDERING INFORMATION

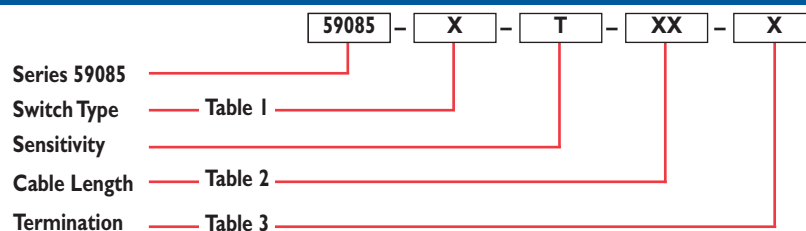

Hamlin USA Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales.us@hamlin.com
Hamlin UK Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: sales.uk@hamlin.com
Hamlin Germany Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 9536666 • Email: sales.de@hamlin.com
Hamletrol France Tel: +33 (0) 1 4687 0202 • Fax: +33 (0) 1 4686 6786 • Email: sales.fr@hamlin.com