

The GE1A Series

Electronic Timers and Accessories



idtec

GE1A Series

- *Large, clear knob for easy setting* -
- *Adjustable from 0.1 sec to 10 min or 0.1 min to 10 hours* -
- *Delay on make (ON delay) function* -
- *Instant monitoring of operational status by LED indicators* -

IDEC's new GE1A series of timers are single function (On Delay) time delay relays. Extremely easy to configure for a wide variety of set times, the GE1A is a perfect fit for an OEM looking for a simple "plug and play" timing solution. The GE1A handles settings up to 10 hours, and two different contact configurations are designed to meet most application requirements. With IDEC's accessories, DIN rail, socket or through-panel (with a clear plastic protective cover) mounting configurations are available.

Time Ranges

Time ranges are selected using two slide switches on the timer face.

Time Range Code	Slide Switch Positions		Time Ranges
10M	S	X1	0.1 sec to 1 sec
	S	X10	1 sec to 10 sec
	M	X1	0.1 min to 1 min
	M	X10	1 min to 10 min
10H	M	X1	0.1 min to 1 min
	M	X10	1 min to 10 min
	H	X1	0.1 hour to 1 hour
	H	X10	1 hour to 10 hours




www.idec.com

GE1A Series



Part No. Development

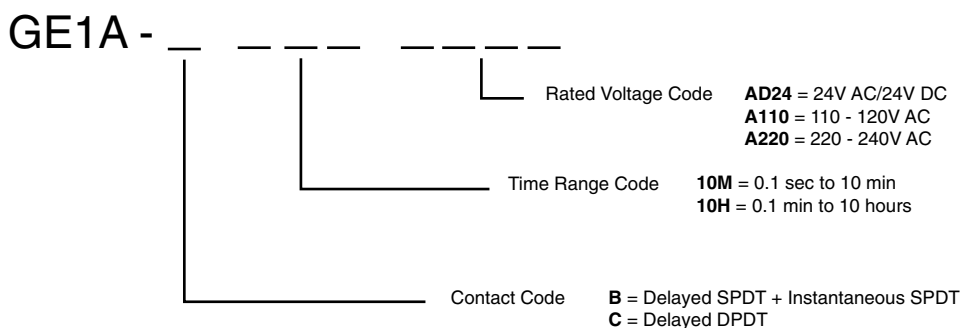

Variations

Time Range	Rated Voltage	Contacts	
		Delayed SPDT + Instantaneous SPDT	Delayed DPDT
0.1 sec to 10 min	24V AC/DC	GE1A-B10MAD24	GE1A-C10MAD24
	110 - 120V AC	GE1A-B10MA110	GE1A-C10MA110
	220 - 240V AC	GE1A-B10MA220	GE1A-C10MA220
0.1 min to 10 hours	24V AC/DC	GE1A-B10HAD24	GE1A-C10HAD24
	110 - 120V AC	GE1A-B10HA110	GE1A-C10HA110
	220 - 240V AC	GE1A-B10HA220	GE1A-C10HA220





Contact Ratings

Contact Ratings	240V AC/5A, 24V DC/5A (resistive load)
Electrical Life	100,000 operations minimum (at full rated load)
Mechanical Life	10,000,000 operations minimum

Specifications

Time Range	0.1 second to 10 hours	
Rated Operational Voltage	24V AC/DC, 110 to 120V AC, 220 to 240V AC	
Voltage Tolerance	AC: 85 to 110%, DC: 90 to 110%	
Operating Temperature	-10 to +55°C (without freezing)	
Storage Temperature	-30 to +80°C (without freezing)	
Operating Humidity	35 to 85% RH (without condensation)	
Repeat Error	±0.2% ±10 ms maximum	
Voltage Error	±0.5% ±10 ms maximum	
Temperature Error	±3% maximum	
Setting Error	±10% maximum	
Insulation Resistance	100 MΩ minimum (500V DC megger)	
Dielectric Strength	Between power and output terminals: 1,500V AC, 1 minute Between contact circuits: 750V AC, 1 minute	
Vibration Resistance	Damage limits: Amplitude 0.75 mm, 10 to 55 Hz Operating extremes: Amplitude 0.5 mm, 10 to 55 Hz	
Shock Resistance	Damage limits: 500 m/s ² (Approx. 50G)	
Power Consumption	GE1A-B	GE1A-C
	24V AC	2.0VA
	24V DC	0.8W
	110V AC (60/50 Hz)	3.5VA/3.0VA
	220V AC (60/50 Hz)	8.0VA/7.0VA

Internal Connections



Operation Charts

GE1A-B

Item	Terminal No.	Operation			
Power	2-7 (Power)	Preset Time			
Delayed Contact	8-5 (NC)				
	8-6 (NO)				
Instantaneous Contact	1-4 (NC)				
	1-3 (NO)				
LED Indicator	POWER				
	OUT				

GE1A-C

Item	Terminal No.	Operation			
Power	2-7 (Power)	Preset Time			
Delayed Contact	1-4, 8-5 (NC)				
	1-3, 8-6 (NO)				
LED Indicator	POWER				
	OUT				

Accessories



Screw Terminal Socket
For Panel Mounting
Part No. SR6P-M08G



Panel Mount
Adapter
Part No. GE9Z-AD



Dust Cover
Part No. GE9Z-C48

DIN rail mount accessories also available.

idec

www.idec.com

International Sales Offices

UNITED STATES

IDEC CORPORATION

1175 Elko Drive
Sunnyvale, CA 94089-2209, USA
Tel (408) 747-0550
Toll Free (800) 262-IDEC
Fax (408) 744-9055
Fax (800) 635-6246
E-mail: opencontact@idec.com
www.idec.com

CANADA

IDEC CANADA LIMITED

Eastern Regional Office
Unit 22-151 Brunel Road
Mississauga, Ontario, L4Z 1X3, Canada
Tel (905) 890-8561
Toll Free (888) 317-4332
Fax (905) 890-8562

CANADA

IDEC CANADA LIMITED

Corporate and Western Regional Office
#205-7560A Vantage Way
Delta B.C. V4G 1H1, Canada
Toll Free (888) 578-9988
Fax (888) 649-3339
E-mail: sales@ca.idec.com

IDEC AUSTRALIA PTY. LTD.

2/3 Macro Court
Rowville, Victoria 3178, Australia
Toll Free 1800-68-4332
Fax (03) 9763-3255
E-mail: sales@au.idec.com

JAPAN

IDEC IZUMI CORPORATION

7-31, Nishi-Miyahara
1-Chome, Yodogawa-ku
Osaka 532-8550, Japan
Tel (06) 6398-2571
Fax (06) 6392-9731
www.izumi.com

IDEC EUROPEAN HEADQUARTERS

Unit 2 Beechwood
Chineham Business Park
Basingstoke
Hampshire RG24 8WA, United Kingdom
Tel (01256) 321000
Fax (01256) 327755
E-mail: idec@uk.idec.com

GERMANY

IDEC ELEKTROTECHNIK GmbH

Wendenstraße 331
D-20537 Hamburg, Germany
Tel (040) 25 11 91
Fax (040) 25 4 33 61
E-mail: service@idec.de

IDEC IZUMI (H.K.) CO., LTD.

Room No.1409, Tower 1 Silvercord
30 Canton Road, Tsimshatsui
Kowloon, Hong Kong
Tel (02) 376-2823
Fax (02) 376-0790

SINGAPORE






IDEC IZUMI ASIA PTE. LTD.

No. 31, Tannery Lane #05-01
Dragon Land Building,
Singapore 347788
Tel (65) 746-1155
Fax (65) 844-5995

IDEC TAIWAN CORPORATION

3F, No.75, Hsin Tai Wu Road, Sec. 1
Hsi-Chih, Taipei County, Taiwan
Republic of China
Tel (02) 2698-2601
Fax (02) 2698-2710
E-mail: idectpe@idectwn.hinet.net

Dimensions

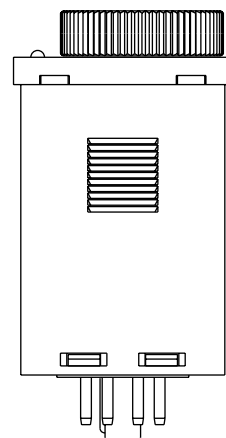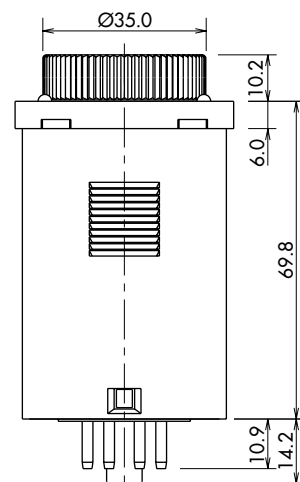

Dimensions in mm

www.idec.com

©2000 IDEC Corporation. All Rights Reserved.
Catalog No. EP936-0 6/00 3K