



Compression clamp/ compression clamp and compression clamp/ quick-connect terminal blocks

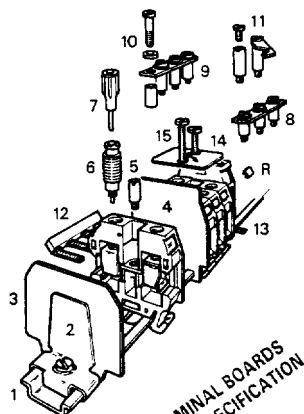

PREASSEMBLED TERMINAL BOARDS
AVAILABLE ON YOUR SPECIFICATION

DR 1,5/5

Spacing 5 mm + 0,08 (200")




DR 4/6

DR 4/6.N

Spacing 6 mm + 0,05 (238")



150 - 221



Type	Part number	Type	Part number	Type	Part number
Grey body Tapped connector bar M 2,6 DR 1,5/5	112 086.02			Grey body DR 4/6 Blue body Tapped connector bar M 2,6 DR 4/6 N	110 491.17 120 491.11

Characteristics

		DIN-VDE	UL	CSA	NFC-UTE	DIN-VDE	UL	CSA	NFC-UTE	DIN-VDE	UL	CSA	NFC-UTE
Wire size (see generalities)	Comp clamp	Solid wire	0-2,5 mm ²	22-12 AWG	14 AWG	0-2,5 mm ²				0-4 mm ²	28-12 AWG	18-12 AWG	0-4 mm ²
	Quick-connect	Stranded wire	0-1,5 mm ²			0-1,5 mm ²				0-4 mm ²			0-4 mm ²
Rated voltage	V	~ AC	250 Gr C	300	300	125 Cat C				500 Gr C	250	300	150
	V	= DC	300 Gr C			125 Cat C				600 Gr C			250 Cat C
Rated current	A		20	20	20	22				35	20	10	25
Rated wire size			1,5 mm ²	12 AWG	14 AWG	1,5 mm ²				4 mm ²	12 AWG	12 AWG	2,5 mm ²

Other characteristics

	Wire stripping length	Recommended screwdriver	Recommended torque	Protection	Wire stripping length	Recommended screwdriver	Recommended torque	Protection	Wire stripping length	Recommended screwdriver	Recommended torque	Protection
For compression clamp connection	8,5 mm 34"	3,5 mm							9,5 mm 38"	4 mm		
Approvals (Contact Entelec)	UL			By					UL			

Accessories

	Type	Part number	Type	Part number	Type	Part number
1 Rail 15x5 DIN 2	PR2	prepunched	164 600.12	PR2	prepunched	164 600.12
2 End stop	BA2	th. 10 mm	164 716.21	BA2	th. 10 mm	164 716.21
3 End section	FEDR5	th. 1 mm	117 318.23	FEDR61	th. 1 mm	117 600.03
4 Circuit separator				FEDR61	th. 1 mm	127 600.05
5 Test socket	AL2	DIA. 2 mm	167 319.06	SCDR61	th. 0,3 mm	173 016.10
6 Test device				AL2	DIA. 2 mm	167 319.06
7 Test plug	FC2	DIA. 2 mm	7 865.26	FC2	DIA. 2 mm	7 865.26
8 Assembled jumper bar				BJM62 (1)	2 poles	173 217.26
				BJM62 (1)	3 poles	173 218.07
				BJM62 (1)	4 poles	173 219.00
				BJM62 (1)	5 poles	173 221.22
				BJM62 (1)	6 poles	174 112.16
				BJM62 (1)	7 poles	174 113.17
				BJM62 (1)	8 poles	174 114.10
				BJM62 (1)	9 poles	174 115.11
				BJM62 (1)	10 poles	173 226.27
9 Jumper bar not preassembled	BJS5	20 poles	177 652.06	BJPD6		173 223.24
		30 poles	164 949.03	PC61	10 poles	163 311.22
	EVD5		167 900.02			
	PC51	10 poles	167 908.06	EPD61		173 206.04
				VSPD61		173 207.05

R See markers and
other accessories
for series DR blocks

⑤
(1) Use of these accessories requires the user to cut out the partition.

⑤

entelec