


MS3V-T1R

Tuning Fork Crystal 30 kHz – 200 kHz



RoHS - compliant

DIMENSIONS

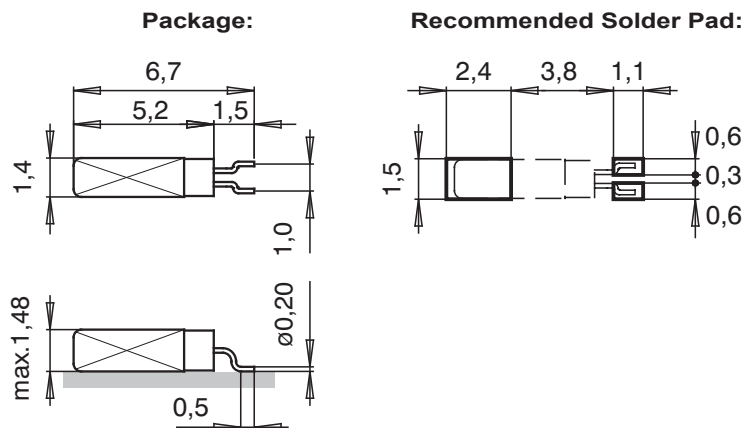

All dimensions in mm typical

Miniature SMT package
Package height 1.48 mm max.
Compatible solder pad layout with plastic molded crystal packages
Industrial temperature range
Very price competitive
Low aging
Low power consumption
High shock and vibration resistance

DESCRIPTION:

The MS3V-T1R is a miniature square-bodied 1.4 x 6.7 x 1.4 mm metal package with formed leads, intended for surface mounting and reflow soldering.

Within the package is a high-quality tuning fork quartz crystal resonator, manufactured with a precision high-volume photolithographic process and operating in the fundamental mode.

Due to highly automated, large-volume production, the MS3V-T1R is very price competitive and ideal for any consumer and industrial applications.

For pick-and-place equipment, the crystals are supplied in 16 mm tape:

7" (178 mm) reel with 2'000 crystals

13" (330 mm) reel with 9'000 crystals

ELECTRICAL CHARACTERISTICS AT 25°C:

Frequency Range	F_L	30–200	kHz
Load capacitance ¹⁾	C_L	7.0 / 9.0 / 12.5	pF
Frequency tolerance ²⁾	$\Delta F/F$	+/-20	ppm
	$\Delta F/F$	+/-100	ppm
Drive level max.	P	1.0	μW
Insulation resistance min.	R_i	500	M Ω
Aging first year max.	$\Delta F/F$	+/-3	ppm

Frequency Example ³⁾	F_L	32.768	75.000	76.800	kHz
Series resistance typ./max.	R_s	50 / 65	19 / 30	18 / 30	k Ω
Motional capacitance typ.	C_1	2.1	1.45	1.35	fF
Static capacitance typ.	C_0	0.9	0.9	0.9	pF
Turnover temperature	T_0	25 +/-5	22 +/-5	22 +/-5	°C
Frequency vs. temperature	$\Delta F/F_0$	$-0.035 \text{ ppm}/^\circ\text{C}^2 (T - T_0)^2 \text{ +/-10\%}$			ppm

1) For standard and other load capacitances consult factory.

2) Tighter and wider frequency tolerances on request.

3) Values for other frequencies consult factory.

STANDARD FREQUENCIES:

Frequency kHz				
32.768	38.400	75.000	76.800	77.500
Other frequencies on request				

**ENVIRONMENTAL
CHARACTERISTICS:**

		Conditions	Max. Dev.
Storage temperature range		-55 to +85°C	
TA Operating temperature range		-40 to +85°C	
Shock resistance	$\Delta F/F$	5000 g, 0.3 ms, 1/2 sine	+/-5 ppm
Vibration resistance	$\Delta F/F$	20 g / 10–2000 Hz	+/-5 ppm

**TERMINATIONS AND
PROCESSING:**

Type	Termination	Processing
MS3V-T1R	Can: Pd plated Leads: Formed leads Au flashed	For SMD mounting Reflow soldering 260°C / 20 sec. max

**PRODUCT DESCRIPTION AND
ORDERING INFORMATION:**

MS3V-T1R	32.768kHz	12.5pF	+/-20ppm	TA	QC
<u>Frequency F_0</u>					
<u>C_L Load Capacitance</u>					
7.0 pF					
9.0 pF					
12.5 pF					
<u>Frequency tolerance</u>					
+/- 20 ppm					
+/- 100 ppm					
			<u>Temperature Range</u>		
			TA = -40 to 85°C (Standard)		
Optional: if not defined, ,Standard' will apply					
			<u>Qualification</u>		
			QC = Commercial (Standard)		
A unique part number will be generated for each product specification, i.e:					
20xxxx-ML02		2'000 pcs (in 16mm tape on 7" reel)			
20xxxx-PL09		9'000 pcs (in 16mm tape on 13" reel)			
Please contact us.					

All specifications subject to change without notice.