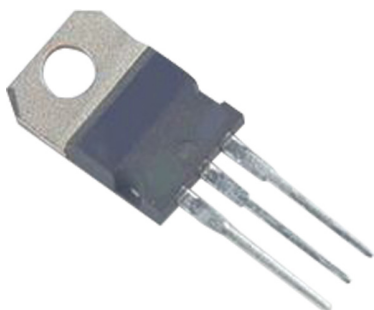


Pin Configuration:

1. Base
2. Collector
3. Emitter
4. Collector

Feature:

- Complementary Silicon Transistors Intended for a Wide Variety of Switching and Amplifier Applications, Series and Shunt Regulators, Driver and Output Stages of Hi-Fi Amplifiers

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$):

Description	Symbol	TIP41C	Unit
Collector Emitter Voltage	V_{CEO}	100	V
Collector Base Voltage	V_{CBO}		
Emitter Base Voltage	V_{EBO}		
Collector Current Continuous	I_C	6	A
Collector Current Peak	I_{CM}	10	
Base Current	I_B	2	
Power Dissipation upto $T_c = 25^\circ\text{C}$ Derate above 25°C	P_D	65 520	W mW/ $^\circ\text{C}$
Power Dissipation upto $T_a = 25^\circ\text{C}$ Derate above 25°C		2 16	
Unclamped Inductive Load Energy	*E	62.5	mJ
Storage Temperature	T_{stg}	150	$^\circ\text{C}$
Junction Temperature	T_j	- 65 to +150	

Thermal Resistance

Junction to Case	$R_{th(j-c)}$	1.92	$^\circ\text{C/W}$
Junction to Ambient in Free Air	$R_{th(j-a)}$	62.5	

* $I_C = 2.5\text{A}$, $L = 20\text{mH}$, P.R.F. = 10Hz, $V_{cc} = 10\text{V}$, $R_{BE} = 100\Omega$

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless specified otherwise):

Description	Symbol	Test Condition	Min.	Max.	Unit
Collector Emitter Voltage	$*V_{CEO}$	$I_C = 30\text{mA}, I_B = 0$	100	-	V
Collector Cut off Current	I_{CEO}	$V_{CE} = 60\text{V}, I_B = 0$	-	0.7	mA
Collector Cut off Current	I_{CES}	$V_{CE} = V_{CEO} (\text{max.}), V_{BE} = 0$	-	0.4	
Emitter Cut off Current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$	-	1	
DC Current Gain	$*h_{FE}$	$I_C = 0.3\text{A}, V_{CE} = 4\text{V}$ $I_C = 3\text{A}, V_{CE} = 4\text{V}$	30 15	75	-
Collector Emitter Saturation Voltage	$*V_{CE(sat)}$	$I_C = 6\text{A}, I_B = 0.6\text{A}$	-	1.5	V
Base Emitter on Voltage	$*V_{BE(on)}$	$I_C = 6\text{A}, V_{CE} = 4\text{V}$	-	2	


*Pulse Test : Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$.

Dynamic Characteristics

Description	Symbol	Test Condition	Min.	Max.	Unit
Small Signal Current Gain	h_{fe}	$I_C = 0.5\text{A}, V_{CE} = 10\text{V}, f = 1\text{kHz}$	20	-	-
Transition Frequency	f_T	$I_C = 0.5\text{A}, V_{CE} = 10\text{V}, f = 1\text{MHz}$	3	-	MHz

Switching Characteristics

Description	Symbol	Test Condition	Typical	Unit
Turn On Time	t_{on}	$V_{cc} = 30\text{V}, I_C = 6\text{A}, I_{B1} = I_{B2} = 0.6\text{A},$ $R_L = 5\Omega$	0.6	μs
Turn Off Time	t_{off}		1.4	

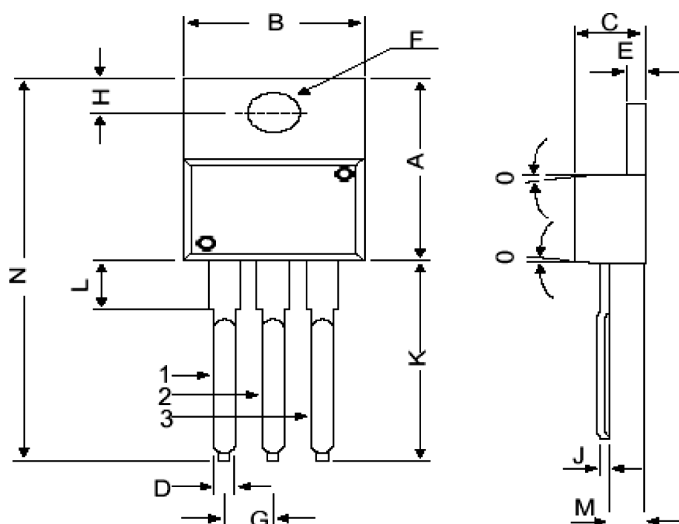

Pin Configuration:

1. Base
2. Collector
3. Emitter
4. Collector

Dimensions	Min.	Max.
A	14.42	16.51
B	9.63	10.67
C	3.56	4.83
D	-	0.9
E	1.15	1.4
F	3.75	3.88
G	2.29	2.79
H	2.54	3.43
J	-	0.56
K	12.7	14.73
L	2.8	4.07
M	2.03	2.92
N	-	31.24
O	7°	

Dimensions : Millimetres

Part Number Table

Description	Part Number
Transistor, NPN, TO-220	TIP41C

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.