

Pin Configuration:

1. Emitter
2. Collector
3. Base

Feature:

- PNP Plastic Medium Power Silicon Transistor
- Designed for use Line-Operated Applications Such as Low Power, Line Operated Series Pass and Switching Regulator Requiring PNP Capability

Absolute Maximum Ratings


Description	Symbol	Rating	Unit
Collector Base Voltage	V_{CBO}	300	V
Collector Emitter Voltage	V_{CEO}		
Emitter Base Voltage	V_{EBO}	3	
Collector Current Continuous	I_C	500	mA
Power Dissipation at $T_c = 25^\circ\text{C}$ Derate above 25°C	P_D	20 0.16	W mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_j, T_{stg}	-65 to +150	$^\circ\text{C}$

Thermal Resistance

Junction to Case	$R_{th(j-c)}$	6.25	$^\circ\text{C/W}$
Junction to Ambient	$R_{th(j-a)}$	83.3	

Electrical Characteristics ($T_c = 25^\circ\text{C}$ unless specified otherwise)

Parameter	Symbol	Test Condition	Minimum	Maximum	Unit
Collector Emitter Breakdown Voltage	$V_{CEO(SUS)}$	$I_C = 1\text{mA}, I_B = 0$	300	-	V
Collector Cut off Current	I_{CBO}	$V_{CB} = 300\text{V}, I_E = 0$	-	100	μA
Emitter Cut off Current	I_{EBO}	$V_{EB} = 3\text{V}, I_C = 0$	-		
DC Current Gain	h_{FE}	$I_C = 0.05\text{A}, V_{CE} = 10\text{V}$	30	240	-

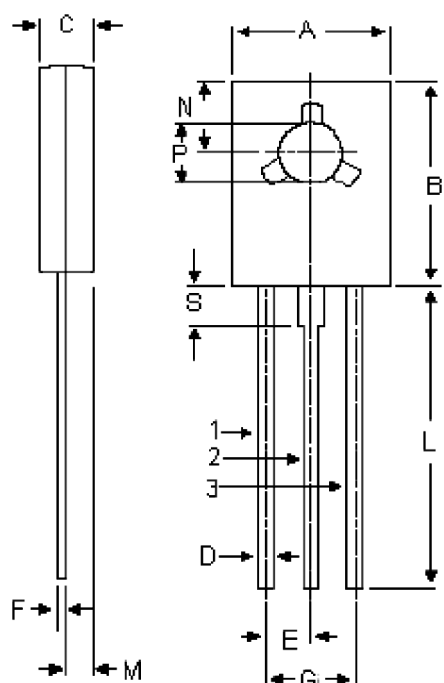

Dimensions	Min.	Max.
A	7.4	7.8
B	10.5	10.8
C	2.4	2.7
D	0.7	0.9
E	2.25 (Typical)	
F	0.49	0.75
G	4.5 (Typical)	
L	15.7 (Typical)	
M	1.27 (Typical)	
N	3.75 (Typical)	
P	3	3.2
S	2.5 (Typical)	

Dimensions : Millimetres

Pin Configuration:

1. Emitter
2. Collector
3. Base

Part Number Table

Description	Part Number
Transistor, PNP, TO-126	MJE350

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.