

Description:

- NPN Silicon Planar Epitaxial Transistors

Pin Configuration:

1. Emitter
2. Collector
3. Base

Absolute Maximum Ratings

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	30	V
Collector-Base Voltage	V_{CBO}	50	
Emitter Base Voltage	V_{EBO}	5	
Collector Current Continuous	I_C	600	mA
Power Dissipation at $T_a = 25^\circ\text{C}$ Derate Above 25°C	P_D	625 5	mW mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_j, T_{stg}	-55 to +150	$^\circ\text{C}$

Thermal Resistance

Junction to Ambient	$R_{th(j-a)}$	200	$^\circ\text{C/W}$
---------------------	---------------	-----	--------------------

Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless specified otherwise)

Characteristics	Symbol	Test Condition	Min.	Max.	Unit
Collector Emitter Voltage	BV_{CEO}^*	$I_C = 10\text{mA}, I_B = 0$	30	-	V
Collector Base Voltage	BV_{CBO}	$I_C = 100\mu\text{A}, I_E = 0$	50	-	
Emitter to Base Voltage	V_{EBO}	$I_E = 100\mu\text{A}, I_C = 0$	5	-	
DC Current Gain 2N3705	h_{FE}^*	$I_C = 500\text{mA}, V_{CE} = 2\text{V}$	100	300	-
			50	150	-

*Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2.0\%$.


Electrical Characteristics ($T_a = 25^\circ\text{C}$ unless specified otherwise)

Characteristics	Symbol	Test Condition	Min.	Max.	Unit
Collector Leakage Current	I_{CBO}	$V_{CB} = 20\text{V}, I_E = 0$	-	0.1	μA
Emitter Leakage Current	I_{EBO}	$V_{EB} = 3\text{V}, I_C = 0$	-		
Collector Emitter Saturation Voltage 2N3705	$V_{CE(sat)}^*$	$I_C = 100\text{mA}, I_B = 5\text{mA}$	-	0.6	V
				0.8	
Base Emitter On Voltage	$V_{BE(on)}^*$	$I_C = 100\text{mA}, V_{CE} = 2\text{V}$	0.5	1.0	

Small Signal Characteristics

Output Capacitance	C_{ob}	$I_E = 0, V_{CB} = 10\text{V}, f = 1\text{MHz}$	-	12	pF
Transition Frequency	f_T	$I_C = 50\text{mA}, V_{CE} = 2\text{V}, f = 20\text{MHz}$	100	-	MHz

*Pulse Test : Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2.0\%$.

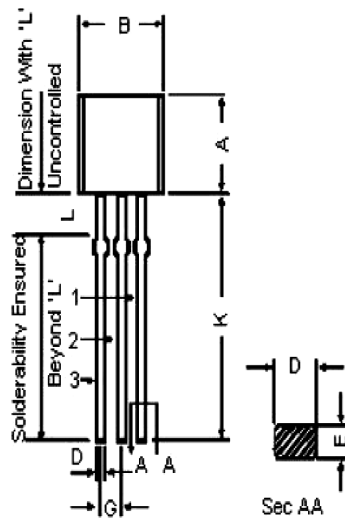


Dimensions	Min.	Max.
A	4.32	5.33
B	4.45	5.2
C	3.18	4.19
D	0.41	0.55
E	0.35	0.5
F	5°	
G	1.14	1.4
H		1.53
K	12.7	-
L	1.982	2.082

Dimensions : Millimetres

Pin Configuration:

1. Emitter
2. Collector
3. Base



Part Number Table

Description	Part Number
Transistor, NPN, TO-92	2N3705

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.